


MODELS	SCALE LENGTH (mm)	REFER DRAWING	A	B	C	D	E	F	EXT. BOX # DRAWING
SQ72 (VOLTMETER & AMMETER UPTO 20A)	64	1	72	51.5	67	68	17	19	-
SQ72 (AMMETER ABOVE 20A)	64	1	72	51.5	67	68	23	19	-
M72,F72,C72, (72QF11,31)	60	1	72	37	66	68	13	19.5	5
72QW11,31,32,33, (72QV11,31,32,33)	60	1	72	37	66	68	13	19.5	4
72LW11,31,32,33, (72LV11,31,32,33)	110	1	72	37	66	68	13	22	4
ML72,MLC72 (Voltmeter),72LF11(#),72LF31(#),FL72(#)	110	1	72	37	66	68	13	22	-
MLC72 (Ammeter)	110	1	72	62	66	68	16	18	-
SQ96 (VOLTMETER & AMMETER UPTO 20A)	97	1	96	51.5	90	92	17	19	-
SQ96 (AMMETER ABOVE 20A)	97	1	96	51.5	90	92	23	19	-
M96 (Above 10A, E=18)	90	1	96	30	90	92	13	19.5	-
96QW11,31,32,33, (96QV11,31,32,33)	90	1	96	102	90	92	16	12	-
96LW11,31,32,33, (96LV11,31,32,33), 96LF11,31,FL96	155		-						
C96,96QF11,31,F96,M96 (4-20mA DC)	90	1	96	48	90	92	13	19.5	-
ML144,MLC144,144LF11,31,FL144	230	1	144	54	136	138	4	19	-
144QF11,31,F144	140	1	144	66	136	138	16	14	-
144QW11,31,32,33 (144QV11,31,32,33)	140	2	144	116	136	138	-	-	-
144LW11,31,32,33 (144LV11,31,32,33)	230	2	144	103	136	138	-	-	-
ML110,MLC110,110LF11,31,FL110	175	3	----As Per Drawing----						-
110LW,11,31,32,33, (110LV11,31,32,33)	175	3	----As Per Drawing----						4
ML96/MLC96 (Above 10A, E=18)	155	1	96	48	90	92	13	22	-

MODELS	SCALE LENGTH (mm)	REFER DRAWING	A	B	C	D	E	F	G	H	I	J	L	O	R	EXT. BOX # DRAWING
MR60,CR60	57	6	60	60	33	24	48	48	51.5	12	-	-	54	4BA	4.5	5 (CR60)
MR65,CR65	68	6	81	81	33	22	64	64	64	12	-	-	67	4BA	4.5	5 (CR65)
MR100,CR100	80	6	100	80	34	21	84	64	63	12	-	7	67	4BA	4.5	5 (CR100)
MR120,CR120	96	6	120	100	38	25	100	80	65	12	-	16	67	4BA	4.5	5 (CR120)


## Dimensions (mm)

**1**

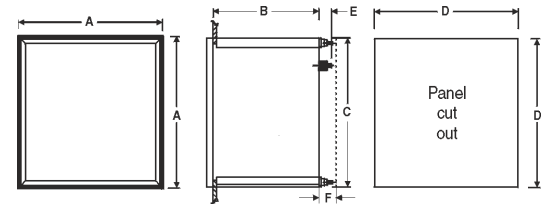


**4** Dimension of DIN Series Power Line Transducers


Case Size	A	B
I	75	60
II	100	85
III	150	135

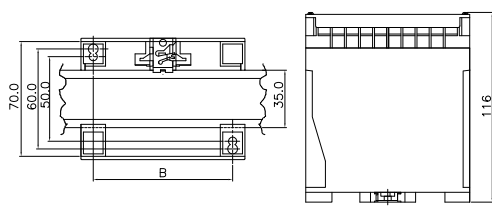


**2**

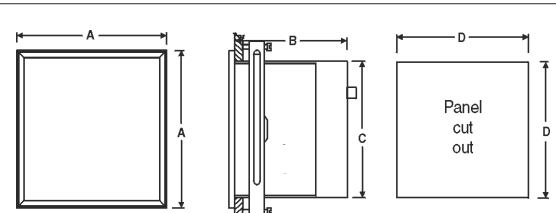


**5**

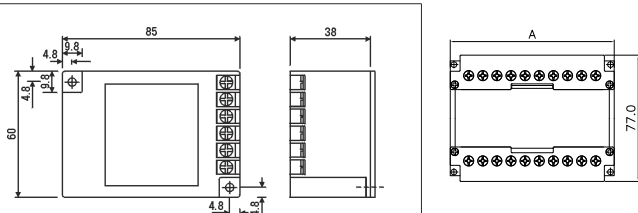

**3**

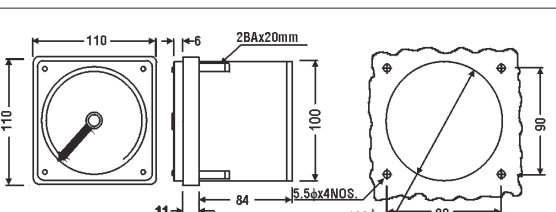

**6**

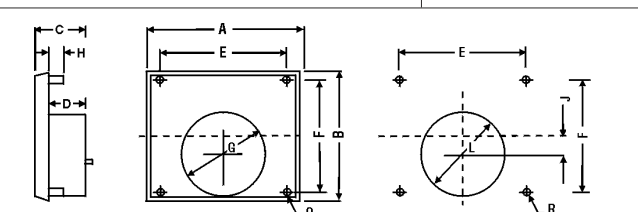

**Note :** # For ranges greater than 100 mA & upto 5A AC use Models CR60, CR65, CR100, CR120, 72LF11,72LF31,FL72 & C72 with External CT Box supplied with the instruments (Drawing 5).