



+60 YEARS
ONE MISSION



Reliable



Long-Lasting




Affordable




ISO 9001:2015 CERTIFICATE



EIL APPROVAL

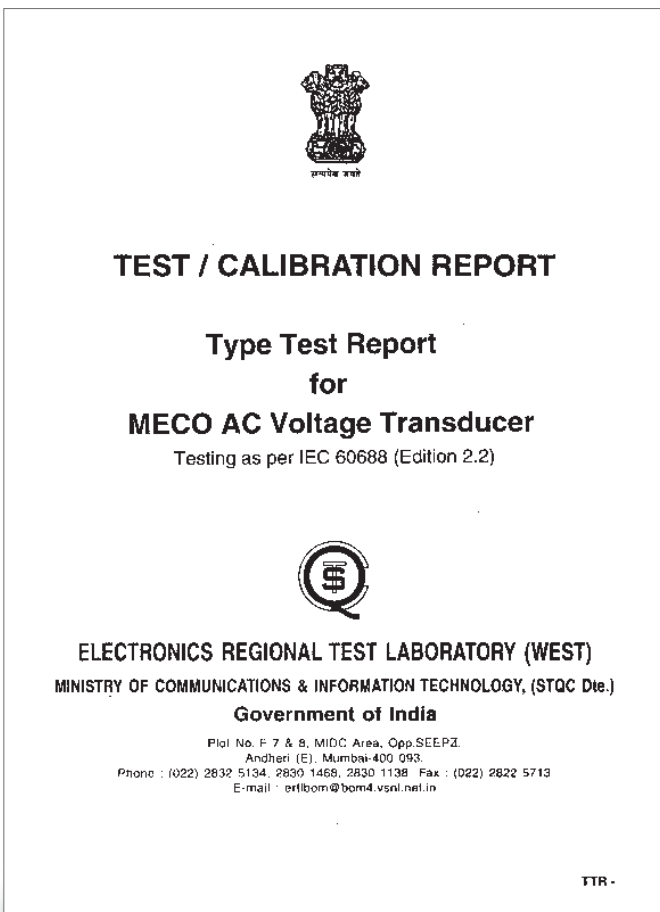

STQC TYPE TEST REPORT

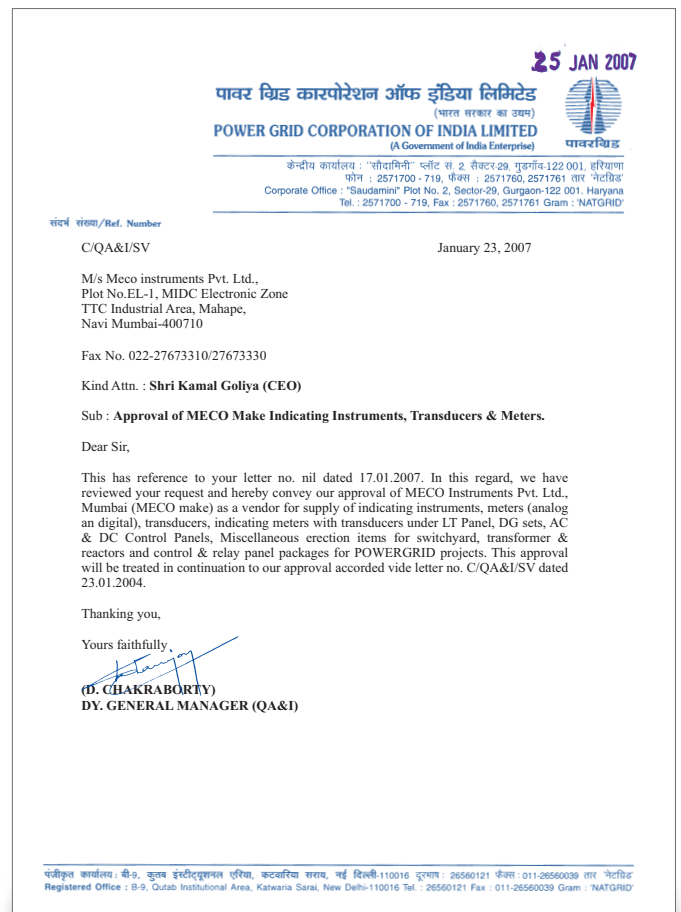

PGCIL APPROVAL

MECO is a pioneering ISO 9001 : 2015 certified company offering reliable, long - lasting and affordable instruments for over 63 years. Our team of skilled and trained personnel is equipped with complete in-house facility for design, development and manufacturing world class products with innovative features. Customer focus, product innovation and technological excellence are the prime concern of each and every member at MECO.

Many of our products have been designed / upgraded by our R & D Department which is recognized by Department of Scientific & Industrial Research, Ministry of Science & Technology, Government of India, New Delhi. We hold over 37 design patents which are registered with The Controller General of Patents, Designs and Trade Marks, Government of India. Our products are certified by India's most reputed testing laboratories including ERTL, IDEMI, Karindikar Laboratories & NPL. The high quality of our products experience is always a great value addition for the end user.

To support our manufacturing process, we have SMT Pick & Place Machine, Solder Reflow Machine, PCB Optical Inspection Machine, Robotic Screw Fitting Machine, Dial Printing and Pad Printing Machines to name a few. We have one of the latest and largest range of Testing Equipment and Standards which act as a backbone to our QA & Calibration System with 8.5 Digit Digital Multimeter as a master standard. Using state - of - the - art electronics circuit designs, firmware, software and mechanical infrastructure along with dedicated, skilled and experienced work force, MECO also acts as an OEM to manufacturers in India, Germany, Italy, UK and USA.

Keeping pace with the requirements of various industry sectors, we have instruments in the following major categories:

- | | |
|---------------------------------------|--|
| ■ Multifunction Meters | ■ Earth / Ground Resistance & Leakage Current Testers |
| ■ Digital Panel Meters & Modules | ■ LCR Meters & Micro / Milli Ohm Meters |
| ■ Power Line Transducers | ■ Automotive Meters & Battery Capacity Testers |
| ■ Analog Panel & Switchboard Meters | ■ Solar Analyzer & Solar Power Meter |
| ■ Digital Multimeters | ■ Infrared Thermometers |
| ■ Digital Clampmeters / Tong Testers | ■ Environment Testing Instruments |
| ■ Digital & Analog Insulation Testers | ■ Power & Harmonic Analyzer & Clamp-On Power Meter |
| ■ Testing & Measuring Instruments | ■ Calibrating Equipment / CT's / Decade Resistance Box |

We have a network of over 75 authorized dealers / distributors and more than 1000 resellers who effectively channel our products in the entire Indian subcontinent with good penetration. Our products are exported to almost all the continents of the world through local agents and representatives.

We seek strategic alliances with companies worldwide, who can either efficiently market our products in their local markets or with companies who wish to channel their products in India through our marketing network.

As part of our CSR initiative we organize eye check-up camps, distribute of baby kits (for the new- born), install water coolers in government hospitals, assistance to blind children and unprivileged, among other welfare activities.

Every member and associate of our organization strongly believes in "**GIVE THE WORLD THE BEST YOU HAVE AND THE BEST IN THE WORLD COMES BACK TO YOU**". We wish for a world where peace, happiness and harmony prevail, allowing everyone to live a healthy and purposeful life.



Late. Parasmal Goliya
(Founder)



Mr. Premchand Goliya
(Chairman & Mg. Director)




Dr. Kamal P. Goliya
(Director & CEO)



1	1	Company Introduction
2	4	Index
5	8	Company Profile

Multifunction Meters



12	12	3 Phase Multifunction Meters - Selection Guide
13	13	3 Phase Multifunction Power & Energy Meter with M.D. - TRMS
14	15	1P & 3P MFM / Transducer with M.D. & T.H.D. - TRMS with RS-485 Port 
16	17	3 Phase Multifunction Power & Energy Meter / Power Line Supervisor - TRMS
18	18	Multifunction Power & Energy Monitor / Power Line Supervisor
19	19	3 Phase VAF / VIF Meter - TRMS
20	20	1 Phase Multifunction Meters - Selection Guide
21	21	POWERGUARD - TRMS
22	23	1 Phase Multifunction Appliance Meter - TRMS with RS-485 Port
24	24	1 Phase Multifunction Meter - TRMS
25	25	1 Phase Multifunction Meter - TRMS with RS-485 Port



Digital Panel Meters & Modules



28	28	3½ Digit AC/DC Digital Ammeter & Voltmeter
29	29	3½ Digit Ammeter / Voltmeter
30	31	4 Digit Programmable Ammeter / Voltmeter - TRMS (Professional Series)
32	33	4 Digit Programmable Ammeter / Voltmeter - TRMS
34	35	4½ & 5 Digit Programmable Ammeter / Voltmeter - TRMS (Professional Series)
36	36	4½ Digit AC/DC Digital Ammeter & Voltmeter
37	37	4½ Digit Programmable Process Indicator
38	38	4 Digit Triple Range Programmable Process Indicator
38	38	4 Digit Triple Range Programmable Process Indicator with IP - 65 Protection 
39	39	4½ Digit Programmable Process Indicator with RS-485 Communication
40	41	4½ & 5 Digit Programmable Ammeter / Voltmeter - TRMS with RS-485 Communication
42	42	3½ and 4½ Digit Double Ammeter / Voltmeter and 4 Digit Double Frequency Meter
43	43	4½ Digit Ammeter / Voltmeter
44	44	3½ Digit Digital Ammeter & Voltmeter
45	45	3 Phase 4 Digit Programmable Ammeter / Voltmeter - TRMS
46	46	3½ Digit Panel Frequency Meter
47	47	4 Digit Frequency Meter / 4 Digit RPM Meter
48	48	4 Digit Digital Power Factor Meter (with Built-In Transducer)
49	49	Digital Wattmeter / Varmeter (with Built-In Transducer)
50	50	Digital Wattmeter / Varmeter (with External Transducer)
51	51	5 Digit 3P Watt / VAR / VA Meter (with Built-In Transducer) - TRMS with RS-485 Communication 
51	51	4 Digit 3P PF Meter (with Built-In Transducer) - TRMS with RS-485 Communication 
52	52	3½ Digit Ammeter / Voltmeter (5V DC Aux. Supply)
53	53	3½ Digit DC Operated Panel Ammeter & Voltmeter
54	54	3½ & 4½ Digit LCD & LED Modules - Professional Series
55	55	3½ Digit LCD & LED Modules
56	56	3½ Digit LCD Modules with Data Hold Facility 
57	57	3½ Digit LED Modules with Data Hold Facility 
58	58	3½ Digit Voltmeter (Mini Series)



Power Line Transducers



60	62	Power Line Transducers - Introduction, Specifications & Selection Guide
63	63	AC Current Transducer
64	64	AC Voltage Transducer
65	65	Frequency Transducer
66	66	DC Isolation Transducer / DC - DC Converter
67	67	Tap Position Transducer
68	68	Active Power [Watt] / Reactive Power [Var] Transducer
69	69	Power Factor Transducer



Analog Panel & Switchboard Meters



72	73	Analog Panel & Switchboard Meters - Introduction
74	74	AC Moving Iron DIN Panel Ammeter / Voltmeter
75	75	DC Moving Coil DIN Panel Ammeter / Voltmeter
76	76	AC Moving Coil Rectifier Type DIN Panel Ammeter / Voltmeter
77	77	Electronic Analog W / VAR / PF / Hz Meters
78	78	Rectangular AC & DC Panel Meter
79	79	Educational Desk Stand Meter / Edge Mounting Rectangular AC & DC Panel Meter
80	80	Analog Panel & Switchboard Meters - Dimension



Digital Multimeters



82	82	3½ Digits 2000 Counts Manual Ranging Digital Multimeters
83	83	3½ Digits 2000 Counts Manual Ranging Digital Multimeter - TRMS / Average
83	83	3½ Digits 6000 Counts Autoranging Digital Multimeter - TRMS
84	84	3¾ Digits 4000 Counts Autoranging Digital Multimeter - TRMS (Pocket Size)
84	84	3½ Digits 6000 Counts Autoranging Digital Multimeter - TRMS (Pocket Size)
85	85	3½ Digits 6000 Counts Autoranging Digital Multimeters - TRMS
86	86	4½ Digits 20000 Counts Auto & Manual Ranging Digital Multimeter - TRMS
86	86	4 Digits 9999 Counts Manual Ranging Digital Multimeter - TRMS
87	87	4 Digits 9999 Counts Auto & Manual Ranging Digital Multimeter - TRMS
87	87	4 Digits 9999 Counts Auto & Manual Ranging Digital LCR Multimeter - TRMS
88	88	3½ Digits 2000 Counts Autoranging Digital Multimeter
88	88	3¾ Digits 4000 Counts Autoranging Digital Multimeter



Digital Clampmeters / Tong Testers



90	90	Autoranging Digital Clampmeters - 600A AC / 1000A AC TRMS
91	91	Autoranging Digital Clampmeters - 600A AC / 1000A AC TRMS
92	92	Manual Ranging Digital Clampmeter - 400A AC TRMS
92	92	Autoranging Digital Clampmeters - 600A AC TRMS
93	93	Manual Ranging & Auto Ranging Digital Clampmeters - 1000A AC TRMS
93	93	Auto / Manual Ranging Digital Clampmeter - 1000A AC TRMS
94	94	Smart Digital Clampmeter - 400A AC
94	94	Manual Ranging Digital Clampmeter - 1000A AC
95	95	Auto / Manual Ranging Digital Clampmeter - 600A DC / AC
95	95	Autoranging Digital Clampmeter - 600A DC / AC TRMS
96	96	Autoranging Digital Clampmeters - 600A DC / AC TRMS
97	97	Autoranging Digital Clampmeter - 1200A DC / 1000A AC TRMS
97	97	Auto / Manual Ranging Digital Clampmeter - 1200A DC / AC TRMS
98	98	Auto / Manual Ranging Digital Clampmeters - 2000A DC / AC TRMS



Insulation Testers



100	100	Insulation Tester - Analog
101	101	Insulation Tester - Digital
102	102	Analog Insulation Testers (Hand Cranking Type)
103	103	1kV - 20GΩ Digital Insulation Tester with P.I., D.A.R., Low Ohms & AC Voltage
104	104	2.5kV - 200GΩ Digital Insulation Tester with P.I., D.A.R., Low Ohms & AC Voltage
105	105	2.5kV - 200GΩ Digital Insulation Tester with P.I., D.A.R., & AC / DC Voltage Functions
106	106	5kV - 200GΩ Digital Insulation Tester (6 Ranges)
107	107	5kV - 200GΩ Digital Insulation Tester with AC Voltage, Phase Sequence & Phase Status Indicator
108	109	5kV - 10TΩ Digital Insulation Resistance Tester with P.I. & D.A.R. Measurement



Testing & Measuring Instruments



112	112	Digital Multi-Range Portable Meter
113	113	Digital Earth Resistance Tester
114	116	Phase Sequence Indicator / LCR Meter / Transformer Turns Ratio Meter
117	117	Micro - Ohmmeter / Milli - Ohmmeter
118	119	Clamp - On Earth / Ground Resistance & Leakage Current Testers
120	120	Leakage Current Testers
121	121	Non - Contact Voltage Detector, Battery / Cell Tester & Inverter Analyzer



Automotive Meters & Battery Capacity Testers



124	124	Digital Battery (Load) Meter
124	124	Motorcycle / Two Wheeler / Electrical System Battery Meter
125	125	Vehicle Battery System Meter / Vehicle Battery System Meter with Printer
126	126	Multifunction Automotive Meter / Digital Automotive Multimeter
128	128	Battery Capacity (IR) Meter
129	129	Battery Capacity (Impedance) Tester for Batteries upto 500Ah
130	131	Battery Capacity (Impedance) Tester with DC Current Adaptor for Batteries upto 1200Ah



Solar Analyzers



134	135	Solar Module Analyzer (Photovoltaic I-V Curve Tester)
136	136	Solar Power Meter



Environment Testing Instruments



138	139	Infrared Thermometers (Body / Industrial)
140	140	Environment Testing Instruments (Mini Series)
141	141	Portable / Desk / Wall Mounting Temp. & RH Meter with Clock and Calendar
141	141	Long Probe Handy Multipurpose Thermometer
142	142	Humidity & Temperature Meter / Lux Meter (Professional Series)
143	143	Anemometer / Sound Meter (Professional Series)
144	144	Tachometer - Contact Type & Non-Contact Type / Coating Thickness Gauge (Professional Series)
145	145	Brake Fluid Tester / Combustible Gas Leak Detector (Professional Series)
146	146	Laser Distance Meter



Power & Harmonics Analyzers



148	150	Power & Harmonics Analyzer
151	151	AC Clamp-On Power & Harmonics Tester
152	153	3Φ / 1Φ Clamp-On TRMS Power Meter
154	154	3Φ / 1Φ Clamp-On TRMS Power Meter for AC / DC Power Measurement



Calibrating Equipment / CT's / Decade Resistance Box



157	157	Universal Calibrator
158	158	Multifunctional Calibrator
159	159	AC Multifunctional Calibrator
160	161	Multifunction Process Calibrators
162	162	Voltage and Current Signal Generator (Pocket Size)
162	163	Current Transformers (Flexible & Clamp-On Type)
164	164	High Voltage Resistance Box



Copyright and Disclaimer

The material presented in this publication is copyright protected ©2025 and 2026 by M/s. MECO Instruments Pvt. Ltd., Navi Mumbai (India) and may not be reproduced in any form, by any method for any purpose without prior written consent of M/s. MECO Instruments Pvt. Ltd., Navi Mumbai (India). Several of our product designs are registered with THE PATENT OFFICE, Government of India as per the provisions of Designs Act and Design Rules by Controller General of Patents, Designs and Trade Marks. In our endeavor to make better products, the specifications are subject to change. Trade Marks, Logos and References used of various organizations are hereby acknowledged. Subject to Navi Mumbai jurisdiction only.

Chairman & Managing Director

Mr. Premchand Goliya

Associated with Professional Bodies / Associations

■ Former President

- IEEMA (Indian Electrical & Electronics Manufacturers Association), Mumbai
- All India Instrument Manufactures & Dealers Association, Mumbai
- AOTS Alumni Association of Western India (AAAWI)

■ Former Chairman

- CII (Instrumentation Division), New Delhi

■ Member

- Instrumentation Experts Club, Mumbai
- Governing Council, Institute for Design of Electrical Measuring Instruments, Mumbai
- Bureau of Indian Standards, Electrical Instruments Sectional Committee, New Delhi
- Engineering Expert Promotion Council, New Delhi

■ Former Member

- R & D Instruments Advisory Council, Ministry of Science & Technology, New Delhi
- Development Council for Instrument Industry, Government of India
- Technology Information Forecasting & Assessment Council, Government of India

■ Honoured with Life Time Achievement Award By

- Instrumentation Expert's Club in 2017
- Electronic Maker in 2017

Directors

Dr. Kamal Premchand Goliya

Director & C.E.O.

- Member of IEEMA's NEC: 2019-2020, 2021-2022, 2022-2023 & 2023-2024
- Member of Organizing Committee for ELECRAMA - 2023 & 2025
- Chairman of IEEMA's MSME Division for 2023-2024 and 2024-2025
- Chairman of Roadshow Committee for ELECRAMA - 2025
- Chairman of Visitor Experience Committee for ELECRAMA - 2023 & 2025
- Member of O.C. for BUILDELEC - 2022
- Co. Chairman for BUILDELEC - 2024
- Member of O.C. for IEEMA's MEP Consultant Meet 2022, 2023 & 2025
- Member of Audit, Finance, Investment and Taxation Committee of IEEMA for 2021-2022, 2022-2023, 2023-2024 and 2024-2025
- Member of IEEMA's Public Policy Committee for 2022-2023 & 2023-2024
- Member of RBSM Committee for ELECRAMA - 2020
- Member of BCCI, COSMA, IEC.
- Member of Association of Overseas Technical Services (AOTS - Japan)
- Member of Mahavir International Trust

Mr. Jhanwarlal Sipani (Administration)

Ms. Nandita Goliya (Personnel & HR)

Ms. Shivani Mehta (Management)

Ms. Suvarna Goliya (Management)

Ms. Yasha Goliya (Management)

Registered Office & Works

EL-1, MIDC Electronic Zone, TTC Industrial Area, Mahape,
Navi Mumbai - 400710, Maharashtra (INDIA)

Tel : +91 - 93233 32435 (Sales)

Email : info@mecoinst.com Web : www.mecoinst.com

Authorised Service Centre Navi Mumbai

Awards and Certifications

Engineering Export Promotion Council
(Government of India)

Awards For Highest Export Of Panel Instruments

1984-85 1994-95 1995-96 1996-97



EFY'S BEST
MULTIMETERS AWARD



BEST CALIBRATING
EQUIPMENT AWARD




AUTOMATION'S BEST PROCESS
INDICATOR MADE IN INDIA AWARD



BEST MULTIMETERS
AWARD



EIL APPROVAL



EEPC AWARD



EEPC APPROVAL



BEST INSULATION
TESTER AWARD



BEST DIGITAL CLAMP
METER AWARD



BEST ELECTRONIC
EARTH RESISTANCE
TESTER AWARD



BEST DIGITAL PANEL
METER AWARD

Government of Maharashtra
Award in Appreciation of Export Achievement
1999-2000

Year of Establishment 1962

Banker

Canara Bank, Vashi Branch, Sector 12, Navi Mumbai-400703
A/C : 0110261020612, IFSC Code : CNRB0003302

MSME Registration (SMALL Enterprise)

UDYAM - MH-33-0032349

Recognised In - House R&D Unit

Recognized by Department of Scientific & Industrial
Research, Ministry of Science & Technology GOI, N.D.
TU/IV-RD/1973/2022 Date 18.05.2022
Renewed till 31.03.2028

Registrations :

ISO 9001 : 2015

- Certificate No. IND 23-7327/QM/U
- Original Approval Date 14.12.2002 - BVQI
- NSIC PMT : NSIC/GP/MUM/2018/63072 Date 16.08.2024
- GST 27AAACM2883Q1ZU

Permanent Income Tax No. (PAN)

AAA CM 2883 Q

Company's Act 14477 Date 15.12.1969

CIN : U33120MH1969PTC014477

Factory Act

Thane -121704520000M-1 Date 01.01.2020 to 31.12.2025

Import Export Code Number 0388036184

Gem Government e Market Place

VA-323168157897169 Date 23.04.2024

Product Profile


- Panel & Switchboard Instruments
- Testing & Measuring Instruments
- Automotive Meters & Battery Testers
- Solar Analyzers
- Environment Testing Instruments
- Power & Harmonic Analyzers
- Calibrating Equipments

Industry Segments

Automobile	Renewables	R & D Organization
Automation	Food & Fertilizer	Railway
Aviation	Hotel & Tourism	Rubber & Plastic
Cement & Steel	Mining & Metallurgy	SCADA
Chemical	Oil / Gas / Petroleum	Sugar & Distilleries
Defence	Paper	System Integrators
Educational & Labs	Pharmaceutical	Telecommunication
EEE Manufacturer	Power Utilities	Textile Plants/Mills

Exports To Over 30 Countries

Bahrain	Germany	Oman	UAE
Denmark	Indonesia	Philippines	UK
Egypt	Israel	Qatar	USA
Ethiopia	Kenya	Saudi Arabia	Many More...
Finland	Kuwait	Singapore	
France	Malaysia	Thailand	

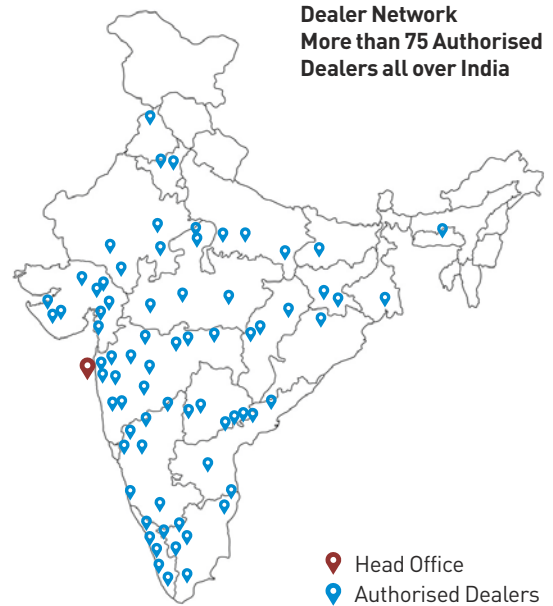

On Approved List of Major Consultants and Customers

ABB	C & S Group	Honeywell	Maruti	Osaw	Tata Power
Airport Authority [AAI]	DMRC	HPCL	Ministry Of Defence	Panasonic	TELCO
Amara Raja Group	ECIL	ICIC Bank	MPEB	Phillips	TISCO
APGENCO	EIL	IIT's	MRPL	PGCIL	TNEB
Areva T & D India Ltd.	EMERSON	IOCL	MSEDCL	Polycab	TOYOTA
Bajaj Auto Limited	GAIL	Indian Ordnance Factory	MSETCL	Popular Switchgear	TUV
BARC	GE	Indian Railways	MTNL	Raychem	TVS
BEST	GERMI	ISRO	NPC	RIL	Venson
Bharti Airtel Ltd.	Godrej	JIO	NALCO	Rockwell	Vikram Sarabhai Space Centre
BHEL	Grasim	JVVNL	NHPC	RRVPL	WIPRO
Blue Star Limited	GSEB	Jyoti	NIT	SAIL	Yokogawa
BPCL	HARTEK GROUP	L & T	Nitya Electro	Stelmec	Many More....
Chloride	HLB	MGL	NTPC	Siemens	
CRED A	Hindalco	Mahindra	ONGC	SUZLON	

Plant and Machinery

JUKI SMT Machine	Ultrasonic Cleaner	Batliboi Shaping Machine
ETA Solder Paste Mixer	Oil Dispenser	Radial Drilling Machine
ETA Solder Paste Printer	In House CAD Facility	Tapping Machines 6.5mm
ETA REFLOW Machine	Dial Designer	Pantograph
JUKI Automated Optical Inspection Machine (AOI)	Belt Conveyor System	Tanabe (Japan) Coil Winding Machines
JANOME Robot with Screw Feeder	Dial Printing Machine	Industrial Ovens
Dehumidifiers	Pad Printing Machine	DC Regulated Power Supply cum Rectifier Unit
Manual Stacker	BFW Miling Machine with 3 axis DRO	Air Compressors with Refrigerated Air Dryer
	Kirloskar Lathe Machine	Box Strapping Machine

Quality Control Facilities

Master Standards

- FLUKE 8588A 8½ Digit Multimeter
- Temperature Calibrator
- DY HTY3 (30°C ~ 45 °C)
- BBTSC 3045 (30°C ~ 45 °C)
- CEM BX 500 (50°C ~ 500°C)
- HP 34401A 6½ Digit Multimeter
- YEW 2885 Watt Converter
- FLUKE 5500A AC / DC Calibrator
- MECO 90DR HV Resistance Box (0.01MΩ - 5GΩ)
- MECO FS 216 Ammeter
- MECO DIT 918 Digital Insulation Tester
- MECO Current Transformer (1000 / 5A)
- MECO Clampmeter Coil (1000A DC with 100 Turns)

- Shunt (50A / 100mV)

- Quick 191A Thermometer

Mechanical (Dimensional) QC

- World class Measuring Instruments with an In - House Tool Room

In House Calibrators

- MECO 90DQ Multifunctional Calibrator
- MECO 90A Universal Calibrator
- MECO 90P AC Multifunction Calibrator
- MECO 333 Process Calibrator
- AMPERE 74T 3 Phase V & I Generator
- MECO 90DR45D High Voltage Resistance Box
- YEW Decade Resistance Box
- MECO 65P 6½ Digit Multimeter

- MECO LCR999A LCR Meter
- ESCORT 3146A 6½ Digit Multimeter

Type Tests

- Vibration Table
- Life Tester
- High Voltage Tester
- Oscilloscopes, DMM etc.
- Environmental Chamber
- Insulation Tester
- Stereo Microscopes 40X, e -Microscope
- Bursting Strength Machine

Product Testing / Certification by Accredited Laboratories

Particulars	Certificate No
Analog Instruments	
Type Test Reports	
■ Moving Iron AC Panel Meter – SQ72 / SQ96.....	ERTL (W)/2002 E & S 294 & ERTL (W)/2002 E & S 295
■ Moving Coil AC Rectifier Type Meter – MLC96.....	ERTL (W)/2002 E & S 290
■ Moving Coil AC Rectifier Type Meter – C72 / C96	ERTL (W)/2002 E & S 288 & ERTL (W)/2002 E & S 287
■ Moving Coil DC Volt Meter – M72 / M96	ERTL (W)/2002 E & S 285 & ERTL (W)/2002 E & S 286
■ Moving Coil Panel Meter – ML96	ERTL (W)/2002 E & S 289
■ Electronic Analog Type Watt Meter - 96QW33	ERTL (W)/2002 E & S 291
■ Electronic Analog Type Frequency Meter - F96	ERTL (W)/2002 E & S 293
■ Electronic Analog Type Power Factor Meter - 96QF31	ERTL (W)/2002 E & S 292
■ Electronic Analog Insulation Tester - MC904A-2 / MC907A-2	ERTL (W)/2004 E & S 284 & ERTL (W)/2004 E & S 285
EMI and EMC Test Reports	
■ Electronic Analog Type Frequency Meter - F72	ERTL (W)/1998 EMI 00088
■ Moving Coil AC Rectifier Type Meter - MLC96	ERTL (W)/1998 EMI 00089
■ Maximum Demand Ammeter - BM96S	ERTL (W)/1998 EMI 00090
Safety Test Reports	
■ Electronic Analog Type Frequency Meter - F72	ERTL (W)/1998 SAF 0046
■ Moving Coil AC Rectifier Type Meter - MLC96	ERTL (W)/1998 SAF 0047
■ Maximum Demand Ammeter - BM96S	ERTL (W)/1998 SAF 0048
■ Moving Coil DC Voltmeter - ML96	TE/ETU022/14-15
Digital Instruments	
Type Test Reports / Calibration Report	
■ Digital Multi-Range AC Portable Voltmeter-PM-VAC-5R	CC/ECL/1814/21-22
■ Digital Multi-Range AC Portable Ammeter – PM-AAC-5R.....	CC/ECL/1816/21-22
■ Digital Multi-Range DC Portable Voltmeter – PM-VDC-5R.....	CC/ECL/1815/21-22
■ Digital Multi-Range DC Portable Ammeter – PM-ADC-5R.....	CC/ECL/1817/21-22
■ Digital AC & DC Volt Meter - SMP35S.....	ERTL (W)/2004 E & S 276 & ERTL (W)/2004 E & S 282
■ Digital AC Current Meter - SMP35SRS.....	ERTL (W)/2004 E & S 277
■ Digital Frequency Meter (5 Digit) FDM5.....	ERTL (W)/2004 E & S 278 & ERTL (W)/2004 E & S 289
■ Digital Power Factor Meter - DPF 31.....	ERTL (W)/2004 E & S 281
■ Digital Watt Meter - DWM9634.....	ERTL (W)/2004 E & S 280
■ Clamp-On TRMS Power Meter - 3510PHW	ERTL (W)/2008 E & S 357
■ AC Digital Tong Tester / Clamp-On TRMS Power Meter - 3510RHW	TR/ETU229/16-17
■ Clamp-On Earth / Ground Resistance & Leakage Current Tester - 4680.....	ERTL (W)/2003 E & S 258 & ERTL (W)/2004 E & S 46
■ AC Digital Clampmeter - 3150+	KLPL/BTG/20/10-88
■ Digital Insulation Tester - DIT99E.....	CC/ECU0603/17-18
■ Digital Insulation Tester - DIT99C.....	ERTL (W)/2004 E & S 286
■ Digital Insulation Tester - DIT99D.....	ERTL (W)/2004 E & S 287
■ Multifunction Calibrator - 90DQ.....	CC/ECU1021/08-09
■ AC Multifunction Calibrator - 90P	CC/EC U979/09-10
■ 4 Digit Frequency Meter	ERTL (W)/2011 E & S 11
EMI and EMC Test Reports	
■ Digital Multi meter - 9A02.....	ERTL (W)/2002 EMI 150
■ Power Line Supervisor / Universal Electrical Analyzer - SVPR- 96.....	ERTL (W)/2002 EMI 147
■ Digital Watt Meter - DWM33.....	ERTL (W)/2002 EMI 148
■ Digital AC Current Meter - SMP35SRS.....	ERTL (W)/2004 EMI 365
■ Clamp-On Earth / Ground Resistance & Leakage Current Tester - 4680	ERTL (W)/2004 EMI 234
■ Clampmeter Standard Coil with Multifunction Calibrator - Current Coil	CC/ECU01414/17-18
Safety Test Reports	
■ Power Line Supervisor / Universal Electrical Analyzer SPVR-96	ERTL (W)2002 SAF 46
Power Line Transducers	
Type Test Reports	
■ AC Current Transducer - CMT	ERTL (W)/2003 E & S 117
■ AC Voltage Transducer - VMT	ERTL (W)/2003 E & S 26
■ Frequency Transducer - FT	ERTL (W)/2003 E & S 27
■ AC Current Transducer (Self Powered) - CMT.....	ERTL (W)/2004 E & S 283
EMI and EMC Test Reports	
■ Active (Watt) Power Transducer - WT34	ERTL (W)/2002 EMI 149
■ AC Voltage Transducer - VMT	ERTL (W)/2003 EMI 262
■ Frequency Transducer - FT	ERTL (W)/2003 EMI 263
■ Current Transducer with 19V to 90V DC Aux. Supply - CMT	ERTL (W)/2003 EMI 324
■ Current Transducer with 85V to 265V AC Aux. Supply - CMT.....	ERTL (W)/2003 EMI 327
■ Voltage Transducer with 19V to 90V DC Aux. Supply - VMT.....	ERTL (W)/2003 EMI 325
■ Voltage Transducer with 85V to 265V AC Aux. Supply - VMT	ERTL (W)/2003 EMI 328
■ Watt Transducer with 19V to 90V DC Aux. Supply - WT11	ERTL (W)/2003 EMI 326
■ Watt Transducer with 85V to 265V AC Aux. Supply - WT11.....	ERTL (W)/2003 EMI 329
■ Current Transducer with Self Powered Aux. Supply - CMT.....	ERTL (W)/2004 EMI 366
■ Current Transducer - CMT.....	ERTL (W)/2004 EMI 346
■ AC Voltage Transducer - VMT	ERTL (W)/2004 EMI 347
■ Frequency Transducer FT	ERTL (W)/2004 EMI 348
■ Power Factor Transducer - PFT31.....	ERTL (W)/2004 EMI 349
■ Active Power Transducer - WT33.....	ERTL (W)/2004 EMI 350
■ Reactive Power Transducer - RPT33.....	ERTL (W)/2004 EMI 351

Echelon of Standards at MECO (Traceable to NPL Standards)

PARAMETERS	RESISTANCE	D.C VOLTS	D.C AMPS	A.C VOLTS	A.C AMPS	WATT	VAR	PF/Ø	Hz	CAPACITANCE	TEMPERATURE
ACCURACY											
0.0004%		• FLUKE 8588A DMM									
0.0009%	• FLUKE 8588A DMM										
0.002%	• HP 34401A DMM	• HP 34401A DMM	• FLUKE 8588A DMM								
0.005%		• MECO 65P DMM • FLUKE 5500A CALIBRATOR									
0.006%											
0.007%				• FLUKE 8588A DMM					• HP 34401A DMM		
0.01%	• YEW 2793 DECADE RESISTANCE BOX • MECO 65P DMM								• AMPERE 7/AT GENERATOR CALIBRATOR • MECO 65P DMM • ESCORT 3146A • MECO 333 CALIBRATOR		
0.015%						• YEW 2885 WATT CONVERTOR			• MECO 90P CALIBRATOR		
0.02%		• MECO 90DQ CALIBRATOR	• MECO 90DQ CALIBRATOR • MECO 333 CALIBRATOR								
0.025%											
0.03%		• MECO 90A CALIBRATOR	• MECO 90A CALIBRATOR	• MECO 90P CALIBRATOR	• MECO 90P CALIBRATOR				• MECO 90P CALIBRATOR		
0.04%											
0.05%		• MECO 333 CALIBRATOR	• MECO 65P DMM • HP 34401A DMM • FLUKE 5500A CALIBRATOR	• MECO 90A CALIBRATOR • MECO 90DQ CALIBRATOR	• MECO 90P CALIBRATOR • FLUKE 8588A DMM						
0.06%											
0.065%										• FLUKE 8588A DMM	
0.08%				• YEW 2558 AC VOLT / AMPS SOURCE	• YEW 2558 AC VOLT / AMPS SOURCE • CURRENT TRANSFORMER (1000 / 5A AC) • FLUKE 5500A CALIBRATOR	• MECO 90P CALIBRATOR					
0.1%				• AMPERE 7/AT GENERATOR CALIBRATOR	• HP 34401A DMM • AMPERE 7/AT GENERATOR CALIBRATOR • MECO 65P DMM	• YEW 2533 POWER METER					
0.15%					• 1000 A AC WITH 100 TURNS CURRENT COIL						
0.2%	• MECO 90A CALIBRATOR • MECO 90DQ CALIBRATOR • HIGH VOLTAGE RESISTANCE BOX	• MECO 90A CALIBRATOR • MECO 90DQ CALIBRATOR • HIGH VOLTAGE RESISTANCE BOX	• MECO 90A CALIBRATOR • MECO 90DQ CALIBRATOR • HIGH VOLTAGE RESISTANCE BOX			• AMPERE 7/AT GENERATOR CALIBRATOR	• AMPERE 7/AT GENERATOR CALIBRATOR				
0.45%									• FLUKE 5500 A CALIBRATOR		
ACC. °C											
0.16° C											• FLUKE 5500 A CALIBRATOR • DY - HT Y3 [50°C - 45°C] • B81SC 3045 [50°C - 45°C]
0.2°C											
0.8°C											• MECO 333 CALIBRATOR • CEM - BX500 [0 - 50°C]
2.8°C											• CEM - BX500 [50°C - 500°C]



ಭಾರತ ಹವಿ ಎಲೆಕ್ಟ್ರಿಕಲ್ಸ್ ಲಿಮಿಟೆಡ್
भारत हेवी इलेक्ट्रिकल्स लिमिटेड
Bharat Heavy Electricals Ltd
(A Government of India Undertaking)
ELECTRONICS DIVISION
P.B. No 2606, MYSORE ROAD, BANGALORE - 560 026. INDIA

PHONE : +918026998443
dhamaraju@bheledn.co.in

As ISO 9001, ISO 14001 & OHSAS 18001 COMPANY

Date : 12th Dec 2012

To Whomsoever It May Concern

This is to certify that M/s Mecco Instruments Pvt Ltd., TTC Industrial Area, Mahape, Navi Mumbai- 400710 is registered with our unit of BHEL vide vendor code: M402467.

The supplier is registered for the supply of following material categories:


- Measuring Instruments such as Voltmeters, Ammeters, Wattmeters, Frequency Meters, PF Meters (Both Analog & Digital), and
- Indicators

Type of Registration: Permanent.

12/12/2012
(BK Dhamaraju)
Dy General Manager (Supplier Devel Cell)

ಭಾರತೀಯ ವಿದ್ಯುತ್ ಕಂಪನಿ ಲಿಮಿಟೆಡ್, ಬೆಂಗಳೂರು
ಭಾರತೀಯ ವಿದ್ಯುತ್ ಕಂಪನಿ ಲಿಮಿಟೆಡ್, ಬೆಂಗಳೂರು
Dhamaraju B.K., Dy GENERAL MANAGER, SERVICES CELL
BHEL-EDN, MYSORE ROAD, BANGALORE - 560 026

Visit us at www.bhel.com, www.bheledn.com



☎ : 079 - 2281 3117 / 2755 6077
FAX : 079 - 2755 2902
✉ : adm@systronicsindia.com
Web : www.systronicsindia.com

Date: 21.01.2023

To,
M/s. Mecco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300

Dear Sir/Madam

Kind Attn : Dr. Kamal Goliya - CEO

Sub Products Appreciation letter for Digital LCD & LED Modules

We thank you for your support extended to us for supply of MECO Digital LCD & LED Modules regularly for our various projects.

We are very much satisfied with the performance of these modules.

The presales and post-sales service and support offered are prompt and timely.

We hope to have good and strong business relationship with you in future as well.

Thanking You,

Your Faithfully,

M/s. Systronics

B. Bharnuke
Authorised Signature

c.c.
Mr. Amol Bharnuke - Marketing Executive
Email : amol.bharnuke@meccoinst.com Mobile No. : 9987466629

Regd. Office / Head Office : B/116 - 129, Supath-II Complex, Near Juna Wadga Bus Terminus, Ashram Road, Ahmedabad-380 013. India • Phone : 91-79-27556077, 27553589 • E-mail : adm@systronicsindia.com
Website : www.systronicsindia.com • CIN U32201 GJ1973 PLCO02437

Manufactures of Electronic Instruments & Scientific Equipments.
Branches : Bengaluru, Bhubaneswar, Chennai, Hyderabad, Kolkata, Mumbai, New Delhi, Patna & Thiruvananthapuram.

भारत सरकार
अन्तरिक्ष विभाग
इसरो उपग्रह केन्द्र
पोस्ट बॉक्स नं. 1795, हवाई सड़क मार्ग
विमानपुरा शक घर, बंगलूरु - 560 017. भारत
दूरभाष :
फैक्स :



Government of India
Department of Space
ISRO Satellite Centre
Post Box. No. 1795, Airport Road, Vimanapura Post
Bangalore - 560 017. India
Telephone :
Fax :
25084024
25205293/64

ISCP-2012-0-24809-0101 LO

17/07/2013

WHOM SO EVER IT MAY CONCERN

This is to certify that "SOLAR MODULE ANALYSER" (SMA) LOW POWER SMA AND HIGH POWER SMA which is procured vide our Purchase Order No. ISCP-2012-0-24809-0101 LO Dated.17.06.2013 from M/s. MECO METERS PVT LTD., MAHAPE for ISRO Satellite Centre, Bangalore, is for our own use. There will not be any commercial transactions involved or re-sale of these items.

These materials are being transported through carriers.

It is requested not to detain enroute, as the item is required very urgently at the destination.

V. Saravanan
V.SARAVANAN
Purchase & Stores Officer



भारतीय अन्तरिक्ष अनुसंधान संगठन

Indian Space Research Organisation



Date: 11.01.2023

To,
M/s. Mecco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300

Dear Sir/Madam

Kind Attn : Dr. Kamal Goliya - CEO

Sub Products Appreciation letter for Digital Panel Meters and Analog Panel Meters.

We thank you for your support extended to us for supply of MECO Digital Panel Meters and Analog Panel Meters regularly for our various projects in India and for many export projects.

We are very much satisfied with the performance of these meters.

The presales and post-sales service and support offered are prompt and timely.

We hope to have good and strong business relationship with you in future as well.

Thanking You,

Your Faithfully,

M/s. Chloride Power Systems & Solutions Ltd.

Surajit Marjan
Surajit Marjan
Head Purchase
Phone: 9591070389

Chloride Power Systems & Solutions Limited (A wholly owned subsidiary of Exide Industries Ltd.)
Works & Address of Communication : Plot No. Y-21, Block EP, Sector - V, Salt Lake Electronics Complex, Kolkata - 700 091, W.B., India
Phone : +91 33 2357-5851/52/53/54, Fax : +91 33 2357-7082, CIN : U31100WB1980PLC032796
E-MAIL : info@chloridepower.co.in Web : www.chloridepowersystems.co.in
Regd. Office : "Exide House", 59E, Chowringhee Road, Kolkata - 700 020



T +91 - 40 - 4946 4332 (IDEA)
F +91 - 40 - 4946 4333
Toll Free 1-800-102-4332 (IDEA)
info@solaridea.com
www.solaridea.com

4th January, 2016

To,
M/s. MECO Meters Pvt. Ltd.
Plot No. EL - 60, MIDC, Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai - 400710 (India)
Tel. No. 022 - 27673300
Fax No. 022 - 27673310

Kind Attention: Mr. Kamal Goliya / Mr. Prashant Thakkar
Subject: Performance of MECO Solar System Analyzer - 9018BT

Dear Sir,

We are pleased to inform you that performance of MECO Solar System Analyzer 9018BT supplied to us is working well and is meeting our expectations.

We are using the MECO Solar System Analyzer for analyzing and improving the efficiency of our Solar Inverters, Solar pumps, and other solar systems. We are also able to assess the PV panel performance and furthermore, we are able to adjust the panels spacing and tilt angle to obtain optimum power from the PV panels.

The analyzer is found to be reliable and we have pleasure in recommending the same to others.

We look forward to having similar kind of service and support from you in the future.



With Best Regards
For M/s. Solar Idea Pvt. Ltd.
R. V. ...
Managing Director

SOLAR IDEA PRIVATE LIMITED, CIN : U40106TG2014PTC094915
Registered Office : Door No. 8-2-277/A/7, Plot No. 126, Road No. 2, Banjara Hills, Hyderabad - 500034, Telangana State, India.

Su. Frey No. 351, Thumkunta (VIII.)
Sh. Meerpet (Mdl.), R.R. Dist.
Hyderabad - 500 078, India.
Phone : +91-8418-335556/247680/1/2
Fax : +91-8418-247683

HBL
HBL Power Systems Ltd.

Date : 06.06.2022

To,
M/s. Mecu Instruments Pvt. Ltd.
EL-1, MIDC Electronic Zone, TTC Industrial Area,
Mahape, Navi Mumbai - 400710

Kind Attn : Mr. Kishorkumar Thakare (Marketing Manager - South India)

Subject : Appreciation Letter

Dear Sir

We thank you for your excellent support extended to us for supply of MECO Digital Panel Meters regularly for our various projects in India and for many export projects.

We are very much satisfied with the performance of these meters.

The presales and post sales service and support offered are prompt and timely.

We hope to have good strong business relationships with you in future as well.

With Best Regards

P.N.V. Lakshmana Rao
Sr. Manager



Regd. Office :
HBL Power Systems Limited
Road No.10, Banjara Hills, Hyderabad - 500 034.
Website : www.hbl.in
CIN : L40109TG1986PLC006745

Panasonic

Panasonic India Pvt. Ltd.
Industrial Plot No. 1,
Village Bld Dastri, Bhujar
Haryana - 124103, India

24 MAY 2022

20 May 2022

To,
M/s. Mecu Instruments Pvt. Ltd.
Plot No. EL - 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai - 400 710 (INDIA)

Subject : Certificate of Appreciation

Dear Shri Premchand Goliya Ji (C.M.D.),

We are using following components: Digital Panel Meters, Analog Panel Meters manufactured by you in our machines since about 7 years. These components have helped our supply chain in increasing local content in our products thereby creating import substitution.

During the use we have found the performance of these products satisfactory. Also the delivery, sales, technical and service support of your team is up to our expectation.

We thank MECO Team for their professional approach and look forward to stronger cooperation in future too.

Thanking You,
For Panasonic India Pvt. Ltd.,

Prashant Yadav
Head - Procurement

Registered Office : 12th Floor, Ambience Tower, Ambience Island, NH-8, Gurgaon-122002, Haryana.
Website : www.panasonic.in Email : contact.plg@in.panasonic.com CIN No. U51395TN2006PTC060554



MAHANAGAR GAS LTD.
(Joint Venture of GAIL, British Gas, U.K. & Govt. of Maharashtra)

30 DEC 2011
City Gate Station,
Opp. Anik Depot,
Sion, Mumbai - 400 022.
Tel. : 2404 5785 • Fax : 2401 0080

Date: December 26, 2011

To,
Mr. Kamal Goliya - C.E.O.
M/s. Mecu Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300 Fax No. 022 - 27673310

Dear Sir,

Sub.: Training, Live Demonstration at MECO - Mahape Work and Performance of MECO Make Power & Harmonics Analyser Model PHA- 5850 - B.

Ref.: Purchase Order No. MGL/C&P/4500001382/10-11/BB Dated 26 June 2011 for Supply of Three Phase Power Quality Analyzer (MECO-Power & Harmonics Analyser, PHA-5850B)

We thank Mr. Haren Shah-Marketing Executive for imparting Satisfactory Training and Demonstration to all our following Engineers who were present at your work on 14th October 2011. Our Engineer team member were also satisfied with the interaction and question / answer session.

Name:	Designation	Name:	Designation
Ms. Dipti Lohchab	Executive	Mr. Manish Gupta	Asst. Manager
Mr. Vinkal Kotangale	Executive	Mr. Mahesh Kolte	Asst. Manager
Mr. Manas Khairi	Asst. Manager	Mr. Ganesh Patil	Asst. Manager
Mr. Vaibhav Pagnis	Asst. Manager	Mr. Pramod Kamble	Asst. Manager
Mr. Bhushan Kamble	Asst. Manager	Mr. Suhas Mandh	Sr. Asst.
Mr. Abhinav Nigam	Asst. Manager	Mr. Mahesh Kolte	Sr. Asst.
Mr. Manish Gupta	Asst. Manager		

We are pleased to inform you that MECO Make Power & Harmonics Analyser Model PHA- 5850B Kit supplied to us against above purchase order is working satisfactory. Purpose of purchasing the same instruments gives us satisfactory results as per our requirements and application.

We look forward in future to have similar technical support as and when require.

Thanking You,
For Mahanagar Gas Limited.

Pratap Ayrekar
Manager - O & M

Regd. Office : MGL House, Block No. G - 33, Bandra Kurla Complex, Opp. ICICI Tower, Bandra (E), Mumbai - 400 051. Tel. : 6678 500



Multifunction Meters

- ✓ 3 Phase VAF / VIF Meter – TRMS
- ✓ 3 Phase Multifunction Power & Energy Meter / Powerline Supervisor
- ✓ 1 Phase & 3 Phase Multifunction Power & Energy Meter / Transducer
- ✓ 1 Phase Multifunction Meters – TRMS
- ✓ 1 Phase Multifunction Appliance Meter – TRMS With RS-485 Port
- ✓ Power Guard – TRMS



+60 YEARS
ONE MISSION



Reliable




Long-Lasting



Affordable

FEATURES / PARAMETERS		MFM-96AFN	MFT-96AFN DIN RAIL	MFM-96AF	MFM-96S	SPVR-96S	MFM Din Rail	MFM-96U/ MFM-96UMT	SPVR-96U/ SPVR-96UMT
TRMS Measurement		✓	✓	✓	✓	✓	✓	✓	✓
Display	LED- Super Bright	✓	✓	✓	✓	-	-	✓	-
	LCD- With Backlight	-	-	-	-	✓	✓	-	✓
Communication	RS 485 MODBUS, 4KV Isolated Port	✓	✓	✓	✓	✓	✓	✓	✓
System	1 Phase 2 Wire System	✓	✓	-	-	-	-	-	-
	3 Phase 3 Wire System	✓	✓	✓	✓	✓	✓	✓	✓
	3 Phase 4 Wire System (Balanced / Unbalanced)	✓	✓	✓	✓	✓	✓	✓	✓
Aux. Supply	85-265V AC / DC (Standard)	✓	✓	✓	✓	✓	-	230V AC $\pm 20\%$ or 110V AC $\pm 20\%$	
	19 - 90V AC / DC (Optional)	✓	✓	✓	✓	✓	✓		
Current	I1, I2, I3, I Average	✓	✓	✓	✓	✓	✓	✓	✓
	I12, I31, I Average	✓	✓	✓	✓	✓	✓	✓	✓
	Neutral Current	✓	✓	✓	-	-	-	-	-
Voltage	V1N, V2N, V3N, V Average	✓	✓	✓	✓	✓	✓	✓	✓
	V12, V23, V31, V Average	✓	✓	✓	-	✓	✓	-	-
	V12, V31, V Average	✓	✓	✓	✓	✓	✓	-	-
Frequency	Hz	✓	✓	✓	✓	✓	✓	✓	✓
Active Power	W1, W2, W3, W System	✓	✓	✓	✓	✓	✓	✓	✓
Reactive Power	Var1, Var2, Var3, Var System	✓	✓	✓	✓	✓	✓	✓	✓
Apparent Power	VA1, VA2, VA3, VA System	✓	✓	✓	✓	✓	✓	✓	✓
Power Factor	PF1, PF2, PF3, PF System	✓	✓	✓	✓	✓	✓	✓	✓
Active Energy	KWh1, KWh2, KWh3, KWh Total (Import)	✓	✓	✓	✓	✓	✓	✓	✓
	KWh1, KWh2, KWh3, KWh Total (Export)	✓	✓	✓	✓	✓	✓	✓	✓
Reactive Energy	KVARh1, KVARh2, KVARh3, KVARh Total (Ind.)	✓	✓	✓	✓	✓	✓	✓	✓
	KVARh1, KVARh2, KVARh3, KVARh Total (Cap.)	✓	✓	✓	✓	✓	✓	✓	✓
Apparent Energy	KVAh1, KVAh2, KVAh3, KVAh Total	✓	✓	✓	✓	✓	✓	✓	✓
Previous Energy	Active (Import / Export)	✓	✓	✓	-	-	-	-	-
	Reactive (Ind. / Cap.)	✓	✓	✓	-	-	-	-	-
	Apparent	✓	✓	✓	-	-	-	-	-
Energy Retention & Reset		✓	✓	✓	✓	✓	✓	✓	✓
MAX. Demand	KW System / KVA System	✓	✓	✓	-	-	-	MFM96S UMT	SPVR96S UMT
THD	V1, V2, V3, I1, I2, I3	✓	✓	-	-	-	-	-	-
Scroll - Auto / Manual		✓	✓	✓	✓	✓	✓	MFM96S UMT	SPVR96S UMT
Password Protection		✓	✓	✓	✓	✓	✓	MFM96S UMT	SPVR96S UMT
CT / PT Primary & Secondary Programmable		✓	✓	-	-	-	-	-	-
Baud Rate	2.4 - 19.2 kbps (Selectable)	✓	✓	-	-	-	-	-	-
	9.6 kbps (Standard)	✓	✓	✓	✓	✓	✓	✓	✓
Inbuilt Memory to Programme, Store And Reset For	CTR	-	-	✓	✓	✓	✓	✓	✓
	PTR	-	-	✓	✓	✓	✓	✓	✓
	Instrument Address	✓	✓	✓	✓	✓	✓	✓	✓
	MD Period	✓	✓	✓	-	-	-	MFM96S UMT	SPVR96S UMT
	Password	✓	✓	✓	✓	✓	✓	MFM96S UMT	SPVR96S UMT
Phase Angle	R, Y, B	✓	✓	✓	-	-	-	-	-
Phasor Angle	RY, YB, BR	✓	✓	✓	-	-	-	-	-
RUN Hour	Import	✓	✓	✓	-	-	-	-	-
	Export	✓	✓	✓	-	-	-	-	-
	Total (Import + Export)	✓	✓	✓	-	-	-	-	-
ON Hours		✓	✓	✓	-	-	-	-	-
Voltage	Min. Value, Max Value	✓	✓	✓	-	-	-	-	-
Current	Min. Value, Max Value	✓	✓	✓	-	-	-	-	-

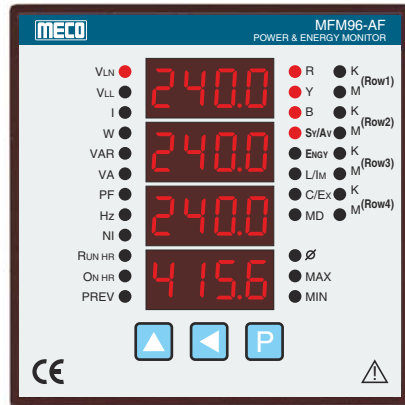

MFM-96AF

Features

- TRMS Measurement
- 23 Parameters on 46 Pages
- 4 Rows of 4 Digit Super Bright RED LED Display
- 3 Phase 3 Wire / 3 Phase 4 Wire System (User Selectable)
- Programable CTR, PTR, Instrument Address, Password & MD Period
- Energy Import-Export (4 Quadrant Operation)
- POWER MASTER Software (Optional)
- RS485 Port, 4KV Isolated with MODBUS RTU Protocol (Optional)
- CE Compliance with EN61010-1, EN61326-1
- Inbuilt Memory to Store CTR, PTR, Instrument Address, Password & MD period
- Auto Scroll (5 sec.) / Manual Scroll Display
- Built in 20 Energy Meters of 8 Digit Resolution
- Energy Retention & Password Protected Energy Reset Facility
- Max. Demand for KW or KVA with user Selectable Demand Interval 5-30 Minutes
- Password for Protection of Programmable Parameters
- RUN Hours, ON Hours
- Phase Angle & Phasor Angle Measurement
- Display Previous Energies
- Set Date & Time
- Measurement of Min. & Max. Voltage & Current Values



Parameters Measured	Accuracy \pm (FS +5Digit)		Phase	System
	Standard	Optional		
Voltage	$\pm 0.5\%$	$\pm 0.2\%$	V1N, V2N, V3N, V12, V23, V31	V (System)
Current	$\pm 0.5\%$	$\pm 0.2\%$	I1, I2, I3, NI	I (Average)
Active Power	$\pm 1\%$	$\pm 0.5\%$	W1, W2, W3	W (System)
Reactive Power	$\pm 1\%$	$\pm 0.5\%$	Var1, Var2, Var3	Var (System)
Apparent Power	$\pm 1\%$	$\pm 0.5\%$	VA1, VA2, VA3	VA (System)
Maximum Demand	$\pm 0.5\%$		W1, W2, W3, VA1, VA2, VA3	W (System), VA (System)
Frequency	± 0.2 Hz		NA	Hz (System)
Power Factor	$\pm 1^\circ$ Electrical		PF1, PF2, PF3	PF (System)
Active Energy	Class 1		KWh1, KWh2, KWh3	KWh Total (Imp.), KWh Total (Exp.)
Reactive Energy			KVarh1, KVarh2, KVarh3	KVarh Total (Ind.), KVarh Total (Cap.)
Apparent Energy			KVAh1, KVAh2, KVAh3	KVAh Total
Phase Angle	NA		V1V2, V1V3, V1I1, V2I2, V3I3	NA

Specifications

Display	Simultaneous Display of 4 Parameters, 4 Digits Resolution, 0.36" / 9.2mm Digit Height		Current Input	<0.2VA / Phase
			System	3P2E3W / 3P3E4W
			Standard	
Auxiliary Supply	85 - 265V AC / DC, Optional : 19 - 90V AC / DC		Installation Category	Cat II (IEC / EN61010-1)
Input			Pollution	Degree 2 (IEC / EN61010-1)
Voltage/Phase	51 - 300VAC (Max.) PH-N	Any one	Environment	
	17 - 138VAC (Max.) PH-N		Calibration	27°C ± 5°C
	88 - 519VAC (Max.) PH-PH	Any one	Operating	0 to 50°C, RH < 70%
	30 - 239VAC (Max.) PH-PH		Storage	-10 to 60°C, RH < 70%
Current/Phase	0.050A to 1.2A (Max.)	Any one	Terminal Block	Plug in type
	0.250A to 6A (Max.)		Dimensions (mm)	
Frequency	45 - 65 Hz		Front	96 x 96mm
Power Factor	0.300 Lag (L) - 1.000 - 0.300 Lead (C)		Depth (Behind Bezel)	90mm
VA Burden (Typical)			Panel Cut-Out	92 ^[+0.8, -0.0] x 92 ^[+0.8, -0.0]
Auxiliary	<2.5VA		Dielectric Strength	2.5kV at 50Hz for 1 min.
Voltage Input	<0.3VA / Phase		Insulation Resistance	>20MOhms at 500V DC


Ordering Information : Model, Input Voltage, Input Current, Input Frequency, Accuracy (Standard / Optional) and RS485 MODBUS Communication (Optional)

Terminal Connection

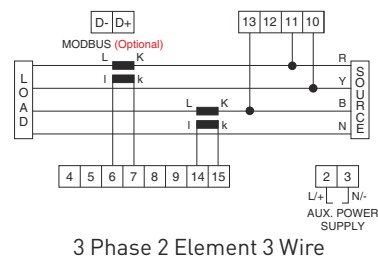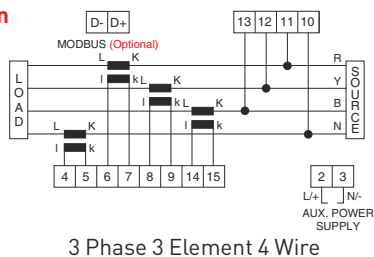




MFM-96AFN

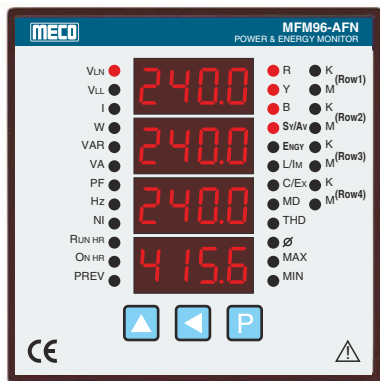

MFT-96AFN DIN RAIL

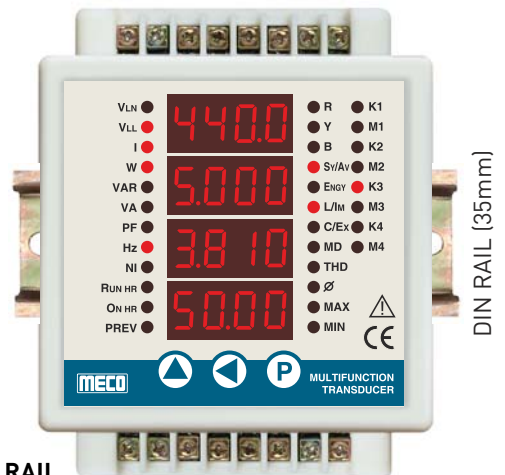

Features

- TRMS Measurement
- 23 Parameters on 46 Pages
- 4 Rows of 4 Digit Super Bright RED LED Display
- 1 Phase 2 Wire / 3 Phase 3 Wire / 3 Phase 4 Wire System (User Programmable)
- CT/PT Primary & Secondary Programmable
- Programmable CT, PT, Instrument Address, Password & MD Period
- Inbuilt Memory to Store CT, PT, Instrument Address, Password & MD period
- Display Digit Height 0.36" / 9.2mm
- Energy Import-Export (4 Quadrant Operation)
- RS485 Port, 4KV Isolated with MODBUS RTU Protocol (Optional)
- CE Compliance with EN61010-1, EN61326-1
- Baud Rate (2.4-19.2kbps)
- Auto Scroll (5 sec.) / Manual Scroll Display
- Built in 20 Energy Meters of 8 Digit Resolution
- Energy Retention & Password Protected Energy Reset Facility
- Max. Demand for KW and KVA with user Selectable Demand Interval 1-30 Minutes
- THD for Voltage & Current (1 to 63rd Order)
- Password for Protection of Programmable Parameters
- RUN Hours, ON Hours (9999 9999 9999 :59:59)
- Phase Angle & Phasor Angle Measurement
- Display Previous Energies
- Set Date & Time
- Measurement of Min. & Max. Voltage & Current Values
- Sleep Mode for the Display

Specifications

Parameters Measured	Accuracy \pm (FS +5Digit)	Phase	System
Voltage	0.2%	V1N, V2N, V3N, V12, V23, V31	V (System)
Current		I1, I2, I3, NI	I (Average)
Active Power	0.5%	W1, W2, W3	W (System)
Reactive Power		Var1, Var2, Var3	Var (System)
Apparent Power		VA1, VA2, VA3	VA (System)
Maximum Demand	0.5%	NA	W (System), VA (System)
Harmonic Distortion (1-63) THD (upto 63 rd Order)	5%	RVH1-63, YVH1-63, BVH1-63 RIH1-63, YIH1-63, BIH1-63	THD - V, THD - I
Frequency	± 0.2 Hz	NA	Hz (System)
Power Factor	$\pm 1^\circ$ Electrical	PF1, PF2, PF3	PF (System)
Active Energy	0.5%	KWh1, KWh2, KWh3	KWh Total (Import), KWh Total (Export)
Reactive Energy		KVarh1, KVarh2, KVarh3	KVarh Total (Ind.), KVarh Total (Cap.)
Apparent Energy		KVAh1, KVAh2, KVAh3	KVAh Total
Phase Angle	NA	V1V2, V1V3, V1I1, V2I2, V3I3	NA


Specifications

Display	Simultaneous Display of 4 Parameters, 4 Digits Resolution, 0.36" / 9.2mm Digit Height		System	1P1E2W / 3P2E3W / 3P3E4W	
			Standard		
Auxiliary Supply	85 - 265V AC / DC @ 50/60Hz (Standard)		Installation Category	Cat II (IEC / EN61010-1)	
	19 - 90V AC / DC @ 50/60Hz (Optional)		Pollution	Degree 2 (IEC / EN61010-1)	
Input			Environment		
Voltage / Phase	26 - 520VAC (Max.) PH-PH	Programmable	Calibration	27°C ± 5°C	
	15 - 300VAC (Max.) PH-N		Operating	0 to 50°C, RH < 70%	
Current / Phase	0.100A - 1.2A (Max.) for 1A AC		Storage	-10 to 60°C, RH < 70%	
	0.100A - 6.0A (Max.) for 5A AC		Terminal Block	1) Plug in type for Flush Mounting 2) Screw type for DIN RAIL Mounting	
Frequency	40 - 70 Hz		Dimensions (mm)	Panel Mount	DIN Rail
Power Factor	0.300 Lag (L) - 1 .000 - 0.300 Lead (C)		Front	96 x 96mm	96 x 120mm
VA Burden (Typical)			Depth (Behind Bezel)	90mm	93mm
Auxiliary	<2.5VA		Panel Cut-Out / Mounting	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)	35mm DIN Rail
Voltage Input	<1VA / Phase		Dielectric Strength	2.5kV at 50Hz for 1min.	
Current Input	<1VA / Phase		Insulation Resistance	>20MOhms at 500V DC	

Ordering Information : Model, Input Voltage, Input Current, Input Frequency, Auxiliary Supply and RS485 MODBUS Communication (Optional)


Terminal Connection

MFT-96AFN DIN RAIL




1 Phase 1 Element 2 Wire


MFM-96AFN

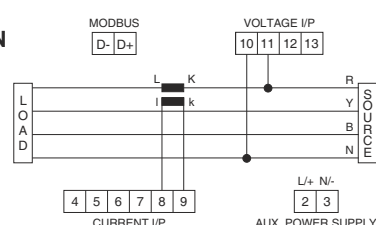


1 Phase 1 Element 2 Wire




3 Phase 2 Element 3 Wire

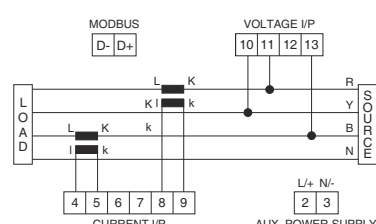


3 Phase 2 Element 3 Wire




3 Phase 3 Element 4 Wire

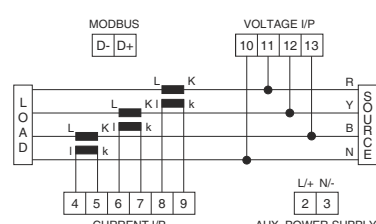


3 Phase 3 Element 4 Wire

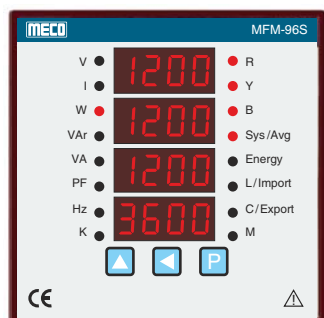

MFM-96S



SPVR-96S

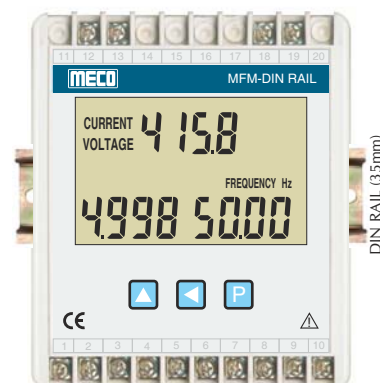

MFM-DIN RAIL

10 Parameters, 48 Values on 16 Pages (MFM-96S)
10 Parameters, 50 Values on 34 Pages (Others)
TRMS Measurement
3 Phase 3 Wire / 3 Phase 4 Wire (User Selectable)
Auto / Manual Scroll Display (Programmable)
POWER MASTER Software (Optional)


RS485 Port, 4KV Isolated with MODBUS RTU Protocol (Optional)
CE Compliance as per EN61010-1, EN61326-1
Inbuilt Memory to Store CTR, PTR, Inst. Address & Password
CTR, PTR, Inst. Address, Password & Energy Reset (Programmable)
Energy Import - Export (4 Quadrant Operation) & Energy Retention
Energy Reset & Programmable Parameters (Password Protected)

	± (FS +5 Digit)			
	± 0.5%	± 0.2%	V1N, V2N, V3N, V12, V23, V31	V (System)
	± 0.5%	± 0.2%	I1, I2, I3	I (Average)
	± 1.0%	± 0.5%	W1, W2, W3	W (System)
	± 1.0%	± 0.5%	Var1, Var2, Var3	Var (System)
	± 1.0%	± 0.5%	VA1, VA2, VA3	VA (System)
	± 0.2 Hz	± 0.2 Hz	NA	Hz (System)
	± 1° Electrical		PF1, PF2, PF3	PF (System)
	Class 1		KWh1, KWh2, KWh3	Kwh Total (Import) & Kwh Total (Export)
			KVarh1, KVarh2, KVarh3	KVarh Total (IND.) & KVarh Total (CAP.)
			KVAh1, KVAh2, KVAh3	KVAh Total



	85 - 265VAC / DC (Standard)		< 0.2 VA / Phase
	19 - 90VAC / DC (Optional)		3P2E3W / 3P3E4W (User Selectable)
	51 - 300VAC (Max.) (PH-N)	Any one	
	16 - 138VAC (Max.) (PH-N)		
	88 - 519VAC (Max.) (PH-PH)	Any one	CAT II (IEC / EN61010 - 1)
	28 - 239VAC (Max.) (PH-PH)		Degree 2 (IEC / EN61010 - 1)
	0.03A to 1.2A (Max.)	Any one	
	0.110A to 6A (Max.)		27°C ±5°C
	45 - 55Hz		0 to 50°C , RH < 70%
	0.300 Lag (L) - 1.000 - 0.300 Lead (C)		-10 to 60°C , RH < 70%
			Screw Type
	< 3 VA		2.5KV at 50 Hz for 1 min.
	< 0.3 VA / Phase		> 20 MOhms at 500VDC

	96 x 96	115 (L) x 96(W) x 60(D)
	43	
	92 ^(+0.8,-0.0) x 92 ^(+0.8,-0.0)	
	DIN Black ABS, Dimension as per DIN 43700	ABS Gray
	Panel	DIN RAIL (35mm)
	Sturdy, Moulded Derlin with Suitable Hardware	
	Terminal Block : Thermo Plastic (UL94V-0) with Tin Plated Brass Terminal	


Terminal Connection

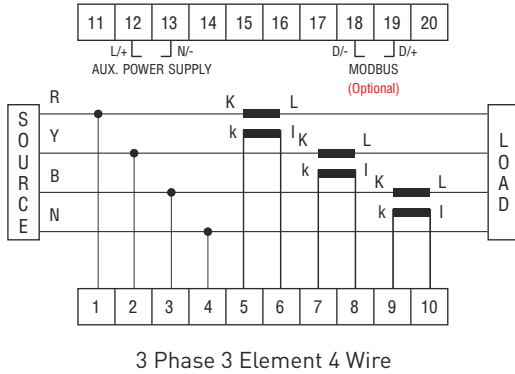


**MFM-965
SPVR-965**

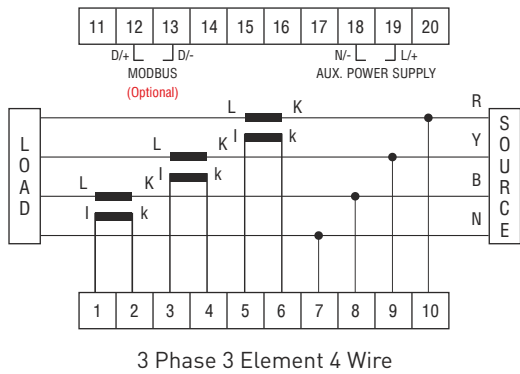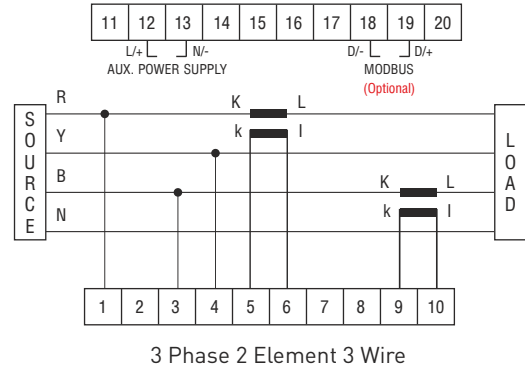

MFM-DIN RAIL

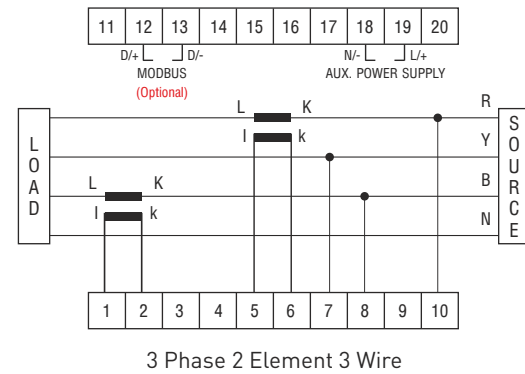

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, Accuracy (Standard / Optional), System 3P3E4W / 3P2E3W, CTR / PTR (if any), Auxiliary Supply & RS485 MODBUS Communication Port (Optional)

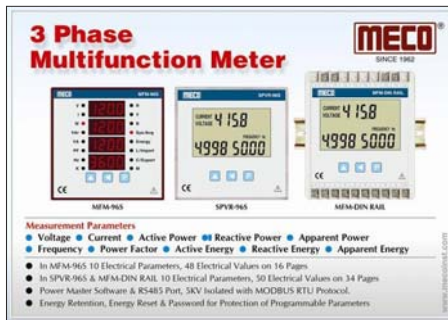

Device A : Real Time Value

Meter Address: 1 Meter Serial Number: 11111 Meter Name: Device A

Real Time View Meter Address

PARAMETERS	A_PHASE	B_PHASE	C_PHASE	SYSTEM
Voltage (V)	240.025	240.000	240.000	198.437
Current (A)	2.998	0.000	0.000	0.399
Active Power (W)	0.719	0.000	0.000	0.719
Reactive Power (Var)	0.000	0.000	0.000	0.000
Apparent Power (VA)	0.719	0.000	0.000	0.719
Power Factor	1.000	0.000	0.000	1.000
Active Energy (Wh)	0.045	0.034	0.036	0.117
Export Active Energy (Wh)	0.000	0.000	0.000	0.000
Reactive Energy (Varh)	0.000	0.000	0.000	0.000
Cap. Reactive Energy (Varh)	0.003	0.003	0.003	0.009
Apparent Energy (Vah)	0.046	0.038	0.038	0.123


Frequency (Hz) = 49.960

Last updated Date: 16-Jun-2018 18:12:18

COM PORT - COM 1
COM PORT Setting - 9600,B,1

POWER MASTER SOFTWARE

REAL TIME DISPLAY

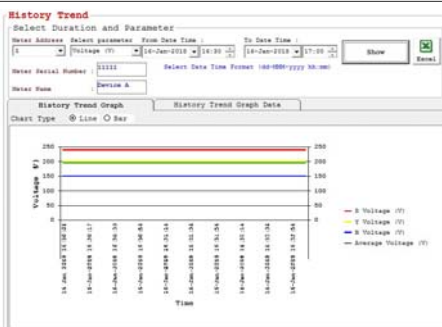

HISTORY TREND

Report View

Select Date Range


From Date Time: 14-Jun-2018 14:00:00 To Date Time: 14-Jun-2018 14:00:00

Parameter: Voltage (V)


View Report

SYSTEM TIME	A Voltage (V)	B Voltage (V)	C Voltage (V)
14-Jun-2018 14:00:00	240.025	240.000	240.000
14-Jun-2018 14:00:01	240.025	240.000	240.000
14-Jun-2018 14:00:02	240.025	240.000	240.000
14-Jun-2018 14:00:03	240.025	240.000	240.000
14-Jun-2018 14:00:04	240.025	240.000	240.000
14-Jun-2018 14:00:05	240.025	240.000	240.000
14-Jun-2018 14:00:06	240.025	240.000	240.000
14-Jun-2018 14:00:07	240.025	240.000	240.000
14-Jun-2018 14:00:08	240.025	240.000	240.000
14-Jun-2018 14:00:09	240.025	240.000	240.000
14-Jun-2018 14:00:10	240.025	240.000	240.000
14-Jun-2018 14:00:11	240.025	240.000	240.000
14-Jun-2018 14:00:12	240.025	240.000	240.000
14-Jun-2018 14:00:13	240.025	240.000	240.000
14-Jun-2018 14:00:14	240.025	240.000	240.000
14-Jun-2018 14:00:15	240.025	240.000	240.000
14-Jun-2018 14:00:16	240.025	240.000	240.000
14-Jun-2018 14:00:17	240.025	240.000	240.000
14-Jun-2018 14:00:18	240.025	240.000	240.000
14-Jun-2018 14:00:19	240.025	240.000	240.000
14-Jun-2018 14:00:20	240.025	240.000	240.000

REPORT VIEW DISPLAY



MFM-96U

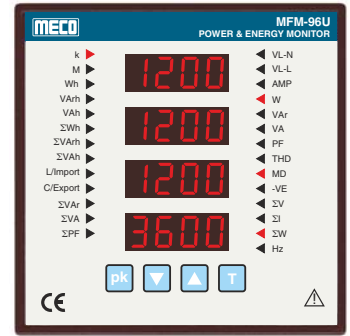

MFM-96UMT


- TRMS Measurement
- More than 65 Electrical Parameters on 20 display pages
- 4 Rows of 4 Digit Super Bright Red LED Display
- 3 Phase 3 Wire / 3 Phase 4 Wire (User Selectable)
- Programmable CTR, PTR & Instrument Address
- 8 digits Resolution for Energy
- Energy Import-Export (4 Quadrant Operation)
- IP54 (for meter front)
- POWER MASTER Software
- MODBUS RTU Protocol

- RS 485 Port, 4kV Isolated (Optional for MFM-96U, Standard for MFM-96UMT)
- CE Compliance with EN61010-1, EN61326-1
- Inbuilt Microcontroller Memory to store CTR, PTR & Instrument Address
- Max. Demand for KW & KVA with User Selectable Demand Interval (1 - 9999 min. for MFM-96UMT)
- THD for Voltage & Current (for MFM-96UMT)
- Password for Protection of Programmable Parameters (MFM-96UMT)
- Auto Scroll (5 sec.) / Manual Scroll Display (for MFM-96UMT)

	± (FS +5Digit)		
Voltage	± 0.5%	V1N, V2N, V3N, V12, V23, V31	V (System)
Current		I1, I2, I3	I (System)
Active Power	± 0.5%	W1, W2, W3	W (System)
Reactive Power	± 1%	Var1, Var2, Var3	Var (System)
Apparent Power	± 0.5%	VA1, VA2, VA3	VA (System)
Frequency	± 0.2 Hz	-	Hz (System)
Power Factor	1 ⁰ Electrical	PF1, PF2, PF3	PF (System)
Active Energy	± 1%	KWh1, KWh2, KWh3	KWh Total (Imp), KWh Total (Exp)
Reactive Energy	± 1%	KVarh1, KVarh2, KVarh3	KVarh Total (Ind.), KVarh Total (Cap.)
Apparent Energy	± 1%	KVAh1, KVAh2, KVAh3	KVAh Total


	Simultaneous Display of 4 Parameters, 4 Digits Resolution, 0.36" / 9.2mm Digit Height		3P2E3W / 3P3E4W (user selectable)
(any one only)	230V AC ±20% @50Hz (Standard) 110V AC ±20% @50Hz (Optional)	Installation Category	Cat II (IEC / EN61010-1)
		Pollution	Degree 2 (IEC / EN61010-1)
		Calibration	27°C ± 5°C
Voltage/Phase	50 - 300V (max.) (Phase to Neutral)	Operating	0 to 50°C, RH < 70%
Current/Phase	0.2A to 1.2 A (max.) or 1A to 6A (max.) (any one only)	Storage	-10 to 60°C, RH < 70%
Frequency	45-55 Hz	Terminals	Plug in type
Power Factor	0.300 Lag (L) - 1.000 - 0.300 Lead (C)		
		Front	96 x 96mm
		Depth (Behind Bezel)	90mm
Auxiliary	<5VA	Panel Cut-Out	92 ^(+0.8, 0.0) x 92 ^(+0.8, 0.0)
Voltage Input	<0.1VA / Phase	Dielectric Strength	2.5kV at 50Hz for 1 min.
Current Input	<0.5VA / Phase	Insulation Resistance	>20MOhms at 500V DC

Model, Input Voltage, Input Current, Input Frequency, System (3P2E3W or 3P3E4W), CTR / PTR (if any), RS485 MODBUS Communication (Optional) & Auxiliary Supply (Standard / Optional)

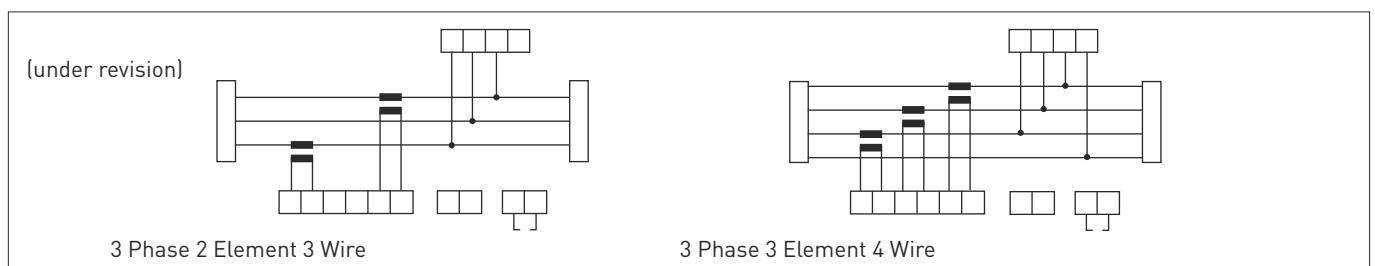



VIF96U

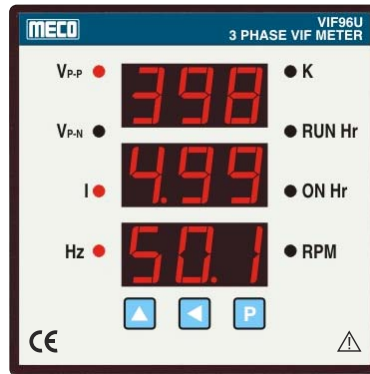

Features

- TRMS Measurement
- Measures V, A, Hz, Run Hour, ON Hour & RPM
- RUN Hour / ON Hour (Max. 99999 Hours, 59 Minutes, 59 Second)
- RUN Hour / ON Hour Reset Facility
- Auto Scroll / Manual Scroll Display
- 3 Phase 4 wire
- 3 Rows of 3 Digits Super Bright Red LED Display
- Programmable CTR, PTR, Number of Pole Setting
- Auto Indication for 'KV' & 'KA'
- Auto Selection of Decimal Point


Parameters Measured	Accuracy \pm [%FS]	Phase	System
Voltage	$\pm 0.5\%$	VRN, VYN, VBN, VRY, VYB, VBR	V (System)
Current	$\pm 0.5\%$	IR, IY, IB	I (Average)
Frequency	± 0.2 Hz	NA	Hz (System)
RPM	$\pm 0.5\%$	NA	RPM (System)
RUN Hour	NA	NA	RUN Hour (System)
ON Hour	NA	NA	ON Hour (System)

Specifications

Display	3 Rows of 3 Digit RED Seven Segment Display 0.56" / 14.2mm Digit Height		Voltage Input	< 0.2 VA / Phase
			Current Input	< 0.2 VA / Phase
Auxiliary Supply	85 - 265 V AC/DC (SMPS)		System	3 Phase 3 Element 4Wire
	19 - 90 V AC/DC (SMPS) (Optional)		Standard	
Input Voltage	51 - 300 V AC (Max.) (PH - N)	Any one	Installation Category	Cat II (IEC / EN61010 - 1)
	21 - 150 V AC (Max.) (PH - N)		Pollution	Degree 2 (IEC / EN61010 - 1)
	88 - 519 V AC (Max.) (PH - PH)	Any one	Environment	
	36 - 258 V AC (Max.) (PH - PH)		Calibration	27°C \pm 5°C
Input Current	0.25 A to 6 A (Max.) For 5A Meter	Any one	Operating	0 to 50°C, RH < 70%
	0.05 A to 1.2 A (Max.) For 1A Meter		Storage	-10 to 60°C, RH < 70%
Frequency	45 - 55 Hz		Dimensions (mm)	
RPM	As per Number of Pole Setting. Fully Programmable (1 - 255)		Front	96 x 96 mm
VA Burden (Typical)			Depth (Behind Bezel)	43 mm
Auxiliary	< 2.5 VA		Panel Cutout	92 [+0.8, - 0.0] x 92 [+0.8, - 0.0]
			Dielectric Strength	2.5 KV at 50 Hz for 1 min
			Insulation Resistance	> 20 MOhms at 500 V DC

Ordering Information : Model, Input Voltage, Input Current, Input Frequency, System 3P3E4W & Auxiliary Supply

Terminal Connection

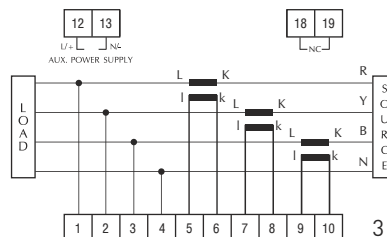

3 Phase 3 Element 4 Wire

FEATURES / PARAMETERS		EM-08S (1A/5A AC)	EM-09 (1A/5A/ 20A AC)	EM-08/ EM-08D (1A/5A AC)	PG-09 (1A/5A/ 20A AC)
TRMS MEASUREMENT		✓	✓	✓	✓
DISPLAY	LCD (With Backlight)	✓	✓	✓	✓
COMMUNICATION	RS 485 MODBUS, 4KV Isolated Port	✓ (Optional)	✓ (Optional)	-	-
SYSTEM	1 Phase	✓	✓	✓	✓
AUX. SUPPLY	230V AC	-	-	✓	✓
	SMPS (85-265V AC/DC)	✓	✓	-	-
CURRENT	I	✓	✓	✓	✓
VOLTAGE	V (P-N)	✓	✓	✓	✓
FREQUENCY	Hz	✓	✓	✓	✓
ACTIVE POWER	W / KW	✓	✓	✓	✓
REACTIVE POWER	Var / KVar	✓	✓	✓	✓
APPARENT POWER	VA / KVA	✓	✓	✓	✓
POWER FACTOR	PF	✓	✓	✓	✓
ACTIVE ENERGY	KWh (Import)	✓	✓	✓	✓
REACTIVE ENERGY	KVARh (Ind)	✓	✓	✓	-
APPARENT ENERGY	KVAh	✓	✓	✓	-
CO ₂	KG	-	-	-	✓
TUT	HOUR / MIN	-	-	-	✓
MONEY	CU	-	-	-	-
TARIFF	CU / KWh	-	-	-	-
TIMER & RELAY	-	-	-	-	-
ENERGY RETENTION & RESET		✓	✓	✓	✓
AUTO SCROLLING		✓	✓	✓	-
MANUAL SCROLLING		✓	✓	✓	✓
INBUILT MEMORY TO PROGRAM, STORE AND RESET FOR	CTR	✓	-	✓	-
	INSTRUMENT ADDRESS	✓	✓	-	-




MECO supports
Bureau
of Energy Efficiency
(BEE), Govt. of
India's mission
to institutionalize
certification of
Electric / Electronic
goods for ECOMARK
under
Gazette of India

PG09 - 20A
PG09 - 5A
PG09 - 1A



Display Pages

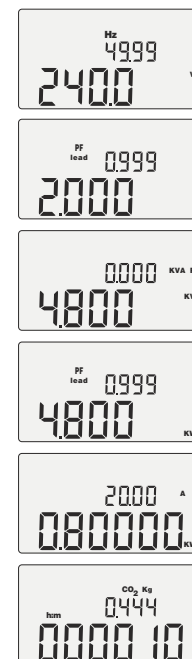

POWERGUARD is a simple to use and easy to handle product which is widely used because of its portability and light weight

Measures

- TRMS Voltage (V)
- Frequency (Hz)
- TRMS Current (A)
- Power Factor (PF)
- Apparent Power (KVA)
- Reactive Power (KVAR)
- Active Power (KW)
- Energy Consumption (KWh)
- Energy Usage Time (EUT)
- Carbon Emission (CO₂ in kg)

Features

- Three Pin Socket & Plug Suitable for Indian Socket
- Large Dual Row LCD Display with Backlight & Annunciator
- Memory Retention (KWh, EUT)
- Simple, Easy & Accurate
- Continuous Measurement
- Counts CO₂ generated by Electrical Equipment (0.555kg CO₂ is generated by using 1KWh Energy)


General Specifications

- Accuracy : Class 1.0
- Power Consumption : Less than 2W (with backlight)
- Working Temperature : -10°C to +55°C, <70% RH
- Dimensions : 156 x 78 x 48mm (approx.)
- Weight : 300gms (approx.)

Specifications

Function	PG09 - 20A	PG09 - 5A	PG09 - 1A	Accuracy
RMS Voltage (V)	240V AC (Nominal) (195V ~ 265Vrms)			± 0.5% of FS
RMS Current (A)	(0.110 ~ 20.00) Arms	(0.100 ~ 6.000) Arms	(0.010 ~ 1.200) Arms	± 0.5% of FS
Active Power @240VAC (KW)	(0.026 ~ 4.800) KW	(0.024 ~ 1.440) KW	(2.400 ~ 288.0) W	±1.0% of FS
Apparent Power @240VAC (KVA)	(0.026 ~ 4.800) KVA	(0.024 ~ 1.440) KVA	(2.400 ~ 288.0) VA	±1.0% of FS
Reactive Power @240VAC (KVAR)	(0.026 ~ 4.800) KVAR	(0.024 ~ 1.440) KVAR	(2.400 ~ 288.0) VAR	±1.0% of FS
Power Factor (PF)	(0.026 ~ 0.120) KW	(0.024 ~ 0.096) KW	(0.021.6 ~ 048.0) W	> 0.03 PF
	(0.120 ~ 4.800) KW	(0.096 ~ 1.440) KW	(048.0 ~ 288.0) W	< 0.03 PF
Line Frequency (Hz)	45.00 ~ 55.00 Hz			± 0.2 Hz
Active Energy (KWh)	000000 ~ 999999 KWh			Class 1
Energy Usage Time (EUT)	Hours / Minutes			NA
Carbon Emission (CO ₂ in kg)	CO ₂ (Kg)			NA
Applications	Teaching, Demonstration & Testing of Electrical Energy Consumption of Residential & Commercial Appliances. It can be used in Houses, Offices, Shops, Schools, Laboratories etc.			

Ordering Information : Model & Range

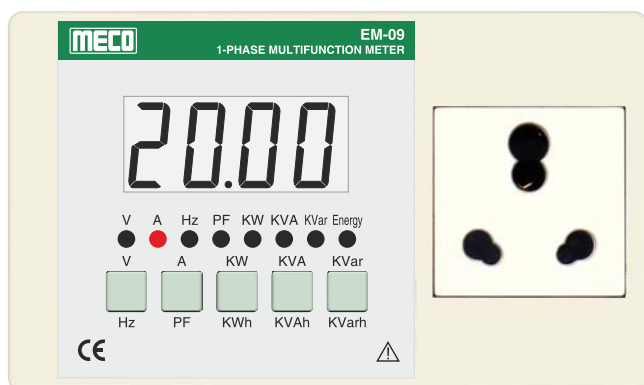

EM-09 (20A),

EM-09 (5A),

EM-09 (1A)

Features

- Measures V, A, PF, Hz, KW, KVA, KVAh, KWh, KVAh & KVarh
- TRMS Measurement
- Can be used for Continuous Monitoring
- Auto / Manual Scroll Display (User Selectable)
- State of Art Microcontroller Design
- Portable, Easy to Carry and Simple to Use
- LCD Display with Backlight (White)
- RS 485 Port (4kV Isolated) with MODBUS RTU Protocol (Optional)
- POWER MASTER Software for MIS Reports (Optional)

Specification


Functions	EM-09 (20A)	EM-09 (5A)	EM-09 (1A)	Accuracy
RMS Voltage	85~265Vrms			±(0.5% FS +1 dgt.)
RMS Current	(0.900A ~ 24Arms)	(0.125A ~ 6.0Arms)	(0.025A ~ 1.2Arms)	
Active Power	0.216 ~ 5.300 KW	0.030 ~ 1.590 KW	0.006 ~ 0.318 KW	±(0.5% FS +1 dgt.) [Cosφ=0.3 to 1.000]
Apparent Power	0.216 ~ 5.300 KVA	0.030 ~ 1.590 KVA	0.006 ~ 0.318 KVA	±(0.5% FS +1 dgt.)
Reactive Power	0.216 ~ 5.300 KVAr	0.030 ~ 1.590 KVAr	0.006 ~ 0.318 KVAr	±(1.0% FS +1 dgt.) [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead			±(0.01 PF +1 dgt.)
Line Frequency	45.00 ~ 55.00 Hz			±0.1 Hz
Active Energy (KWh)	0000 ~ 9999 KWh			Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh			
Reactive Energy (KVArh)	0000 ~ 9999 KVArh			

Note : KW / KVA / KVAh Measurements require Vrms x Irms x Cosφ/Sinφ ≥ 0.006 (for 1A Meter), ≥ 0.030 (for 5A Meter) and ≥ 0.216 (for 20A Meter)

Model	EM-09 (20A)	EM-09 (1A/5A)
Case / Housing	ABS Case Suitable for Desktop Mounting / Portable / Wall Mounting Application	
Socket & Plug	6A / 20A Multi Socket & 20A Plug	6A Socket & 6A Plug
Auxiliary Power Supply	85-265V AC Supplied with 1 Phase Power Cord	
Dimensions (mm)	164 x 100 x 65mm (approx.)	


Ordering Information : Model, Input Current (20A or 5A or 1A any one only) & RS485 Port (Optional)

Display Pages

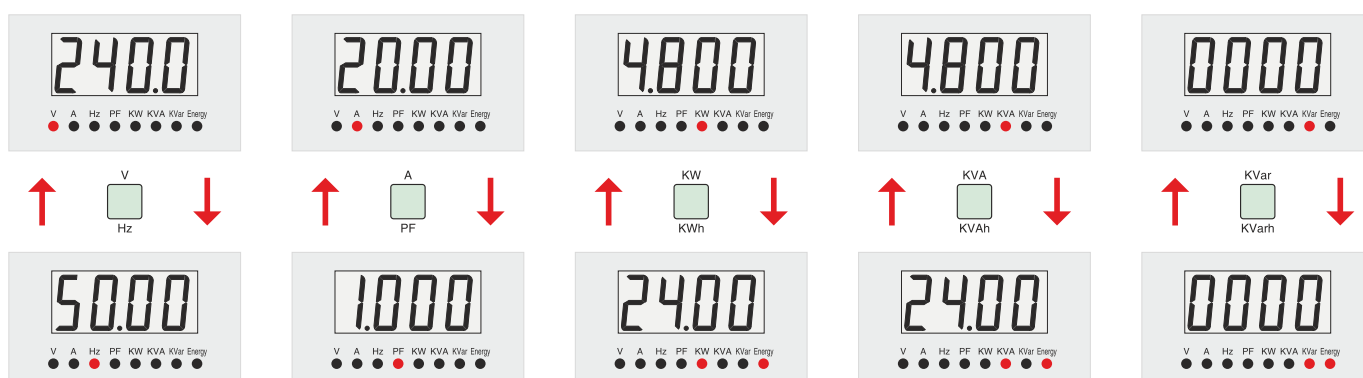


Application

- Appliances Testing (AC, Refrigerator, Washing Machine etc.)
- LED Lights Testing
- Can be given to Field Technicians in their Tool Kit
- Energy Audit and Plant Maintenance
- Studying Energy Efficiency of Electrical Equipment
- Building Management Systems
- Power Management
- Product Quality Testing

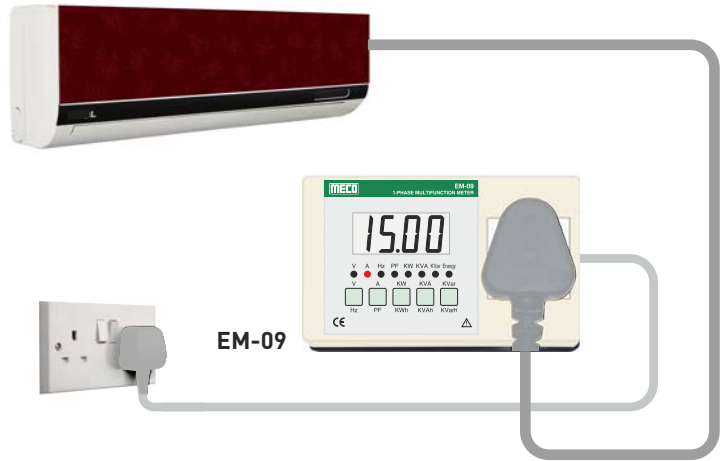


many more ...


POWER MASTER Software

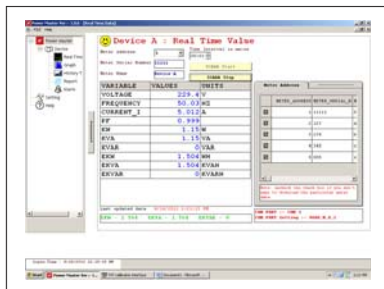


REAL TIME DISPLAY

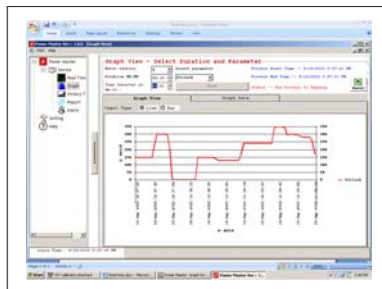


LINE GRAPH DISPLAY

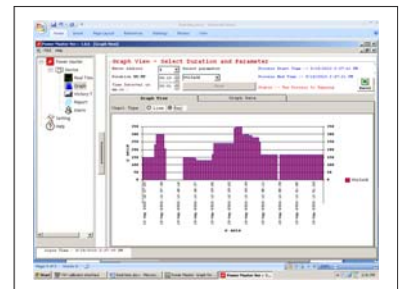


BAR GRAPH DISPLAY

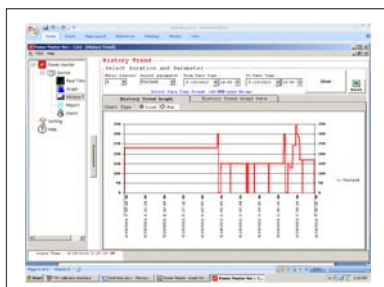

HISTORY TREND -
LINE GRAPH DISPLAY

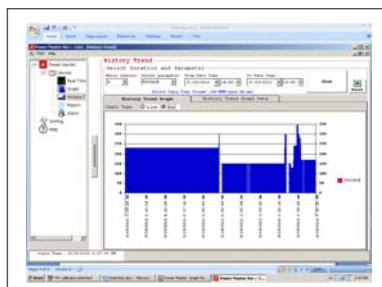


HISTORY TREND -
BAR GRAPH DISPLAY

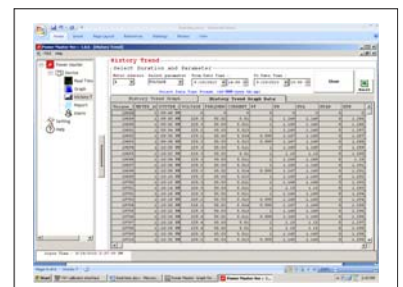

REPORT VIEW DISPLAY



**EM-08(5A)
EM-08(1A)**



**EM-08D(5A)
EM-08D(1A)**



Features

- 10 Parameters on 10 Display Pages
- Measures V, A, PF, Hz, KW, KVA, KVAh, KVAh & KVAh
- Auto / Manual Scroll Display (User Selectable)
- Reduces Panel Space and Wiring Time
- State of The Art Microcontroller Design
- TRMS Measurement
- Ideal for Testing of Electrical Appliances
- User Programmable CT Ratio [1.00 - 99.99]
- LCD Display with Backlight (20mm Digit Height)

Application

- Appliance Testing
- Energy Audit
- QC
- Studying Energy Efficiency of Electrical Equipment
- Building Management Systems
- Power Management
- Generator / Motor Characteristics
- Plant Maintenance



Specification

Functions		EM-08/EM-08D(1A)	Accuracy
RMS Voltage	50.0 ~ 300 Vrms		±(0.5% FS +1 dgt.)
RMS Current (any one range only)	[0.25 ~ 6.0 Arms]	[0.05 ~ 1.2 Arms]	±(0.5% FS +1 dgt.)
Active Power	0.012 ~ 1.800 KW	0.002 ~ 0.360 KW	±(0.5% FS +1 dgt.) [Cosφ=0.3 to 1.000]
Apparent Power	0.012 ~ 1.800 KVA	0.002 ~ 0.360 KVA	±(0.5% FS +1 dgt.)
Reactive Power	0.012 ~ 1.800 KVAr	0.002 ~ 0.360 KVAr	±(1.0% FS +1 dgt.) [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead		±(0.01 PF +1 dgt.)
Line Frequency	45.00 ~ 65.00 Hz		±0.1 Hz
Active Energy (KWh)	0000 ~ 9999 KWh		Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh		
Reactive Energy (KVArh)	0000 ~ 9999 KVArh		

Model		EM08	EM08D
Case / Housing Material		DIN Black ABS, Dimension as per DIN 43700	Portable Type, Desk Top Case with Tilt Stand
Mounting Clamps		Sturdy, Moulded Derlin with suitable Hardware	Desk Top Type
Terminals / Connectors		Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal	For Input connections 10Amps Binding Post Terminals on the Front panel.
Auxiliary Power Supply		230VAC ±20%, 50Hz	230VAC ±20% 50Hz, Switch & Fuse for Aux. Supply at the Back, Supplied with 1-Phase Power Cord
Dimension (mm)	Front	96 x 96	
	Depth (Behind Bezel Panel)	90	
	Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	

Ordering Information: Model, Input Voltage, Input Current (1A or 5A - any one only), CTR & Auxillary Supply

Connection Diagram

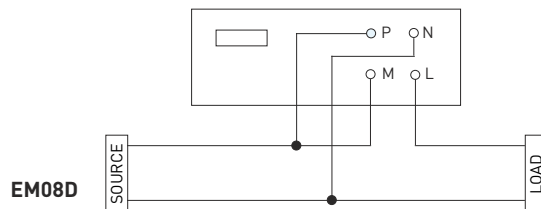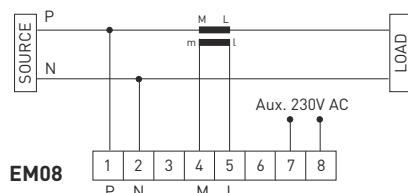



EM-08S (5A)
EM-08S (1A)



- 10 Parameters on 10 Display Pages
- Measures V, A, PF, Hz, KW, KVA, KVAh, KVarh & KVar
- Auto / Manual Scroll Display (User selectable)
- SMPS Power Supply (85 - 265VAC/DC)
- Ideal for Testing of Electrical Appliances
- User Programmable CT Ratio (1.00 - 99.99)
- TRMS Measurement
- 4 Digit LCD Display with Backlight (20mm Digit Height)
- LED Indicator for Parameter Indication
- RS 485 Port (4KV Isolated) (Optional)
- MODBUS RTU Protocol (Optional)
- POWER MASTER Software (Optional)
- Home Appliance Testing
- Energy Audit
- QC
- Studying Energy Efficiency of Electrical Equipment
- Building Management - Systems
- Power Management
- Generator/ Motor Characteristics
- Plant - Maintenance

Specification


Functions			Accuracy
RMS Voltage	50.0 ~ 300Vrms		±[0.5% FS +1 dgt.]
RMS Current (Any One Range Only)	(0.125A ~ 6.0Arms)	(0.025A ~ 1.2Arms)	
Active Power	0.030 ~ 1.800 KW	0.006 ~ 0.360 KW	±[0.5% FS +1 dgt.] [Cosφ=0.3 to 1.000]
Apparent Power	0.030 ~ 1.800 KVA	0.006 ~ 0.360 KVA	±[0.5% FS +1 dgt.]
Reactive Power	0.030 ~ 1.800 KVAr	0.006 ~ 0.360 KVAr	±[1.0% FS +1 dgt.] [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead		±[0.01 PF +1 dgt.]
Line Frequency	45.00 ~ 55.00 Hz		±0.1Hz
Active Energy (KWh)	0000 ~ 9999 KWh		Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh		
Reactive Energy (KVArh)	0000 ~ 9999 KVArh		

Note : KW / KVA / KVAh Measurements require Vrms x Irms x Cosφ / Sinφ ≥ 0.006 (for 1A Meter), ≥ 0.030 (for 5A Meter)

Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700		
Mounting Clamps	Sturdy, Moulded Derlin with suitable Hardware		
Terminals / Connectors	Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal		
Auxiliary Power Supply	SMPS (85 - 265 VAC/DC)		
Dimension (mm)	Front	96 x 96	
	Depth (Behind Bezel Panel)	43	
	Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	

Ordering Information: Model, Input Voltage, Input Current (1A or 5A any one only) & RS485 Port (Optional)

Connection Diagram

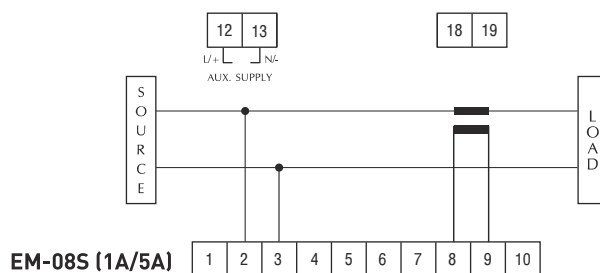

Date: 7 December 2015



To,
Mr. Premchand Goliya – C.M.D.
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710

Dear Sir,

Sub : Testimonial for Supply of MECO Multifunction Meter (Energy Modules) Model MFM96S-ICICI for CMS Project of ICICI Bank Branch on Pan India basis.

Ref : PO No./15-16/0121 Dt. 22/06/2015 Supply of MECO-MFM96S-ICICI Qty. 500 Nos.

Refer our above Purchase order for Supply of MECO Make Multifunction Meter (Energy Modules) Model MFM96S-ICICI for CMS Project of ICICI Bank Branch on Pan India basis.

We like to inform you that M/s. MECO Instruments Pvt. Ltd. has executed the above purchase order satisfactory as per delivery schedule given by us.

We are already in process of installing of MECO Make MFM-96S Meter (Energy Module) in MFM Panel at our customer's different sites. We find MECO Multifunction Meter (Energy Modules) Model MFM96S-ICICI & MECO-V Make Current Transformer is working satisfactory where ever it has been installed.

We also appreciate Mr. Haren Shah for extending his timely service and support and sincere effort during Training, Installation & Commissioning of MFM Panel several times.

We look forward to have similar kind of support from MECO Team member in future as and when require.

Thanking You,

Your Faithfully,



Kalpana Mane
Head – Purchases
Securans Systems Pvt. Ltd.



Securans Systems Pvt. Ltd.
3rd floor, B-Wing, Greenspace Technology, Plot No. X-4/1 & X-4/2, Mahape, Navi Mumbai – 400 701
☎ +91 22 6178 9400 ☎ www.securans.in CIN-U74999MH2011PTC225609



Date: 17/12/2014

To,
Director,
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710
Tel. No. 022 – 27673300 Fax No. 022 – 27673310

Dear Sir,

Sub : Visit at NELCO'S Mahape Work to Monitor & Record Power Consumption Data at 2 X 160KVA UPS Output Panel with MECO Power & Harmonics Analyzer Model PHA 5850 Kit.

Please refer visit of Mr. Haren Shah - Senior Marketing Executive of Meco Instruments Pvt. Ltd. Navi Mumbai at our above work as on 28/11/2014 with MECO Power & Harmonics Analyzer Model PHA 5850A for the above subject.

The visit was in accordance with request by Mr. Sanjay Sinhal to MECO to Monitor and Record the Power consumption at various points of 160KVA UPS Output Panel installed at NELCO'S Server Room.

Mr. Shah showed us Online Power Parameters on PHA 5850 which were witnessed by Mr. Sanjay Sinhal and Mr. Nitin Kulkarni. The recorded data with reports were then sent to us by Email from Mr. Shah very next day. The Reports and data received by us were very satisfactory and as per our expectation.

We thanks Mr. Haren Shah to carry out such activity in short notice. We also appreciate Mr. Shah for excellent service provided to us with report and data.

We find MECO Analyzer Model 5850 Kit is very useful for Online monitoring and recording the Power and Harmonics data. This instrument is also helpful for Energy Monitoring purpose at several locations and time to time.

Thanking You,
Yours Faithfully,

Nelco Ltd.

Nitin Kulkarni
Officer Maintenance



GE
Intelligent Platforms

City: 07220068199/PTC22315#
Vellore: Tech Park, No.43
1st floor, Building 9
Electronics City, Hosur Road
Bangalore 560 100
Website: www.ge.com
T : +91 80 4251 5300-99
F : +91 80 4251 5305-06

Ref: Vendor/Approval/15-16

Date : 01/15/2015.

To,
M/s. Meco Instruments Pvt. Ltd.
Plot No. EL-1, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai – 400 710.
Tel No. : 022 27673300
Fax No. : 022 27673330
Email : kamal@meconst.com

Kind Attn. : Mr. Kamal Goliya / P. Gawade

Sub: Vendor Appraisal

We thank you for your support extended to us for supply of various Electrical and Electronic Testing and Measuring Instruments and Transducers.


We have been using MECO Multifunction Meters, Digital Panel Meters, Power Line Transducers, Testing and Measuring Instruments. Since more than past 5 years in our DMRC projects to our complete satisfaction.

The presales and post-sales service and support offered are prompt and timely.

We hope to have similar support from your organization for future years too so that we can all mutually achieve higher targets.

We once again thank you for your support extended to fulfill our customer needs.

Yours Faithfully,
For GE Intelligent Platforms Pvt Ltd.



Chandrashekar Hegde
Sourcing Leader



Registered Office: All Intelligent Platforms: CIN: U72208KA1997PTC22315# Vellore: Tech Park, No.43, 1st floor, Building 9, Electronics City, Hosur Road, Bangalore-560100
Hosur Road, Bangalore-560100, India. T : +91 80 4251 5300-04, F : +91 80 4251 5305-06



Yokogawa India Limited

Regd. Office:
Plot No. 96, Electronics City Complex,
Hosur Road,
Bangalore - 560106, India
Tel : +91-080-41596000
Fax : +91-080-28521442



YIL/APP/20923/2022
10th May, 2022

M/s. Meco Instruments Pvt. Ltd.
EL-1, MIDC Electronic Zone, TTC Industrial Area,
Mahape,
Navi Mumbai – 400710

Subject: Certificate of Appreciation

Dear Mr. Kishorkumar Thakare,


We are glad to inform you that we are very much satisfied with the performance of your Multifunction Meters, Transducers and Panel Meters.

We thank you for your exceptional sales and service support and attending our queries / requests in a professional and timely manner.

We hope that the same support will be extended to us in future also and will strengthen our business relations.

Thanking you, we remain

Very truly yours,
For YOKOGAWA INDIA LIMITED,



Chandrashekar Hegde,
Manager – Procurement
Centralized Materials Management

For Internal Use Only

CIN No : U74210KA1987FLC008304


Email ID : YIL-contactus@yokogawa.com

Website : http://www.yokogawa.com/in



Digital Panel Meters

- ✓ Ammeter & Voltmeter - TRMS
- ✓ Process Indicators
- ✓ Frequency Meters
- ✓ RPM Meters
- ✓ Power Factor Meters
- ✓ Watt, VAR and VA Meters
- ✓ LCD & LED Modules



+60
YEARS
ONE MISSION



Reliable




Long-Lasting



Affordable



SMP35



SMP9635

Specification


■ Measuring Method	3½ Digit - Dual Slope A/D Conversion	■ VA Burden (Typical)	Auxiliary : < 5VA Voltage Input : < 0.1VA Current Input : < 0.5VA, < 0.2VA in 20A
■ Sampling Rate	2.5 Samples per Second	■ Environmental Conditions	0 to 50°C, <70% RH (Operation) -10 to 70°C, <70% RH (Storage)
■ Display Type	Red LED (Standard)	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Input - Auxiliary and Case - Terminals
■ Display Height	14.2mm / 0.56" (Standard) 20mm / 0.8" (Optional)	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Maximum Display	1999 Counts	■ Bezel	Snap-Fit, Dimension as per DIN 43718
■ Resolution	0.001 to 1 Count	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Polarity Indication	" - " is indicated for Negative Input	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Decimal Selection	Field Selectable		
■ Over Range Indication	" 1 " or " -1 "		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		
■ Frequency Response	40 - 400Hz		
■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators		

Model	Input		Range	Aux. Power Supply (Any One Only)	Accuracy
SMP35/ SMP9635	DC	mV	0-200	230V AC ± 10% @ 50Hz (Standard) OR 110V AC ± 10% @ 50Hz (Optional)	± 0.5% of FSD + 2 digits
		V	0-2, 20, 200, 1000		
		mA	0-2, 20, 200		
		A	0 - 2, 5, 20		
		Zero Supp.	4 - 20mA		
	AC	mV	0 - 200		
		V	0 - 2, 20, 200, 750		
		mA	0 - 2, 20, 200		
		A	0 - 2, 5, 20		

	48 x 96	96 x 96
	135	135
	44 (+0.5, -0.0) x 92 (+0.8, -0.0)	92 (+0.8, -0.0) x 92 (+0.8, -0.0)

Model, Input Range, CTR / PTR (if any), Scale Display, Auxillary Supply & Optionals

Terminal Connection

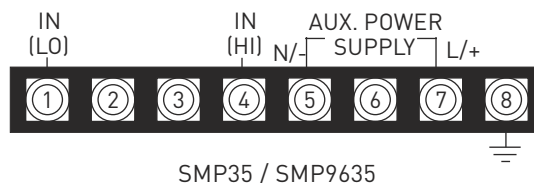



SMP35S



SMP9635S

Specifications


■ Measuring Method	Dual Slope A/D Conversion	■ Frequency Response	40 - 400Hz
■ Sampling Rate	2.5 Samples per Second	■ VA Burden (Typical)	Auxiliary (230V AC) : < 5VA Auxiliary (Others) : < 2.5VA Voltage : < 1.0VA Current : < 1.0VA
■ Display Type	0.56" / 14.2mm Red LED Super Bright Display	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Input - Auxiliary - Case - Terminals
■ Maximum Display	3½ Digit / 1999 Counts (Max)	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Display Stability	Within ± 2 Digits	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Resolution	0.001 to 1 Count depending on range	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Polarity Indication	" - " is indicated for Negative Input	■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Decimal Selection	Field Selectable		
■ Over Range Indication	" 1 " or " -1 "		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		
■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators		

Model	Input		Range	Auxiliary Power Supply (Any One Only)			Accuracy Class
				230V AC	19-90V AC/DC	85-265V AC/DC	0.5
SMP35S / SMP9635S	DC	mV	0 - 200	✓	✓	✓	✓
		V	0 - 2, 20, 200, 1000	✓	✓	✓	✓
		mA	0 - 2, 20, 200	-	✓	✓	✓
		A	0 - 1, 2, 5, 20	✓	✓	✓	✓
		Zero Supp.	4-20mA or 1 - 5V	-	✓	✓	✓
		Re-Scaleable	0 - 5V / 10V DC, 1 - 5V DC, 0 - 20mA DC, 0 - 50 / 60 / 75mV, 4 - 20mA (any one) to display 0.100 to 1600 in 64 steps. Please suffix these models with RS as SMP35SRS or SMP9635SRS	✓	✓	✓	✓
	AC	V	0 - 2, 20, 200, 750	✓	✓	✓	✓
		A	0 - 1, 2, 5, 20	✓	✓	✓	✓
		Re-Scaleable	0 - 1A or 0 - 5A (anyone) to display 0.100 to 1600 in 64 steps. Please suffix models with RS as SMP35SRS or SMP9635SRS	✓	✓	✓	✓

Ordering Information : Model, Input Range, Auxiliary Supply & Scale Display

Note : Tap Change Meter On Request

Standard : As per IS 13875

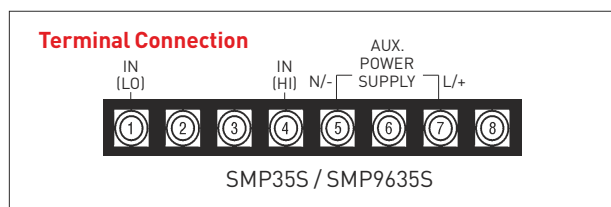

Dimensions (mm)		
Model	SMP35S	SMP9635S
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	44 ^[+0.5, -0.0] x 92 ^[+0.8, -0.0]	92 ^[+0.8, -0.0] x 92 ^[+0.8, -0.0]



SMP35SW



SMP9635SW

Features

- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 9999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point

Specifications

- | | | | |
|---------------------------------|---|-----------------------------------|---|
| ■ Measuring Method | TRMS Using Microcontroller | ■ Sampling Rate | 3 Samples / Second . |
| ■ Display Type | 0.56" / 14.2 mm Red LED Super Bright Display | ■ Response Time | 250ms |
| ■ Maximum Display | 4 Digit / 9999 (Max.) Counts | ■ Environmental Conditions | 0°C to + 55°C, < 70% RH (Operation)
-10°C to + 70°C, < 70% RH (Storage)
27°C ±5°C (Calibration) |
| ■ Display Stability | Within ±2 Digit | ■ Dielectric Strength | 2.5KV @ 50Hz for 1 minute between Input - Auxiliary & Case -Terminals |
| ■ Resolution | 0.001 to 1 Count Depending on Range / Scale Display | ■ Impulse Withstand | 3.5KV, 1.2 / 50 micro second |
| ■ Decimal Point | Auto Selection | ■ Case / Housing Material | DIN Black ABS, Dimension as per DIN 43700 |
| ■ Over Range Indication | " Or " | ■ Faceplate / Lens | Red Antiglare Face Plate with Annunciators |
| ■ Under Range Indication | NA | ■ Mounting Clamps | Sturdy, Moulded ABS with Suitable Hardware |
| ■ Maximum Overload | Voltage : 1.2 Times Continuous
Current : 1.5 Times Continuous | ■ Connectors / Terminal | Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal |
| ■ VA Burden (Typical) | Auxiliary : ≤ 1.5VA
Voltage Input : ≤ 1.0VA
Current Input : ≤ 1.0VA | | |
| ■ Frequency Response | 40 - 400Hz | | |


Model	Input		Range (Any One Only)	Programmable Display Key Inside Facia	Aux Supply (Any One Only)	Accuracy
SMP35SW / SMP9635SW	DC	mV	0 - 75 (Shunt Operated)	✓[*]	85 -265V AC/DC @50/60Hz OR 19-90V AC/DC @50/60Hz (Optional)	±0.5% of FSD
			0 - 200	-		
		V	0 - 2, 20, 200	-		
			0 - 1000	-		
		mA	0 - 2, 20 , 200	-		
		A	0 - 2, 5, 20	-		
		Re-Scaleable	4 - 20mA, 0 - 20mA, 0 - 10V	✓		
	AC	V	0 - 110 (PTR Operated)	✓[#]		
			0 - 2, 20, 200, 750	-		
		mA	0 - 200, 500	-		
			0 - 1 (CT Operated)	✓[*]		
		A	0 - 5 (CT Operated)	✓[*]		
			0 - 20 (Direct)	-		

Standard : As per IS 13875

Terminal Connection



SMP35SW / SMP9635SW

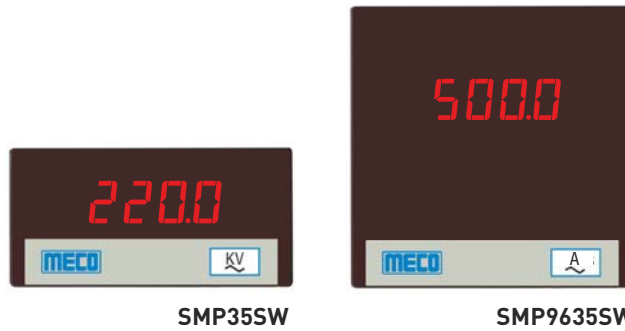

User Programmable PTR Display Value (Using Internal Key Inside Facia)

Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)
1	1	0.110	5	30	3.300	9	300	33.00	13	2000	220.0
2	3.77	0.415	6	60	6.600	10	600	66.00	14	4000	440.0
3	4	0.440	7	100	11.00	11	1000	110.0	-	-	-
4	20	2.200	8	200	22.00	12	1200	132.0	-	-	-

*** User Programmable CT Primary / Shunt Display Value (Using Internal Key Inside Facia)**

CT Primary / Shunt Display Value								
1	25	70	150	350	700	1500	4000	8000
5	30	75	175	400	750	1600	5000	9000
10	40	80	200	450	800	2000	6000	-
15	50	100	250	500	1000	2500	7000	-
20	60	125	300	600	1200	3000	7500	-

Dimensions (mm)		
Model	SMP35SW	SMP9635SW
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)

Ordering Information : Model, Input, Range, CTR / PTR (if any), Scale Display & Aux. Supply.


NOTE : This is an Upgraded Version of SMP35S

KEY


For Setting Please Refer Instruction Manual
For Range Input 4-20mA DC / 0-20mA DC / 0-10V DC

For Setting CTP / Shunt / PTR


- Power on DPM
- Remove Front Facia
- Press Key on Display Card once
- Meter will Show Present Set Display Value
- Press-Release until the Desired Value is Displayed



SMP72 - DC



SMP72 - AC



SMP72 - AC



SMP48 - DC



SMP48 - AC

Features

- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 9999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point

Specifications

- | | |
|--|--|
| <ul style="list-style-type: none"> ■ Measuring Method TRMS Using Microcontroller ■ Display Type 0.56" / 14.2mm Red LED Super Bright Display ■ Maximum Display 4 Digit / 9999 (Max.) Counts ■ Display Stability Within ± 1 Digit ■ Resolution 0.001 to 1 Count Depending on Range / Scale Display ■ Over Range Indication " Or " ■ Under Range Indication NA ■ Sampling Rate 3 Samples / Second ■ Response Time 250ms ■ Maximum Overload Voltage : 1.2 Times Continuous
Current : 1.5 Times Continuous ■ Frequency Response 40 - 400Hz | <ul style="list-style-type: none"> ■ VA Burden (Typical) Auxiliary : $\leq 1.5VA$
Voltage Input : $\leq 1.0VA$
Current Input : $\leq 1.0VA$ ■ Environmental Conditions 0°C to + 55°C, < 70% RH (Operation)
-10°C to + 70°C, < 70% RH (Storage)
27°C $\pm 5^\circ C$ (Calibration) ■ Dielectric Strength 2.5KV @ 50Hz for 1 minute between Input - Auxiliary & Case -Terminals ■ Impulse Withstand 3.5KV, 1.2 / 50 micro second ■ Case / Housing Material Polycarbonate, Black ■ Faceplate / Lens Polycarbonate Transparent Red ■ Connectors / Terminal Nylon 66, 33% GF, Black / Brass ■ Mounting Clamps Sturdy, Moulded Derlin with Suitable Hardware |
|--|--|

Model	Input		Range (Any One Only)	Programmable Display Key	Aux Supply (Any One Only)	Accuracy
SMP48 / SMP72 / SMP96	DC	mV	0 - 75 (Shunt Operated)	✓[*]	85-265V AC / DC @ 50 / 60Hz (Standard) OR 24V & 48V DC (Optional) OR 230V AC @ 50 / 60Hz (Optional for SMP72 / SMP96)	$\pm 0.5\%$ of FSD
			0 - 200	-		
		V	0 - 2, 20, 200, 1000	-		
		mA	0 - 2, 20, 200	-		
		A	0 - 2, 5A	-		
			0 - 20 (Direct)	-		
	AC TRMS	V	0 - 110 (PT Operated)	✓[#]		
			0 - 2, 20, 200, 750	-		
		A	0 - 1 (CT Operated)	✓[*]		
			0 - 5 (CT Operated)	✓[*]		
			0 - 20 (Direct)	-		

Standard : As per IS 13875


Terminal Connection

AUX 85-265V AC/DC		INPUT	
P	N	LO	HI
1	2	3	4

SMP72

INPUT		AUX 85-265V AC/DC	
HI	LO	N	P
1	2	3	4

SMP48 / SMP96

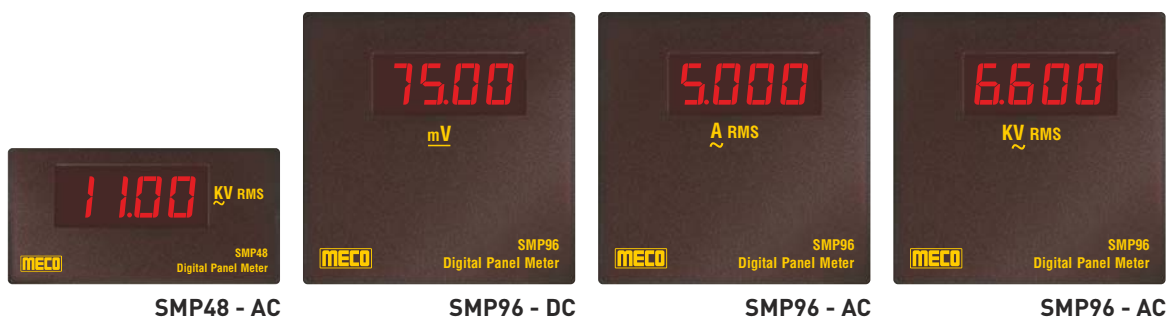

User Programmable PTR Display Value (Using Key)


Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)
1	1	0.110	5	30	3.300	9	300	33.00	13	2000	220.0
2	3.77	0.415	6	60	6.600	10	600	66.00	14	4000	440.0
3	4	0.440	7	100	11.00	11	1000	110.0	-	-	-
4	20	2.200	8	200	22.00	12	1200	132.0	-	-	-

*** User Programmable CT Primary / Shunt Display Value (Using Key)**

CT Primary / Shunt Display Value								
1	25	70	150	350	700	1500	4000	8000
5	30	75	175	400	750	1600	5000	9000
10	40	80	200	450	800	2000	6000	-
15	50	100	250	500	1000	2500	7000	-
20	60	125	300	600	1200	3000	7500	-

Dimensions (mm)			
Model	SMP72	SMP48	SMP96
Front	72 x 72	48 x 96	96 x 96
Depth (Behind Bezel)	43	58	39.5
Panel Cut-Out	68 x 68	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)

Ordering Information : Model, Input Range, Aux. Supply & Scale Display (CTR / PTR / Shunt Value)

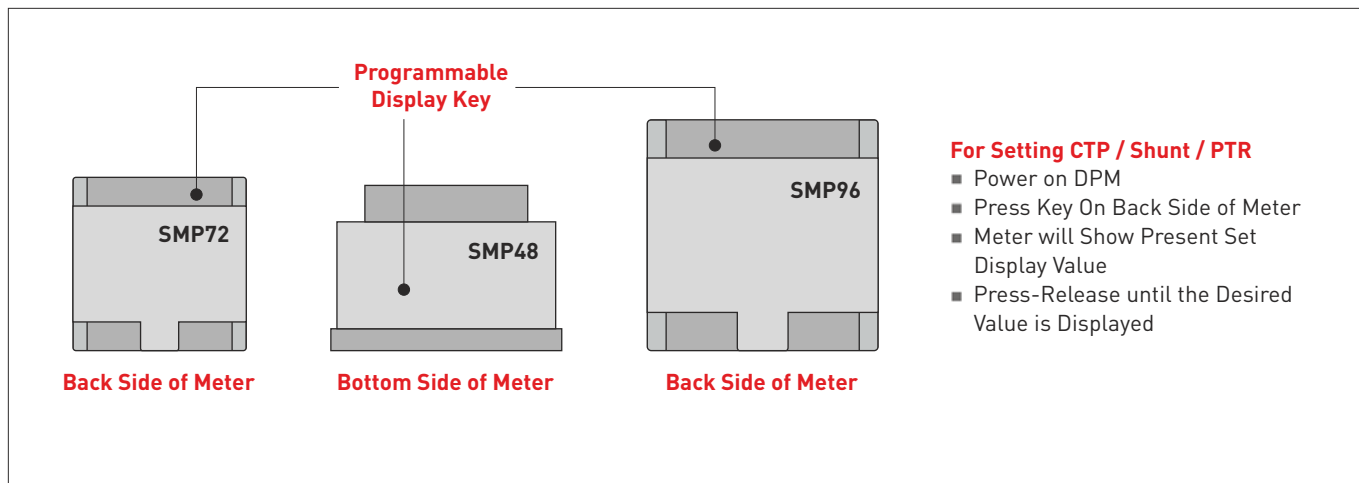



SMP45SW



SMP9645SW

Features

- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 19999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point


Specifications

■ Measuring Method	TRMS Using Microcontroller	■ Polarity Indication	"-" is Indicated for Negative Input
■ Display Type	0.56" / 14.2mm Red LED Super Bright Display	■ VA Burden (Typical)	Auxiliary : ≤ 1.5VA Voltage Input : ≤ 1VA Current Input : ≤ 0.5VA
■ Maximum Display	4½ Digit / 19999 (Max.) Counts	■ Environmental Conditions	0°C to + 55°C, < 70% RH (Operation) -10°C to + 70°C, < 70% RH (Storage) 27°C ±5°C (Calibration)
■ Display Stability	Within ±2 Digit	■ Dielectric Strength	2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
■ Resolution	0.0001 to 1 Count Depending on Range / Scale Display	■ Impulse Withstand	3.5KV, 1.2 / 50 Micro Second
■ Decimal Point	Auto Selection	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Over Load Indication	"-OL-"	■ Faceplate / Lens	Red Antiglare Face plate with Annunciators
■ Under Load Indication	NA	■ Connectors / Terminal	Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal
■ Sampling Rate	3 Samples / Second	■ Mounting Clamps	Sturdy, Moulded ABS with Suitable Hardware
■ Response Time	250ms		
■ Maximum Overload	Voltage : 1.2 Times Continuous Current : 1.2 Times Continuous		
■ Frequency Response	40 - 400Hz		
■ Auxiliary Supply	85 - 265V AC / DC (Standard) 19 - 90V AC / DC (Optional) 24V & 48V DC (Optional)		

Model	Input	Range	Programmable Display Key (inside facia)	4½ Digit	5 Digit	Aux. Supply (Any One Only)	Accuracy
SMP45SW / SMP9645SW	DC	mV	0 - 75 (Shunt Operated)	✓[*]	✓	85-265V AC / DC @ 50 / 60Hz OR 19-90V AC / DC @ 50 / 60Hz (Optional) OR 24V & 48V DC (Optional)	± 0.5% of FSD
			0 - 200	-	✓		
		V	0 - 2, 20, 200	-	✓		
			0 - 1000	-	✓		
		mA	0 - 2, 20, 200	-	✓		
		A	0 - 2, 5	-	✓		
	AC TRMS	V	0 - 110 (PT Operated)	✓[#]	-		
			0 - 2, 20, 200, 750	-	✓		
		I	0 - 1 (CT Operated)	✓[*]	-		
			0 - 5 (CT Operated)	✓[*]	✓		

Standard : As per IS 13875

Terminal Connection

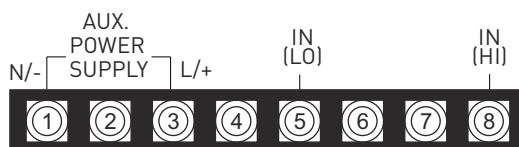

SMP45SW / SMP9645SW



SMP45SW



SMP9645SW

User Programmable PTR Display Value (Using Internal Key Inside Facia)

Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)
1	1	0.1100	5	30	3.3000	9	300	33.000	13	2000	220.00
2	3.77	0.4150	6	60	6.6000	10	600	66.000	14	4000	440.00
3	4	0.4400	7	100	11.000	11	1000	110.00	-	-	-
4	20	2.2000	8	200	22.000	12	1200	132.00	-	-	-

* User Programmable CT Primary / Shunt Display Value (Using Internal Key Inside Facia)


CT Primary / Shunt Display Value							
1	30	80	250	600	1500	5000	10000
5	40	100	300	700	1600	6000	12000
10	50	125	350	750	2000	7000	15000
15	60	150	400	800	2500	7500	20000
20	70	175	450	1000	3000	8000	-
25	75	200	500	1200	4000	9000	-

Dimensions (mm)

Model	SMP45SW	SMP9645SW
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)

Ordering Information : Model, Input Range, CTR / PTR / SHUNT (if any), Scale Display & Auxiliary Supply

NOTE : This is an Upgraded Version of SMP45S

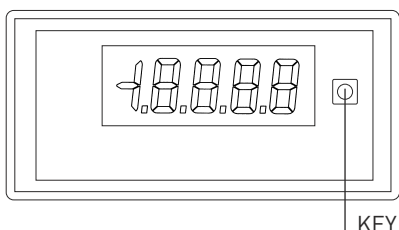

For Setting CTP / Shunt / PTR

- Power on DPM
- Remove Front Facia
- Press Key on Display Card once
- Meter will Show Present Set Display Value
- Press-Release until the Desired Value is Displayed



SMP45

Specification

■ Measuring Method	Dual Slope A/D Conversion	■ VA Burden (Typical)	Auxiliary : < 5VA Voltage Input : < 0.1VA Current Input : < 0.5VA, < 0.2VA in 20A
■ Sampling Rate	2.5 Samples per Second	■ Environmental Conditions	0 to 50°C, <70% RH (Operation) -10 to 70°C, <70% RH (Storage)
■ Display Type	Red LED (Standard)	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Input - Auxiliary and Case - Terminals
■ Display Height	14.2mm / 0.56" (Standard)	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Maximum Display	19999 Counts	■ Bezel	Snap-Fit, Black ABS, Dimension as per DIN 43718
■ Resolution	0.0001 to 1 Count depending on the range	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Polarity Indication	" - " is indicated for negative input	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Decimal Selection	Field Selectable		
■ Over Range Indication	"0000" blinking		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		
■ Frequency Response	40 - 400Hz		
■ External Start Hold	Optional		
■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators		


Model	Input	Range	Aux. Power Supply (Any One Only)	Accuracy
SMP45	DC	mV	230V AC \pm 10% OR 220V DC (Optional)	\pm 0.5% of FSD + 2 digits
		V		
		mA		
		A		
		Zero Supp.		
	AC	mV		
		V		
		A		

Dimensions (mm)

Model	SMP45
Front	48 x 96
Depth (Behind Bezel)	135
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)

Ordering Information : Model, Input Range, CTR / PTR (if any), Scale Display, Auxillary Supply & Optionals

Terminal Connection

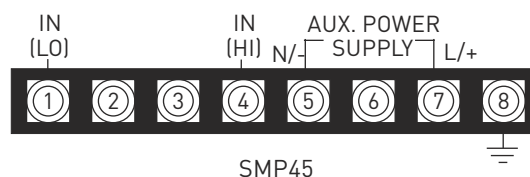



SMP45SW



SMP9645SW

Features

- High Accuracy Across the Entire Range
- User Programmable Display -19999 to 19999
- ZERO and SPAN Adjustment through Software

Specifications

■ Display Type	0.56" / 14.2mm Red LED Super Bright Display	■ Response Time	250ms
■ Maximum Display	4½ Digit / 19999 (Max.) Counts	■ Polarity Indication	Yes
■ Display Stability	Within ±2 Digit	■ Environmental Conditions	0°C to + 55°C, < 70% RH (Operation) -10°C to + 70°C, < 70% RH (Storage) 27°C ±5°C (Calibration)
■ Resolution	0.0001 to 1 Count Depending on Range / Scale Display	■ Dielectric Strength	2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
■ Over Load Indication	"-OL-"	■ Impulse Withstand	3.5KV, 1.2 / 50 Micro Second
■ Under Load Indication	"-UL-"	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Sampling Rate	3 Samples / Second	■ Faceplate / Lens	Red Antiglare Face plate with Annunciators
■ Maximum Overload	Voltage : 1.2 Times Continuous Current : 1.2 Times Continuous	■ Connectors / Terminal	Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal
■ Auxiliary Supply	85 - 265V AC / DC (Standard) 19 - 90V AC / DC (Optional) 24 & 48V DC (Optional)	■ Mounting Clamps	Sturdy, Moulded ABS with Suitable Hardware
■ VA Burden (Typical)	Auxiliary : ≤ 1.5VA Voltage Input : ≤ 1.0VA Current Input : ≤ 1.0VA		

Model	Input		Range	Programmable Display Key (inside facia)	Aux Supply (Any One Only)	Accuracy
SMP45SW / SMP9645SW	DC	mA	4 - 20	✓	85-265V AC/DC @ 50/60Hz (Standard) OR 19-90V AC/DC @ 50/60Hz (Optional) OR 24V & 48V DC (Optional)	±0.5% of FSD
			-20 / 0 / 20	✓		
			0 - 20	✓		
	V		-10 / 0 / 10	✓		
			0 - 10	✓		


Ordering Information : Model, Input Range, Scale Display, Annunciator & Auxiliary Supply

Standard : As per IS 13875

Annunciators

°C	rpm	Hz	pH	kmph	db	mmhg	N/m ²	MPM	sph	x100	Ft/s	°F	rad
%	mm	kg	MW	kvar	cosφ	psi	bar	CPS	Rev/s	m ³ /min	Ltr/hr	TON	Lux

Terminal Connection

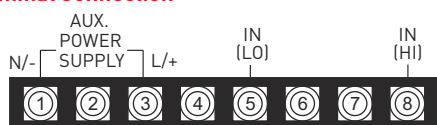

SMP45SW / SMP9645SW

Dimensions (mm)

Model	SMP45SW	SMP9645SW
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)



TRPI-48
4-20mA / 0-20mA / 0-10V



TRPI-48 (IP-65)
4-20mA / 0-20mA / 0-10V



TRPI-48 (IP-65)
[Mounting & Protection]

General Description

MECO 4 Digit Triple Range Programmable Process Indicator having three input ranges in the same meter. These input ranges are programmable by the user. The display from -1999 to 9999 is also User Programmable. Thus the user has a wide choice of inputs and displays which makes this meter truly flexible and versatile for applications in Process Industry, Automation, Refinery Plants, Variable Drives, Process Equipment etc.

Features

- IP-65 Protection on Front (Optional)
- 3 Input Ranges in One Meter (User Programmable)
- Decimal Point : Selectable
- 9999 Count (Max.) High Resolution Display
- User Programmable Display -1999 to 9999
- Zero & Span Adjustment through Software
- High Accuracy Across the Entire Range

Specifications

- | | | | |
|-------------------------------|--|-----------------------------------|--|
| ■ Maximum Display | 0.56" / 14.2mm 4 Digit, 9999 (Max), 7 Segment 0.56" LED Display | ■ VA Burden | Auxillary : ≤ 1.5VA
Voltage Input : ≤ 0.5VA
Current Input : ≤ 0.5VA |
| ■ Input Signal | 4 - 20mA DC, 0 - 20mA DC & 0 - 10V DC (User Programmable) | ■ Environmental Conditions | 0 to 55°C, <70% RH (Operation)
-10 to 70°C, <70% RH (Storage)
27°C ± 5°C (Calibration) |
| ■ Display Range | -1999 To 9999 [Scale Display can be set from -1999 to 9999] | ■ Dielectric Strength | 2.5KV @ 50Hz for 1 minute between Input-Auxiliary & Case-Terminals |
| ■ Display Stability | Within ± 2 Digits | ■ Impulse Withstand | 3.5kV, 1.2 / 50μ seconds |
| ■ Resolution | 0.001 - 1 Count depending on Range / Scale Display | ■ Case / Housing Material | Black Polycarbonate, Dimension as per DIN 43700 / Refer Below Table |
| ■ Overload Indication | -OL- | ■ Connectors | Terminal Block : Nylon 66, 33% G/F, Black (UL 94V - 0) with Tin Plated Brass Terminals |
| ■ Underload Indication | -UL- (for 4-20mA DC only) | ■ Faceplate / Lens | Red Transparent Polycarbonate Antiglare Faceplate with Annunciators |
| ■ Sampling Rate | 3 Samples / Second | ■ IP-65 Cover | Polycarbonate [TRPI-48 (IP-65)] |
| ■ Response Time | 250ms | ■ Gasket | EPDM Rubber [TRPI-48 (IP-65)] |
| ■ Maximum Overload | Voltage : 1.2 Times Continuous
Current : 1.2 Times Continuous | | |
| ■ Mounting Clamps | Sturdy, Moulded Polyacetal [TRPI-48] & Polycarbonate [TRPI-48 (IP-65)], with Suitable Hardware | | |

Model	Input	Triple Range (User Programmable)	Programmable Display Key	Aux Supply (Any One Only)	Accuracy
TRPI-48 / TRPI-48 (IP-65)	DC	4 - 20mA, 0 - 20mA & 0 - 10V	✓	85-265V AC / DC (Standard) OR 24V & 48V DC (Optional)	± 0.5% of FSD

Ordering Information : Model, Input Range, Auxiliary Supply, Scale Display & IP-65 Protection (Optional)

Note : Default Input Range and Default Scale Display is 4 - 20mA DC.

Standard : As per IS 13875 & IS / IEC 60529 : 2001 (RA 2019)

Terminal Connection



Dimensions (mm)


Models	TRPI-48	TRPI-48 (IP-65)
Front	48 x 96	54.5 x 102.5
Depth (Behind Bezel)	59	59
Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)



DPI-72x14445SN



DPI-72x14445SN



DPI-14445SN

Features

- High Accuracy Across the Entire Range
- User Programmable Display -19999 to 19999 (adjustable)
- ZERO and SPAN Adjustment through Software
- 19999 Count (Max) High Resolution Display
- Decimal Point : Selectable
- RS485 Port, 5KV Isolated with Modbus RTU Protocol (Optional)

Specifications

■ Display Type	1" / 25.4mm Red LED Super Bright Display	■ Polarity Indication	Yes
■ Maximum Display	4½ Digit / 19999 (Max.) Counts	■ VA Burden (Typical)	Auxiliary : ≤ 1.5VA Voltage Input : ≤ 1.0VA Current Input : ≤ 1.0VA
■ Display Stability	Within ±2 Digit	■ Environmental Conditions	0°C to + 55°C, < 70% RH (Operation) -10°C to + 70°C, < 70% RH (Storage) 27°C ±5°C (Calibration)
■ Resolution	0.0001 to 1 Count Depending on Range / Scale Display	■ Dielectric Strength	2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
■ Over Load Indication	"-OL-"	■ Impulse Withstand	3.5KV, 1.2 / 50 Micro Second
■ Under Load Indication	"-UL-"	■ Case / Housing Material	Polycarbonate, Black
■ Sampling Rate	3 Samples / Second	■ Faceplate / Lens	Polycarbonate Transparent Red
■ Response Time	250ms	■ Mounting Clamps	Sturdy, Moulded Derlin with Suitable Hardware
■ Maximum Overload	Voltage : 1.2 Times Continuous Current : 1.2 Times Continuous	■ Connectors / Terminal	Nylon 66, 33% GF, Black / Brass
■ Auxiliary Supply	85 - 265V AC / DC (Standard) 19 - 90V AC / DC (Optional)		


Model	Input	Range (Any One Only)	Programmable Display Key (inside facia)	Aux Supply (Any One Only)	Accuracy
DPI-72x14445SN / DPI-14445SN	DC	mA	4 - 20	85-265V AC/DC @ 50/60Hz OR 19-90V AC/DC @ 50/60Hz	±0.5% of FSD
			-20 / 0 / 20		
			0 - 20		
	V		-10 / 0 / 10		
			0 - 10		

Ordering Information : Model, Input Range, Scale Display, Annunciator, Auxiliary Supply & RS 485 Modbus Communication (Optional).

Annunciators

°C	rpm	Hz	pH	kmph	db	mmhg	N/m ²	MPM	sph	x100	Ft/s	°F	rad
%	mm	kg	MW	kvar	cosφ	psi	bar	CPS	Rev/s	m ³ /min	Ltr/hr	TON	Lux

Terminal Connection

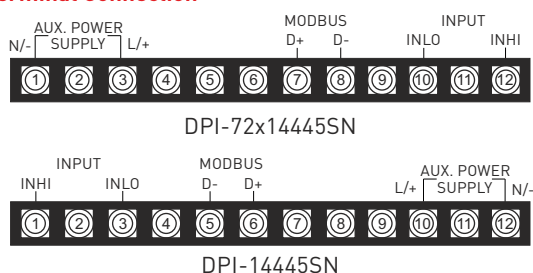

Standard : As per IS 13875

Dimensions (mm)	DPI-72x14445SN	DPI-14445SN
Front	72 x 144	144 x 144
Depth (Behind Bezel)	93	72
Panel Cut-Out	68 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)	138 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)



**SMP72x14445SN
Voltmeter - TRMS**



**SMP72x14445SN
Voltmeter - DC**



**SMP14445SN
Voltmeter - DC**

Features


- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 19999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point
- RS485 Port, 5KV Isolated with Modbus RTU Protocol (Optional)

Specifications

■ Measuring Method	TRMS Using Microcontroller	■ Polarity Indication	"-" is Indicated for Negative Input
■ Display Type	1" / 25.4mm Red LED Super Bright Display	■ VA Burden (Typical)	Auxiliary : $\leq 1.5VA$ Voltage Input : $\leq 1VA$ Current Input : $< 0.5VA$
■ Maximum Display	4½ Digit / 19999 (Max.) Counts	■ Environmental Conditions	0°C to + 55°C, < 70% RH (Operation) -10°C to + 70°C, < 70% RH (Storage) 27°C $\pm 5^\circ C$ (Calibration)
■ Display Stability	Within ± 2 Digit	■ Dielectric Strength	2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
■ Resolution	0.0001 to 1 Count Depending on Range / Scale Display	■ Impulse Withstand	3.5KV, 1.2 / 50 Micro Second
■ Over Load Indication	"-OL-"	■ Case / Housing Material	Polycarbonate, Black
■ Under Load Indication	NA	■ Faceplate / Lens	Polycarbonate Transparent Red
■ Sampling Rate	3 Samples / Second	■ Connectors / Terminal	Nylon 66, 33% GF, Black / Brass
■ Response Time	250ms	■ Mounting Clamps	Sturdy, Moulded Derlin with Suitable Hardware
■ Maximum Overload	Voltage : 1.2 Times Continuous Current : 1.2 Times Continuous		
■ Frequency Response	40 - 400Hz		

Model	Input		Range	Programmable Display Key	4½ Digit	5 Digit	Aux Supply (Any One Only)	Accuracy	
SMP72x14445SN / SMP14445SN	DC	mV	0 - 75 (Shunt Operated)	✓[*]	✓	-	85-265V AC / DC @ 50 / 60Hz (Standard) OR 19-90V AC/DC @ 50 / 60Hz (Optional)	± 0.5% of FSD	
			0 - 200	-	✓	-			
		V	0 - 2, 20, 200	-	✓	-			
			0 - 1000	-	✓	-			
			mA	0 - 2, 20, 200	-	✓			-
			A	0 - 2, 5	-	✓			-
	AC	V	0 - 110 (PT Operated)	✓[#]	-	✓			
			0 - 2, 20, 200, 750	-	✓	-			
		I	0 - 1 (CT Operated)	✓[*]	-	✓			
			0 - 5 (CT Operated)	✓[*]	-	✓			

Standard : As per IS 13875

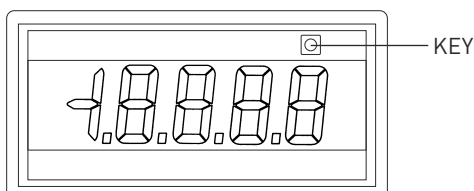

For Setting CTP / Shunt / PTR

- Power on DPM
- Remove Front Facia
- Press Key on Display Card once
- Meter will Show Present Set Display Value
- Press-Release until the Desired Value is Displayed









1	1	0.1100	5	30	3.3000	9	300	33.000	13	2000	220.00
2	3.77	0.4150	6	60	6.6000	10	600	66.000	14	4000	440.00
3	4	0.4400	7	100	11.000	11	1000	110.00	-	-	-
4	20	2.2000	8	200	22.000	12	1200	132.00	-	-	-

1	30	80	250	600	1500	5000	10000
5	40	100	300	700	1600	6000	12000
10	50	125	350	750	2000	7000	15000
15	60	150	400	800	2500	7500	20000
20	70	175	450	1000	3000	8000	-
25	75	200	500	1200	4000	9000	-

Front	72 x 144	144 x 144
Depth (Behind Bezel)	93	72
Panel Cut-Out	68 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)	138 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)

Ordering Information : Model, Input Range, CTR / PTR / SHUNT (if any), Scale Display, Auxiliary Supply & RS 485 Modbus Communication (Optional).

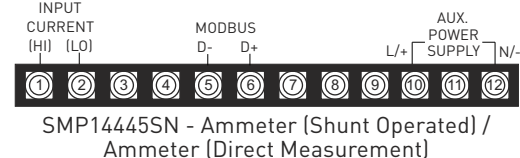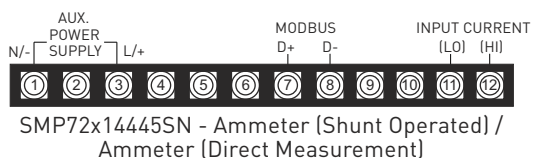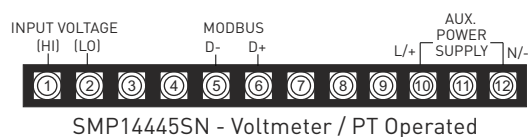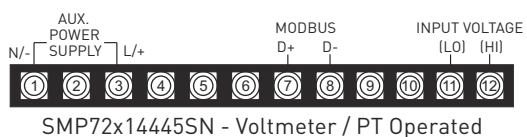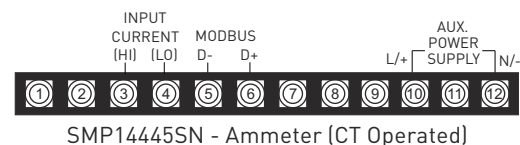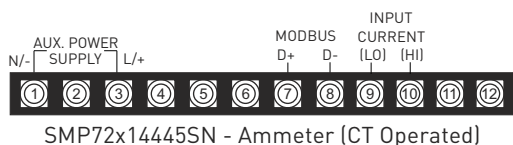



FDM964SD



SMP9635SWD



SMP14445SND



FDM1444SAD, FDM1444SBD

Specifications

- | | |
|--|--|
| <ul style="list-style-type: none"> Measuring Method Dual Slope A/D Conversion (Voltmeter) Interval Measurement Method using Microcontroller (Frequency Meter) Display Type Red LED Super Bright Display Maximum Display 19999 Counts (Voltmeter) 9999 Counts (Frequency Meter) Display Stability Within ± 2 Digits Maximum Overload Voltage : 1.2 times continuous Current : 2 times continuous Dielectric Strength 2.5 kV at 50Hz for 1 min. between Input - Auxiliary Case - Terminals Frequency Response 40 - 400Hz (Voltmeter) | <ul style="list-style-type: none"> Case / Housing Material DIN Black ABS, Dimension as per DIN 43700 VA Burden (Typical) Per Display Auxiliary : < 5VA Voltage Input : < 0.1VA Current Input : < 0.5VA Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70% Environmental Conditions Sturdy, Moulded ABS with Hardware Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals Mounting Clamps Connectors Faceplate / Lens Red Antiglare Faceplate with Annunciators |
|--|--|

Model	Input 1 Input 2		Range	Auxiliary Power Supply (Any One Only)	Accuracy Class	Digits (max.)		Display Digit Height	
						3½	4½	0.56"/14.2mm	1.0"/25.4mm
SMP14445SND	DC	Zero Supp.	4 - 20mA	85-265V AC/DC (Standard) OR 19-90V AC/DC (Optional)	0.5	-	✓	-	✓
	AC	V	0 - 20, 200, 750V			-	✓	-	✓
		I	0 - 1, 2, 5A			-	✓	-	✓
SMP9635SWD	AC	V	0 - 2, 20, 200, 750V			✓	-	✓	-
		I	0 - 1, 2, 5, 20A			✓	-	✓	-
	DC	Zero Supp.	4 - 20mA			✓	-	✓	-
		I	0 - 1, 2, 5, 20A			✓	-	✓	-

Model	Input 1 Input 2		Auxiliary Power Supply (Any One Only)				Accuracy Class			Display Digit Height	
			85-265V AC/DC	110 / 230V AC	24 / 48 / 110 / 220V DC	Self Powered	±0.1 Hz	±0.5 Hz	±2.0 Hz	0.56" / 14.20mm	1.0" / 25.4mm
FDM1444SAD	40 - 99.99Hz	@20 - 500V AC	-	✓	-	✓	✓	-	-	-	✓
FDM1444SBD			-	-	✓	-	✓	-	-	-	✓
FDM964SD	40 - 99.99Hz		✓	✓	-	✓	✓	✓	-	✓	-
	40 - 5000Hz		✓	✓	-	✓	-	-	✓	✓	-

Note : For Self Powered Input variation is ±20% of Aux.


Standard : As per IS 13875

Dimensions (mm)

Model	SMP9635SWD	FDM964SD	SMP14445SND	FDM1444SAD FDM1444SBD
Front	96 x 96	96 x 96	144 x 144	144 x 144
Depth (Behind Bezel)	90	90	93	93
Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	138 (+0.8, -0.0) x 138 (+0.8, -0.0)	138 (+0.8, -0.0) x 138 (+0.8, -0.0)

Ordering Information : Model, Input Range, PTR/CTR (if any), Scale Display, Auxillary Supply & Accuracy Class

Terminal Connection

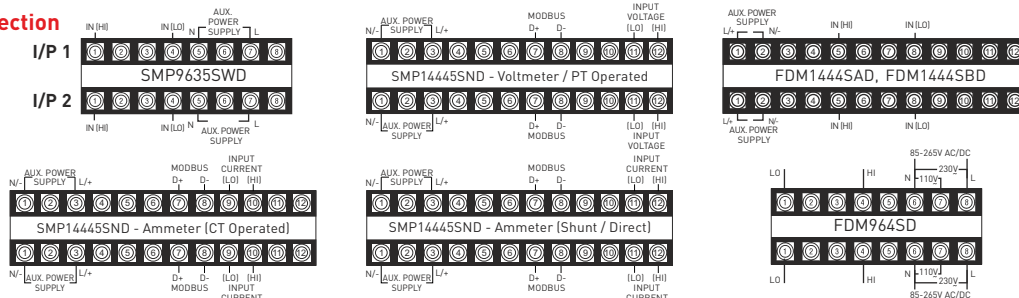



SMP72x14445S, SMP72x14445ST



SMP96x28845

Specifications

■ Measuring Method	Dual Slope A/D Conversion	■ Crest Factor	4 (max.) TRMS accuracy specified for sine wave input
■ Sampling Rate	2.5 Samples per Second	■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators
■ Display Type	Red LED Super Bright Display	■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Maximum Display	4½ Digit / 19999 Counts (Max.)	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Input - Auxiliary - Case - Terminals
■ Resolution	0.0001 to 1 Count depending on the range	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Polarity Indication	" - " is indicated for negative input	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Decimal Selection	Field Selectable	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Over Range Indication	"0000" blinking	■ Display Stability	Within ± 2 Digits
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		
■ VA Burden (Typical)	Auxiliary : < 2.5VA Voltage Input : < 1.0VA Current Input : < 1.0VA		
■ Frequency Response	40 - 400Hz		

SMP72x14445S / SMP96x28845S SMP72x14445	DC	mV	0 - 200	230V AC ±10% @ 50Hz	85-265V AC/DC @ 50/60Hz (Standard) OR 19-90V AC/DC @ 50/60Hz (Optional)	✓	✓	✓	✓
		V	0 - 2, 20, 200			✓	✓	✓	✓
		V	0 - 1000			✓	✓	✓	✓
		mA	0 - 2, 20, 200			✓	✓	✓	✓
		A	0 - 1, 2, 5			✓	✓	✓	✓
	AC	V	0 - 2, 20, 200, 750			✓	✓	✓	✓
		A	0 - 1, 2, 5			✓	✓	✓	✓
SMP72x14445ST	AC TRMS	V	0 - 2, 20, 200, 750			-	✓	✓	✓
		A	0 - 1, 2, 5			-	✓	✓	✓

Ordering Information: Model, Input Range, CTR / PTR (if any), Scale Display, Data Hold (Optional), Auxiliary Supply & Accuracy Class
Standard : As per IS 13875

Front	72 x 144	72 x 144	96 x 288
Depth (Behind Bezel)	93	130	77
Panel Cut-Out	68 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)		92 ^(+0.8, -0.0) x 282 ^(+0.8, -0.0)


Terminal Connection




SMP72x14445S / SMP72x14445ST



SMP96x28845



SMP9635AS



SMP9635VS33



SMP9635VS34




Model	Input	Range	Aux. Power Supply (Any One Only)	Accuracy		Digit Max.	Display Digit Height
				0.5	1		
SMP9635AS	A - 3 Phase	1A or 5A (any one only)	230V AC \pm 10% @ 50/60Hz (Standard) OR 110/220V DC \pm 10% [Optional]	✓	✓	✓	✓
SMP9635VS33	V - 3 Phase 3 WIRE	500V AC		✓	✓	✓	✓
SMP9635VS34	V - 3 Phase 4 WIRE	500V AC		✓	✓	✓	✓

Dimensions (mm)

Model	SMP9635AS / SMP9635VS33 / SMP9635VS34
Front	96 x 96
Depth (Behind Bezel)	135
Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)

Model, Input Range, CTR / PTR (if any), Scale Display, Auxiliary Supply, Accuracy Class & Display Digit Height

Terminal Connection

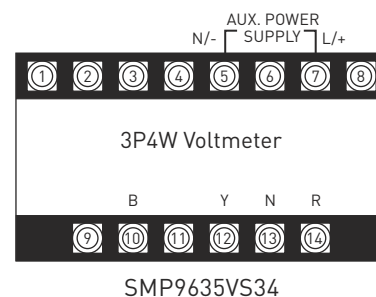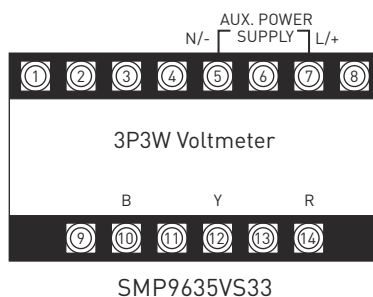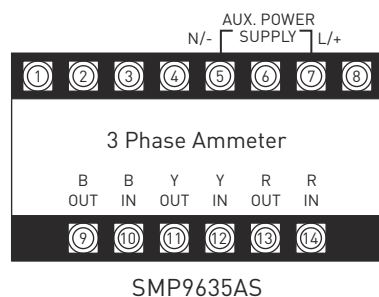





SMP35ASN - Ammeter



SMP35VSN - Voltmeter



SMP9635ASN - Ammeter



SMP9635VSN - Voltmeter

Features

- 1A / 5A Input in same Meter (User Selectable)
- High Accuracy Across the Entire Range
- 9999 Count High Resolution Display
- Auto / Manual Scroll Display (User Selectable)
- 3P3W / 3P4W (User Selectable)
- LED Indication for R, Y, B, RY, YB, BR
- User Programmable Display / CTP / PTR
- Auto Selection of Decimal Point
- Auto Indication of KV & KA
- Setup / Programming Protected by Password

Specifications

- **Measuring Method** TRMS using Microcontroller
- **Display Type** 0.56" / 14.2mm Red LED Super Bright Display
- **Maximum Display** 4 Digit / 9999 Counts
- **Display Stability** Within ± 2 Digits
- **Overload / Underload** - OL - / - UL - Indication
- **Resolution** 0.001 to 1 Count Depending on Range
- **Sampling Rate** 3 Samples / Second
- **Maximum Overload** Voltage : 1.2 times continuous
Current : 2 times continuous
- **VA Burden (Typical)** Auxiliary : $\leq 2\text{VA}$ / Phase
Voltage Input : $\leq 1.0\text{VA}$ / Phase
Current Input : $\leq 1.0\text{VA}$ / Phase
- **Frequency Response** 45 - 65Hz
- **Environmental Conditions** 0 to 55°C, < 70% RH (Operation)
-10 to 70°C, < 70% RH (Storage)
27°C \pm 5 °C (Calibration)
- **Dielectric Strength** 2.5 kV at 50Hz for 1 min. between Input - Auxiliary & Case - Terminals
- **Impulse Withstand** 3.5kV, 1.2 / 50 μ s
- **Case / Housing Material** Black ABS, Dimension as per DIN 43700
- **Connectors** Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Faceplate / Lens** Red Antiglare Faceplate with Annunciators
- **Mounting Clamps** Sturdy, Derline (Engineering plastic)

	V	51 - 300V AC (PH-N) 88 - 519V AC (PH-PH)	1 - 9999	85-265V AC/DC OR 19-90V AC/DC (Optional)	\pm (0.5% FSD + 2 Digits)
	A	For 1A Range : 0.080 - 1.200A AC For 5A Range : 0.200 - 6.000A AC	1 - 9999 1 - 9999		




Dimensions (mm)

Model	SMP35VSN / SMP35ASN	SMP9635VSN / SMP9635ASN
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	44 (+0.5, -0.0) x 92 (+0.8, -0.0)	92 (+0.8, -0.0) x 92 (+0.8, -0.0)

Ordering Information : Model and Aux. Supply.

Standard : As per IS 13875

Terminal Connection





FDM3A / FDM3B

Specification

■ Measuring Method	3 Digit - Digital Circuit	■ Dielectric Strength	2.5kV at 50Hz for 1 Min. between Input - Auxiliary and Case - Terminals
■ Gate Time	1 Second	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Display Type	14.2mm/0.56" digit height, Red LED (standard)	■ Bezel	Snap-Fit, Black ABS, Dimensionas per DIN 43718
■ Maximum Display	999 counts for 3 Digit Meters	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Resolution	0.1 to 1 count for 3 Digit depending in the range	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Decimal Selection	Factory Set	■ Faceplate / Lens	RED Antiglare Faceplate with Annunciators
■ Maximum Overload	Voltage : 1.2 times continuous		
■ Time Base	32.768kHz for 3 digit meters		
■ VA Burden (Typical)	Aux. : <4.5 VA Voltage Input : <0.5VA,		
■ Environment Conditions	0 to 50°C, <70% RH (Operation) -10 to 70°C, <70% RH (Storage)		

Model	Input		Aux. Power Supply (Any One Only)		Accuracy	
			230V AC $\pm 10\%$	Self (#) Powered	± 0.1 Hz	± 1.0 Hz
FDM3A	40 - 99.9Hz	110V AC OR 230V AC (Any One Only)	-	✓	✓	-
FDM3B	0 - 99.9 Hz	10 ~ 500V AC	✓	-	✓	-
	0 - 999Hz		✓	-	-	✓

Note : For (#) Self Powered Meters input Variation is $\pm 20\%$ of Aux.

Dimensions (mm)	
Model	FDM3A / FDM3B
Front	48 x 96
Depth (Behind Bezel)	135
Panel Cut-Out	44 (+0.5, -0.0) x 92 (+0.8, -0.0)

Ordering Information : Model, Input Range, CTR / PTR (if any), Scale Display, Auxillary Supply & Optionals

Terminal Connection



FDM3A




FDM3B



FDM4S



RPM4AS (48x96)
RPM964AS (96x96)



FDM964S



FDM72x1444SA
FDM72x1444SB



FDM1444SA
FDM1444SB

Specifications

■ Measuring Method	Interval Measurement Method using Microcontroller	■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Display Type	Red LED (Standard)	■ Dielectric Strength	2.5 kV at 50 Hz for 1 min. between Input - Auxiliary - Case - Terminals
■ Maximum Display	9999 Counts for 4 Digit Meters	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Display Stability	Within ± 2 Digits	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Resolution	0.01 to 1 for 4 Digit depending on range 1 RPM for RPM Meter	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Decimal Selection	Auto (FDM4S & FDM964S) / Factory Set (For Others)	■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators
■ Maximum Overload	Voltage : 1.2 times continuous		
■ VA Burden (Typical)	Auxiliary : < 4.5 VA Voltage Input : < 0.5VA		

Model	Input	Auxiliary Power Supply (Any One Only)				Accuracy Class			Display Digit Height	
		85-265V AC/DC	110 / 230V AC	24 / 48 / 110 / 220V DC	Self (#) Powered	± 0.1 Hz	± 0.5 Hz	± 2.0 Hz	0.56" / 14.20mm	1.0" / 25.4mm
FDM4S / FDM964S	40 - 99.99Hz	✓	✓	-	✓	✓	✓	-	✓	-
	40 - 5000Hz (Auto Ranging)	✓	✓	-	✓	-	-	✓	✓	-
FDM1444SA	40 - 99.99Hz	-	✓	-	✓	✓	✓	-	-	✓
FDM1444SB		-	-	✓	-	✓	✓	-	-	✓
FDM72x1444SA		-	✓	-	✓	✓	✓	-	-	✓
FDM72x1444SB		-	-	✓	-	✓	✓	-	-	✓
RPM4AS / RPM964AS	300 - 1500RPM for 10 - 50Hz	✓	✓	-	✓	-	✓	-	✓	-

Note : For (#) Self Powered Meters Input Variation is ±20% of Aux.


Dimensions (mm)

Model	FDM4S RPM4AS	FDM964S RPM964AS	FDM72X1444SA FDM72X1444SB	FDM1444SA FDM1444SB
Front	48 x 96	96 x 96	72 x 144	144 x 144
Depth (Behind Bezel)	88	90	93	72
Panel Cut-Out	44 (+0.5, -0.0) x 92 (+0.8, -0.0)	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	68 (+0.8, -0.0) x 138 (+0.8, -0.0)	138 (+0.8, -0.0) x 138 (+0.8, -0.0)

Ordering Information: Model, Input Frequency Range / RPM Range (for RPM Meter), Input Voltage, Auxiliary Supply & Accuracy Class

Standard : As per IS 13875

Terminal Connection

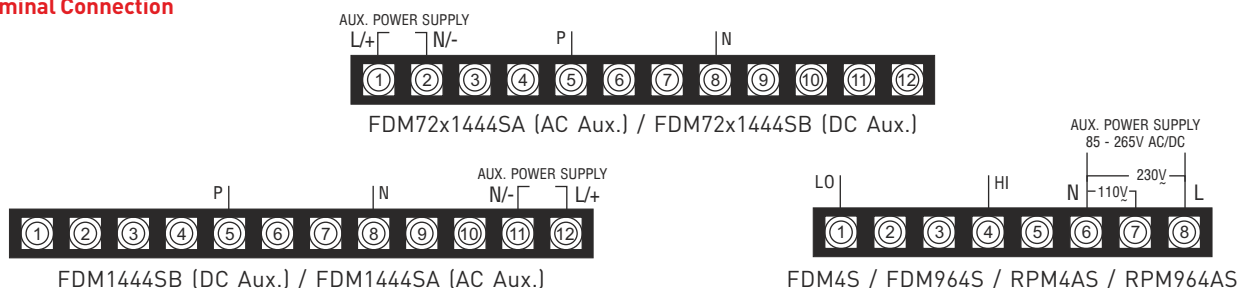



DPF9611S, DPF9631S



DPF72x14411, DPF72x14431



DPF14411, DPF14431

Specifications

■ Measuring Method	Cosine of Phase Shift between Voltage and Current	■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous
■ Sampling Rate	2.5 Samples per Second	■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Display Type	Red LED (Standard)	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Case - Terminals
■ Maximum Display	4 Digits to indicate PF	■ Mounting Clamps	Sturdy, Moulded ABS with Hardware
■ Resolution	0.001 PF	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Under Current Indication	Error Code ".01 " Blinking when current < 20% of Nominal is detected	■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators
■ Polarity Indication	L (Lagging/Inductive) or C (Leading/Capacitive)	■ Display Stability	Within ± 2 Digits
■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700		
■ VA Burden (Typical)	Auxiliary : < 5 VA Voltage Input : < 1.0VA / Phase Current Input : < 1.0VA / Phase		


Model	System (Phase, Element, Wire)	Input (Nominal)	Auxiliary Power Supply (Any One Only)				Accuracy Class ± 1 Degree	Display Digit Height	
			85-265V AC/DC	110 / 230V AC	24 / 48 / 110 / 220V DC	Self Powered		0.56" / 14.20mm	1.0" / 25.4mm
DPF9611S	1P 1E 2W	V for 1P1E2W = 110 / 230 V (P-N); V for 3P1E2W = 110 / 440 V (P-P); A = 1, 2 or 5A AC; Hz = 50Hz (V Range = ± 20% of Nominal A Range = 20 - 120% of Nominal) PF Range = 0.500 Lag (L) - 1 - 0.500 Lead (C)	✓	✓	✓	✓	✓	✓	-
DPF9631S	3P 1E 2W (Balanced Load)		✓	✓	✓	✓	✓	✓	-
*DPF72x14411 *DPF14411	1P 1E 2W		-	✓	✓	✓	✓	-	✓
*DPF72x14431 *DPF14431	3P 1E 2W (Balanced Load)		-	✓	✓	✓	✓	-	✓

Dimensions (mm)


Model	DPF9611S / DPF9631S	DPF72x14411 / DPF72x14431	DPF14411 / DPF14431
Front	96 x 96	72 x 144	144 x 144
Depth (Behind Bezel)	90	130	59
Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	68 (+0.8, -0.0) x 138 (+0.8, -0.0)	138 (+0.8, -0.0) x 138 (+0.8, -0.0)

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Auxillary Supply & Display Digit Height
Standard: As per IS 13875

Terminal Connection

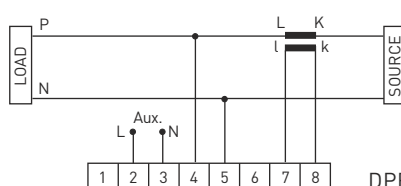

DPF9611S

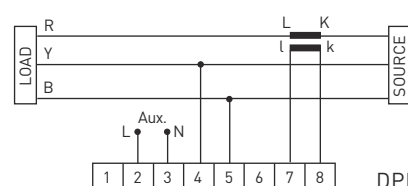

DPF9631S

*Note :

For Terminal Connection of DPF72x14411, DPF14411, DPF72x14431, DPF14431 Please Refer Page of Digital Wattmeter / Varmeter (with Built-In Transducer) - Connection Diagram 49



DWM96



DVM96

Specifications

■ Measuring Method	Multiplication of Pulse Width and Pulse Height	■ Over Range	" 1 " or " -1 "
■ Sampling Rate	2.5 Samples per Second	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Case - Terminals
■ Display Type	Red LED (Standard)	■ Polarity Indication	" - " is Displayed to indicate Export of Power
■ Resolution	0.001 to 1 depending on range for 3½ digit 0.0001 to 1 depending on range for 4½ digit	■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous	■ Note	Digital Watt /Var Meters with External Transducer Against Inquiry
■ VA Burden (Typical)	Auxiliary : < 5VA Voltage Input : < 0.5VA, < 5VA for R Phase in Self Powered Current Input : < 0.5 VA / Phase	■ Display Stability	Within ± 2 Digits
■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%	■ Case/Housing Material	DIN Black ABS, Dimension as per DIN 43700
		■ Mounting Clamps	Sturdy, Moulded Derlin with suitable Hardware
		■ Connectors	Detachable Connectors


Model	Input (Nominal) A = 1, 2 or 5A AC PF 0.3 Lag - 1 - 0.3 Lead Hz = 50Hz			Auxiliary Power Supply (Any One Only)		Accuracy Class		Digits (max.)	Bi Directional		Display Digit Height
				110 / 230V AC	Self Powered	0.5	1.0		Input	Display	
DWM963511 DVM963511	1P 1E 2W	V Range = ± 20% of Nominal A Range = 20 - 120% of Nominal For 1P1E2W : 63.5 / 110 / 230 V (P-N); For 3P1E2W : 110 / 440 V (P-P); For 3P2E3W : 110 / 440 V (P-P)		✓	✓	✓	✓	✓	✓	✓	✓
DWM963531 DVM963531	3P 1E 2W (Balanced Load)										
DWM963533 DVM963533	3P 2E 3W (Balanced & Unbalanced Load)										

Dimensions (mm)


Model	DWM9635 / DVM9635
Front	96 x 96
Depth (Behind Bezel)	135
Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Scale Display, Auxillary Supply, Accuracy Class, Digits, Uni or Bi-Directional Input & Display Digit Height


Terminal Connection




DWM9611, DVM9611




DWM9631, DVM9631




* DPF72x14411



* DPF72x14431



* DPF14411



* DPF14431



**SMPW35SW,
SMPV35SW**



**SMPW9635SW,
SMPV9635SW**



**SMPW72x14445SN,
SMPV72x14445SN**



**SMPW14445SN,
SMPV14445SN**

Specifications


MECO 1-Phase & 3-Phase Digital Watt / Var Meters (with External Transducer) are available in Sizes 48 x 96 / 96 x 96 / 72 x 144 / 144 x 144mm etc. with choice of AC / DC Aux. Supply and Display of Digit Height 0.56 / 1 / 2.3 inches. For detailed specifications, please refer catalog of Digital Panel Meters and respective pages of DIN Transducers. Below are listed some of the more popular Models. However several other types of V, A, W, Var, PF, Hz etc. meters with External Transducers are also available.

Display / Digits (max.)		3½ Digits, 1999 Counts		4½ Digits, 19999 Counts	
Display Height		14.2mm / 0.56"		25.4mm / 1"	
Type	System	48 x 96mm	96 x 96mm	72 x 144mm	144 x 144mm
Watt Meter	1P1E2W	SMPW3511SW	SMPW963511SW	SMPW72x1444511SN	SMPW1444511SN
	3P1E2W	SMPW3531SW	SMPW963531SW	SMPW72x1444531SN	SMPW1444531SN
	3P2E3W	SMPW3533SW	SMPW963533SW	SMPW72x1444533SN	SMPW1444533SN
	3P3E4W	SMPW3534SW	SMPW963534SW	SMPW72x1444534SN	SMPW1444534SN
Var Meter	1P1E2W	SMPV3511SW	SMPV963511SW	SMPV72x1444511SN	SMPV1444511SN
	3P1E2W	SMPV3531SW	SMPV963531SW	SMPV72x1444531SN	SMPV1444531SN
	3P2E3W	SMPV3533SW	SMPV963533SW	SMPV72x1444533SN	SMPV1444533SN
	3P3E4W	SMPV3534SW	SMPV963534SW	SMPV72x1444534SN	SMPV1444534SN
V (Any One)	Nominal Input	For 1P1E2W : 63.5 / 230 V (P-N); For 3P1E2W : 110 / 440 V (P-P); For 3P2E3W / 3P3E4W : 110 / 440 V (P-P)			
	Range	20 - 120% of Nominal			
A (Any One)	Nominal Input	1, 2, or 5A AC (also 10A AC for 1 Phase)			
	Range	5 - 120% of Nominal			
Hz		Standard : 50Hz, Optional : 60Hz			
PF		Standard Range : 0.3 Lag - 1 - 0.3 Lead			
Auxiliary Power Supply		48 x 96mm, 96 x 96mm, 85-265V AC/DC (Standard) OR 19-90V AC/DC (Optional)		72x14445SN / 144x144SN 85-265V AC/DC (Standard) OR 19-90V AC/DC (Optional)	
Accuracy (Calibrated at 27°C ±5°C)		±[0.5% of Full Scale + 2 Digits]			

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Scale Display, Auxillary Supply, Accuracy Class, Digits, Uni or Bi Directional & Display Digit Height.

Dimensions (mm)

Model	SMPW14445SN SMPV14445SN	SMPW9635SW SMPV9635SW	SMPW35SW SMPV35SW	SMPW72x14445SN SMPV72x14445SN
Front	144 x 144	96 x 96	48 x 96	72 x 144
Depth (Behind Bezel)	72	90	88	93
Panel Cut-Out	138 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)	68 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)
External Transducer (approx.)	As per DIN Series Transducers			




DWM96534S
DVM96534S



DWM72x144533-TRMS
DWM72x144534-TRMS



DPF72x144433-TRMS
DPF72x144434-TRMS



DWM144533-TRMS
DWM144534-TRMS

Features :

- TRMS Measurement
- 1"/25.4mm Digit Height Display
- 0.56"/14.2mm Digit Height Display
- 5 Digits 99999 Counts (Max.), Super Bright Display
- 3 Phase 3 Wire / 3 Phase 4 Wire System
- CE Compliance with EN61010-1, EN61326-1
- Stable & Accurate
- " -VE " is Displayed to Indicate Export of Power
- Auto Indication of K & M for Kilo & Mega Respectively
- Auto Selection of Decimal Point
- RS485 Port, 4KV Isolated with Modbus RTU Protocol (Optional)

Model	Parameter Measured (System)	Accuracy \pm (%FS + 3 Digit)
DWM96534S-TRMS	3 Phase Active Power	$\pm 0.5\%$
DVM96534S-TRMS	3 Phase Reactive Power	$\pm 1.0\%$
DWM72x144533-TRMS/DWM72x144534-TRMS	3 Phase Active Power	$\pm 0.5\%$
DVM72x144533-TRMS/DVM72x144534-TRMS	3 Phase Reactive Power	$\pm 1.0\%$
DVAM72x144533-TRMS/DVAM72x144534-TRMS	3 Phase Apparent Power	$\pm 0.5\%$
DPF72x144433-TRMS/DPF72x144434-TRMS	3 Phase Power Factor	$\pm 1^\circ$ Electrical
DWM144533-TRMS/DWM144534-TRMS	3 Phase Active Power	$\pm 0.5\%$
DVM144533-TRMS/DVM144534-TRMS	3 Phase Reactive Power	$\pm 1.0\%$


Specifications


Auxiliary Supply	85 - 265VAC / DC (Standard) 19 - 90VAC / DC (Optional)	Current I/P	<0.2VA / Phase
Voltage / Phase PT Ratio : 1-2500 (Max.)	190V - 290VAC (Max.) (PH-N) 50.8V - 96.2VAC (Max.) (PH-N) 330V - 500VAC (Max.) (PH-PH) 88V - 132VAC (Max.) (PH-PH)	System	3P2E3W / 3P3E4W
Current / Phase CT Ratio : 1-9000 (Max.)	0.1A to 1.2A (Max.) 0.5A to 6A (Max.)	Standard	
Frequency	45 - 55Hz	Installation Category	CAT II (IEC / EN61010-1)
Power Factor	0.300 Lag(L) - 1.000 - 0.300 Lead(C)	Pollution	Degree 2 (IEC / EN61010-1)
VA Burden (Typical)		Environment	
Auxiliary	<2.5VA	Calibration	27°C \pm 5°C
Voltage I/P	<0.5VA / Phase	Operating	0 to 50°C, RH <70%
		Storage	-10 to 60°C, RH <70%
		Terminal Block	Screw Type
		Dielectric Strength	2.5KV @ 50Hz for 1min.
		Insulation Resistance	>20MOhms at 500VDC

Dimensions (mm)

Front	96x96	72 x 144	144x144
Depth (Behind Bezel)	43	130	59
Panel Cut-Out	92 ^(+0.8, -0.0) x 92 ^(+0.8, -0.0)	68 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)	138 ^(+0.8, -0.0) x 138 ^(+0.8, -0.0)

Ordering Information Model, Input Voltage, Input Current, Input Frequency, System 3P3E4W / 3P2E3W, CTR / PTR (if any), Auxiliary Supply & RS485 MODBUS Communication Port (Optional) **Standard :** As per IS 13875

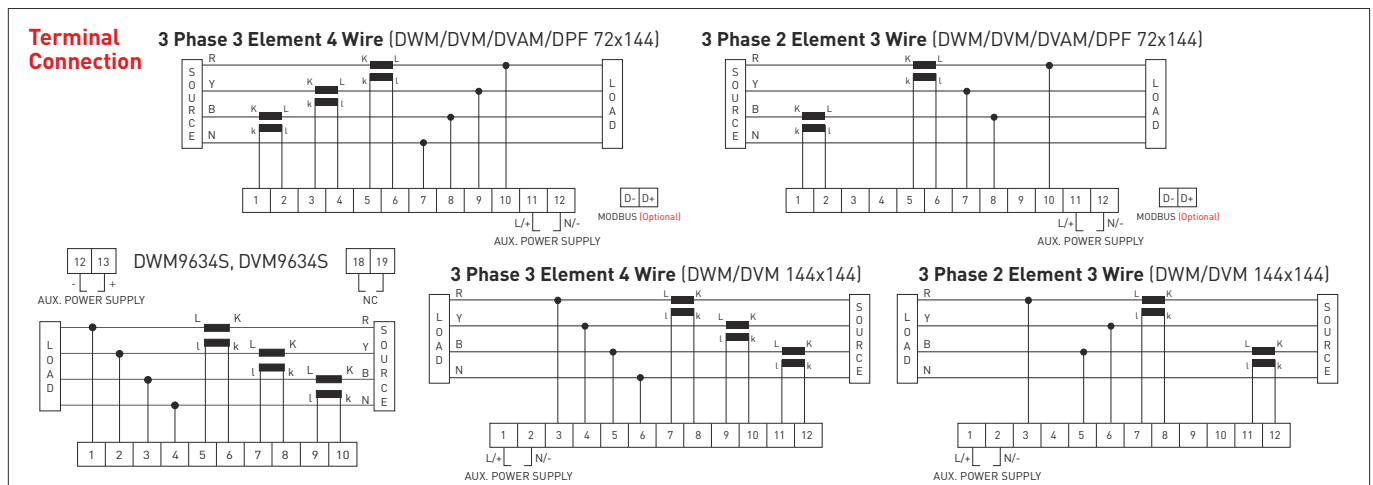



SM9635SD



SM35SD

Specifications


■ Measuring Method	Dual Slope A/D Conversion	■ VA Burden (Typical)	Auxiliary : < 1.0VA Voltage Input : < 1.0VA, Current Input : < 1.0VA
■ Sampling Rate	2.5 Samples per Second	■ Faceplate / Lens	Red Antiglare Faceplate with Annunciators
■ Display Type	14.2mm / 0.56" Digit Height, Red LED (Standard)	■ Dielectric Strength	2.5 kV at 50Hz for 1 min. between Case - Terminals
■ Maximum Display	1999 Counts for 3½ Digit Meters	■ Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700
■ Resolution	0.001 to 1 Count for 3½ depending on the Range	■ Mounting Clamps	Sturdy, Moulded ABS with suitable Hardware
■ Polarity Indication	" - " is indicated for Negative Input	■ Connectors	Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
■ Decimal Selection	Field Selectable	■ Display Stability	Within ± 2 Digits
■ Over Range Indication	" 1 " or " -1 " for 3½ Digit Meters		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		
■ Environmental Conditions	Calibration : 27 °C ± 5 °C, Operating : 0 to 50 °C, RH < 70% Storage : -10 to 60 °C, RH < 70%		

Display / Digits (max.)		3½ Digits, 1999 Counts	
Digit Height		14.2mm / 0.56"	
Ranges	Input	SM9635SD	SM35SD
DC	mV	0 - 200 mV	
	V	0 - 2, 20, 200, 1000 V	
	µA	0 - 200µA	
	mA	0 - 2, 20, 200 mA	
	A	0 - 2, 5, 20 A	
	Zero Suppressed	4 - 20 mA or 1 - 5 V	
Auxiliary Power Supply		Standard : 5VDC ± 10%	
Accuracy (Specified at 27± 5°C) ±(%FSD + dgt)	V DC	(0.1 + 2)	
	A DC	(0.2 + 2) in all ranges except (0.3 + 2) in 2 A & 5 A (0.5 + 2) in 20 A	
Dimensions (mm)	Front	96 x 96	48 x 96
	Depth (Behind Bezel)	90	88
	Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	44 (+0.5, -0.0) x 92 (+0.8, -0.0)

Ordering Information : Model, Input Range & Scale Display

Standard : As per IS 13875

Terminal Connection

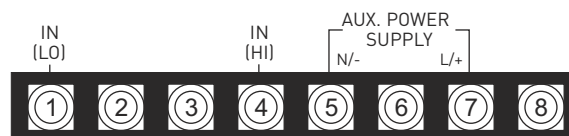

SM9635SD / SM35SD



SM35E


Specification

- | | | | |
|--------------------------------|--|---|--|
| ■ Measuring Method | Dual Slope A/D Conversion | ■ Faceplate / Lens Annunciators | Red Antiglare Faceplate with |
| ■ Sampling Rate | 2.5 Samples per Second | ■ Environmental Conditions | 0 to 50°C, <70% RH (Operation)
-10 to 70°C, <70% RH (Storage) |
| ■ Display Type | 14.2mm/0.56" Digit Height,
Red LED (Standard) | ■ Dielectric Strength Case - Terminals | 2.5 kV at 50Hz for 1 min. between |
| ■ Maximum Display | 1999 Counts for 3½ Digit Meters | ■ Case / Housing Material | DIN Black ABS, Dimension as per
DIN 43700 |
| ■ Resolution | 0.001 to 1 Count for 3½ depending
on the Range | ■ Bezel | Snap-Fit, Black ABS, Dimension as per
DIN 43718 |
| ■ Polarity Indication | " - " is indicated for Negative Input | ■ Mounting Clamps | Sturdy, Moulded ABS with suitable
Hardware |
| ■ Decimal Selection | Field Selectable | ■ Connectors | SM35E : PCB Edge Connectors
Provided with the Meters |
| ■ Over Range Indication | " 1 " or " -1 " for 3½ Digit Meters | | |
| ■ Maximum Overload | Voltage : 1.2 times continuous
Current : 2 times continuous | | |
| ■ VA Burden (Typical) | Auxiliary : < 1.0VA
Voltage Input : < 0.1VA,
Current Input : < 0.5VA | | |

Display / Digits (max.)	3½ Digits, 1999 Counts	
Ranges	Models	SM35E
DC	mV	0 - 75, 0 - 200 mV
	V	0 - 2, 20, 200 V
Auxiliary Power Supply	Standard : 5VDC ± 10%	
Accuracy (Specified at 27 ± 5°C) ± (%rdg + dgt)	V DC	(0.5 + 2)
Dimensions (mm)	Front	96 x 48
	Depth (Behind Bezel)	95
	Panel Cut-Out	44 ^(+0.5, -0.0) x 92 ^(+0.8, -0.0)

Ordering information : Model, Input Range, Scale Display & Optionals


Terminal Connection

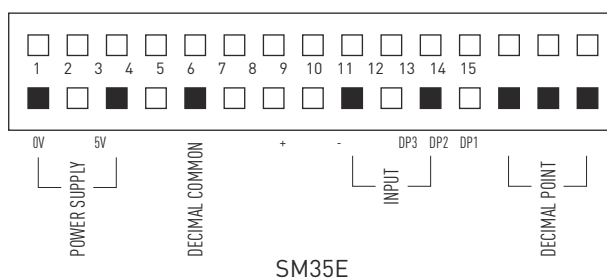




Specifications

■ Measuring Method	3½ Digit-Dual Slope A/D Conversion 4½ Digit-Successive Integration A/D Conversion	■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous
■ Sampling Rate	2.5 Samples per Second	■ Low Batt. Indication	"LO BAT" in LCD Modules
■ Display Type	12.4 mm/0.48" Digit Height LCD for GM035/ DH035, GM035-BL (with Backlight) 11.0 mm/0.43" Digit Height LCD for GM045 14.2 mm/0.56" Digit Height Red LED for GM135	■ External Start Hold	Provided in Models DH035 and GM045
■ Maximum Display	1999 counts for 3½ Digit Meters 19999 counts for 4½ Digit Meters	■ VA Burden (Typical)	Auxiliary : < 20mVA (LCD) & < 1VA (LED) Voltage : < 0.1VA, Current : < 0.25VA
■ Resolution	0.001 to 1 count for 3½ depending on the range 0.0001 to 1 count for 4½ depending on the range	■ Environment	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Polarity Indication	" - " is indicated for negative input	■ Mounting Bezel	Elegant Black ABS Bezel with 4 fixing screws and necessary hardware
■ Decimal Selection	Field Selectable	■ Connectors	PCB Edge Connector (Optional)
■ Over Range Ind.	" 1 " or " -1 "	■ Faceplate	Red Antiglare Lens - LED LCD Glass - LCD
■ Display Stability	Within ± 2 Digits		

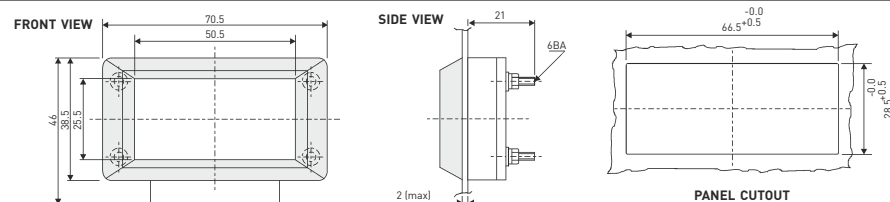Display / Digits (max.)		3½ Digits, 1999 Counts			4½ Digits, 19999 Counts
Ranges	Input	GM035-BL	GM035/DH035	GM135	GM045
DC	mV V µA mA		0 - 200 mV 0 - 2, 20, 200 V 0 - 200 µA 0 - 2, 20, 200 mA		
Auxiliary Power Supply		Standard : 9VDC ± 10% for GM035, GM035-BL, DH035 and GM045, 5VDC ± 10% for GM135 Note : Power Supply must be Isolated. Supply Ground must not be connected to IN-LO Signal. Please ensure when a shunt is used, it must be connected on Ground / Common side of the load and not on the Supply side.			
Accuracy (Specified at 27 ± 5°C) ± (% FSD + DGT)	V DC A DC	± 0.5% of FS + 3 digit			
Dimensions (mm)	Front	70.5 x 46			
	Depth (Behind Panel)	21			
	Panel Cut-Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)			
	Drawing				

Ordering Information : Model, Input Range & Scale Display

Terminal Connection

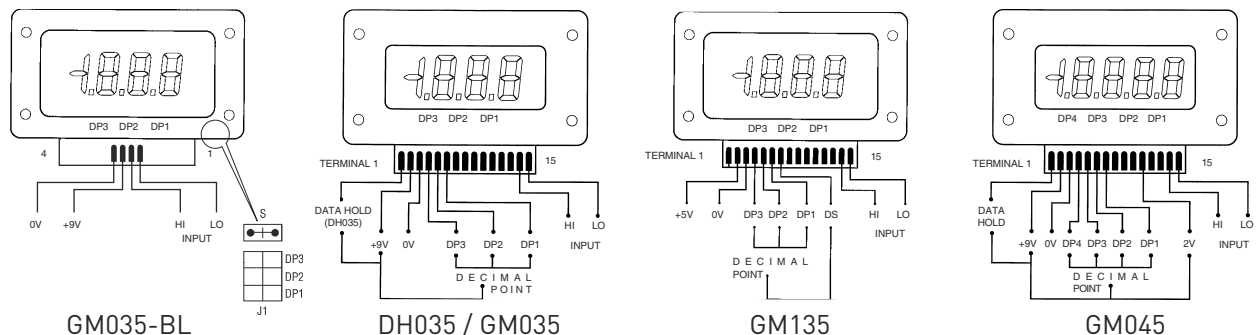

Note : External Start Hold - Provided for GM045 and DH035




LC035



LC135



Specifications

■ Measuring Method	3 ½ Digit - Dual Slope A/D Conversion	■ VA Burden (Typical)	Auxiliary : < 20mVA (LCD) & <1VA (LED) Voltage : < 0.1VA, Current : < 0.25VA
■ Sampling Rate	2.5 Samples per Second	■ Environment	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
■ Display Type	12.4 mm/0.48" Digit Height LCD for LC035 14.2 mm/0.56" Digit Height Red LED for LC135	■ Mounting Bezel	Elegant ABS Bezel with 2 fixing screws and necessary hardware
■ Maximum Display	1999 Counts	■ Connectors	Header Pins on the PCB
■ Resolution	0.001 to 1 Counts depending on the Range	■ Faceplate	Red Antiglare Lens - LED LCD Glass - LCD
■ Polarity Indication	" - " is Indicated for Negative Input	■ Display Stability	Within ± 2 Digits
■ Decimal Selection	Field Selectable		
■ Over Range Indication	" 1 " or " -1 "		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		

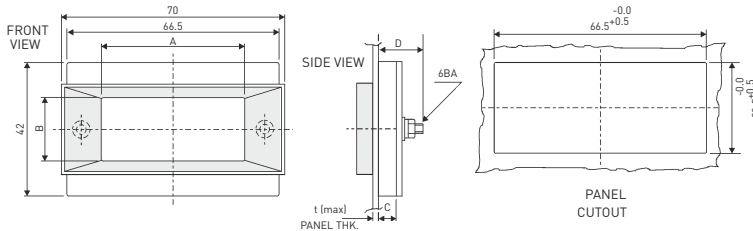Display / Digits (max.)		3½ Digits, 1999 Counts LCD		3½ Digits, 1999 Counts LED																			
Ranges	Input	LC035		LC135																			
DC	mV	0 - 200 mV																					
	V	0 - 2, 20, 200 V																					
	µA	0 - 200 µA																					
	mA	0 - 2, 20, 200 mA																					
Auxiliary Power Supply		Standard: 9VDC ± 10%		Standard: 5VDC ± 10%																			
		Note : Power Supply must be Isolated. Supply Ground must not be connected to IN-LO Signal. Please ensure when a shunt is used, it must be connected on Ground / Common side of the load and not on the Supply side.		Note : IN-LO Signal and Supply Ground may be connected Commonly																			
Accuracy (Specified at 27 ± 5°C)	V DC	± 0.5% of Full Scale + 3 digit																					
	A DC																						
Dimensions (mm)	Front	70 x 42																					
	Depth (Behind Panel)	15		21																			
	Panel Cut-Out	66.5 ^(+0.5, -0.0) x 28.5 ^(+0.5, -0.0)																					
	Drawing																						
		<table border="1"><thead><tr><th></th><th>LC035</th><th>LC135</th></tr></thead><tbody><tr><td>A</td><td>45</td><td>50</td></tr><tr><td>B</td><td>20</td><td>20</td></tr><tr><td>C</td><td>7.5</td><td>10.3</td></tr><tr><td>D</td><td>15</td><td>21</td></tr><tr><td>t</td><td>2</td><td>2</td></tr></tbody></table>					LC035	LC135	A	45	50	B	20	20	C	7.5	10.3	D	15	21	t	2	2
	LC035	LC135																					
A	45	50																					
B	20	20																					
C	7.5	10.3																					
D	15	21																					
t	2	2																					

Ordering Information : Model, Input Range & Scale Display

Terminal Connection

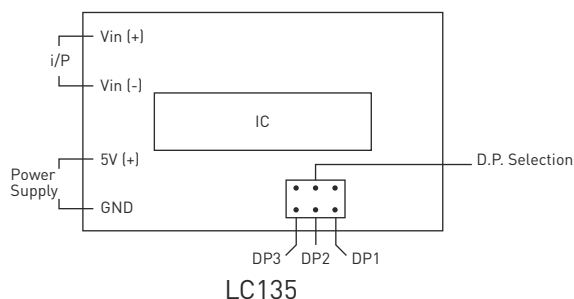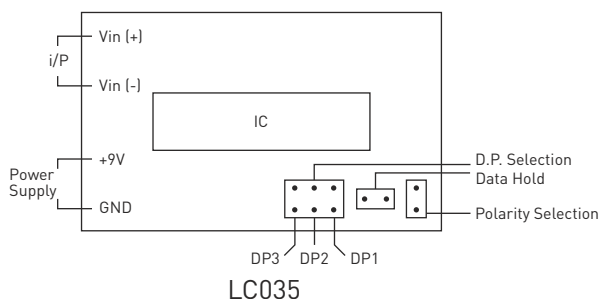






GM035N / GM035N-BL





LC035N / LC035N-BL

Specifications

■ Measuring Method	3½ Digit- LCD Micro-controller based design	■ Maximum Display	1999 Counts (Max.)
■ Sampling Rate	2.5 Samples per Second	■ Decimal Selection	Field Selectable
■ Display Type	0.78" / 20 mm Digit height LCD	■ VA Burden (Typical)	Aux. : <20mVA (LCD) Voltage : <0.1VA, Current : <0.25V
■ Display Stability	±2 Digit	■ Environment	Calibration : 27°C ±5°C, Operating : 0 to 50°C, RH<70% Storage : -10 to 60°C, RH<70%:
■ Resolutions	0.001 to 1 counts depends on Range / Scale Display	■ Mounting Bezel	Elegant Black ABS Bezel with fixing screws & necessary hardware
■ Over - Range Indication	" 1 "	■ Connectors	PCB Edge Connector (Optional) Header Pins on the PCB
■ Under -range indication	NA	■ Faceplate	LCD Glass - LCD
■ Maximum Overload	1.2 times continuous, Do not overload the module above 1.2 times		
■ Common Ground	For Auxiliary & Input Supply		
■ Polarity Control	Yes		
■ Low Batt Indication	"  " in LCD Modules		

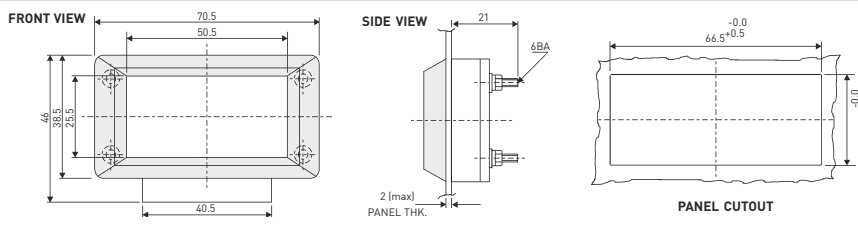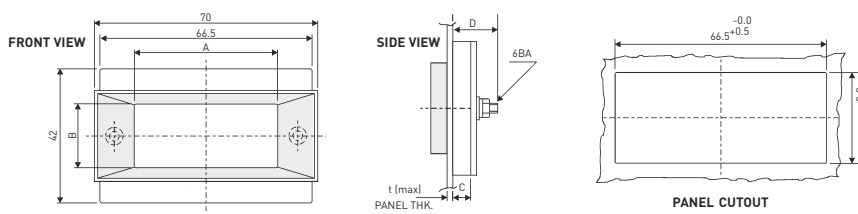Display / Digits (max.)				
Ranges	Input	GM035N	GM035N-BL	LC035N / LC035N-BL
DC	mV		0 - 75mV, 200mV	
	V		0 - 2, 20, 200V	
	mA		0 - 2, 20, 200mA	
Auxiliary Power Supply		Standard : 9V DC ±10%for GM035N / GM035N-BL, LC035N / LC035N-BL Note : Common Ground for Aux. & Input supply		
Accuracy		± 0.5% FSD + 3 Digit		
Dimensions (mm) GM035N / GM035N-BL	Front	70.5 x 46		
	Depth (Behind Panel)	21		
	Panel Cut - Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)		
Dimensions (mm) GM035N / GM035N-BL	Drawing For GM035N, GM035N-BL			
Dimensions (mm) LC035N / LC035N-BL	Front	70 x 42		
	Depth (Behind Panel)	15		
	Panel Cut - Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)		
Dimensions (mm) LC035N / LC035N-BL	Drawing For LC035N, LC035N-BL			

Ordering Information : Model, Input Range & Scale Display

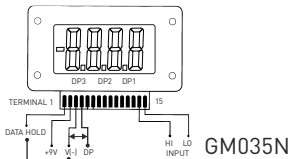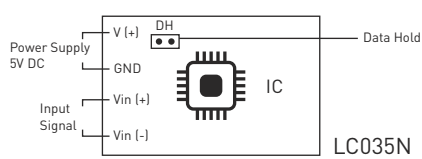Terminal Connection  <p>GM035N</p>	 <p>LC035N</p>
--	--

Note : Decimal Point selection is not applicable for shunt operated 75mV DC Range.



GM135N




LC135N

Specifications

■ Measuring Method	3½ Digit- LED Micro-controller based design	■ Decimal Point	Field Selectable
■ Sampling Rate	2.5 Samples per Secon	■ Maximum Display	1999 Counts (Max.)
■ Display Type	0.56" / 14.2 mm Red LED Super Bright Display for 3½ Digit.	■ VA Burden (Typical)	Aux. : <1VA (LED) Voltage : <0.1VA, Current : <0.25V
■ Display Stability	±2 Digits	■ Environment	Calibration : 27°C ±5°C, Operating : 0 to 50°C, RH<70% Storage : -10 to 60°C, RH<70%:
■ Resolutions	0.001 to 1 counts depends on Range / Scale Display	■ Mounting Bezel	Elegant Black ABS Bezel with fixing screws & necessary hardware
■ Over - Range Indication	" 1 "	■ Connectors	PCB Edge Connector (Optional) Header Pins on the PCB
■ Under -range indication	NA	■ Faceplate	Red Antiglare Lens - LED
■ Maximum Overload	1.2 times continuous, Do not overload the module above 1.2 times for Auxiliary & Input Supply		
■ Common Ground	Yes		
■ Polarity Control	Yes		

Display / Digits (max.)			
Ranges	Input	GM135N	LC135N
DC	mV	0 - 75mV, 200mV	
	V	0 - 2, 20, 200V	
	mA	0 - 2, 20, 200mA	
Auxiliary Power Supply		Standard : 5V DC ±10%for GM135N / LC135N Note : Common Ground for Aux. & Input supply	
Accuracy		± 0.5% FSD + 3 Digit	
Dimensions (mm) GM135N	Front	70.5 x 46	
	Depth (Behind Panel)	21	
	Panel Cut - Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)	
Dimensions (mm) GM135N	Drawing For GM135N		
Dimensions (mm) LC135N	Front	70 x 42	
	Depth (Behind Panel)	21	
	Panel Cut - Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)	
Dimensions (mm) LC135N	Drawing For LC135N		

Ordering Information : Model, Input Range & Scale Display

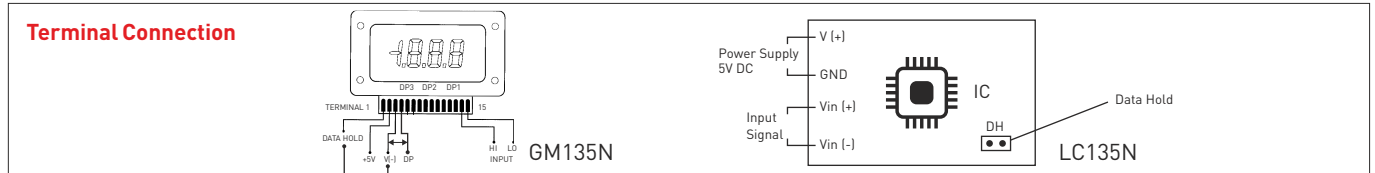

Note : Decimal Point selection is not applicable for shunt operated 75mV Range.



SM35MS


Specifications

■ Measuring Method	3½ Digit - Dual Slope A/D Conversion	■ VA Burden (Typical)	Auxiliary : <1VA Voltage : < 0.1VA, Current : < 0.25VA
■ Sampling Rate	2.5 Samples per Second	■ Environmental Conditions	Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70%/0 Storage : -10 to 60°C, RH < 70%
■ Display Type	14.2 mm / 0.56" Digit Height Red LED	■ Mounting	Flush Mounting
■ Maximum Display	1999 Counts	■ Connectors	Header Pins on the PCB
■ Resolution	0.001 to 1 Counts depending on the Range	■ Faceplate	Red Antiglare Lens - LED
■ Polarity Indication	" - " is Indicated for Negative Input	■ Display Stability	Within ± 2 Digits
■ Decimal Selection	Field Selectable		
■ Over Range Indication	" 1 " or " -1 "		
■ Maximum Overload	Voltage : 1.2 times continuous Current : 2 times continuous		

Display / Digits (max.)		3½ Digits, 1999 Counts LED
Ranges	Input	SM35MS
DC	V	0 - 2, 20, 200 V
Auxiliary Power Supply		Standard : 5V DC + 10% Note : IN-LO Signal & Supply Ground may be Connected Commonly
Accuracy (Specified at 27 ± 5°C)	V DC	± 0.5% of Full Scale
Dimensions (mm)	Front	79 x 42
	Depth (Behind Bezel)	24
	Panel Cut-Out	76.5 (+0.5, -0.0) x 39.5 (+0.5, -0.0)
	Drawing	<p>The drawing includes three views: Front View (79.0 x 42.0 mm), Side View (24 mm depth), and Panel Cutout (76.0 x 39.5 mm). Dimensions are given in millimeters.</p>

Ordering Information : Model, Input Range & Scale Display

Terminal Connection

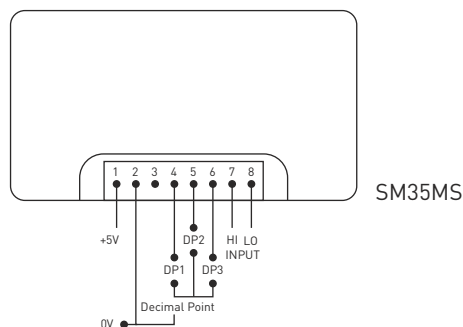

- Short Pin No.2 to Display Corresponding Decimal Point



Power Line Transducers

- ✓ AC Current Transducer
- ✓ AC Voltage Transducer
- ✓ Frequency Transducer
- ✓ DC Isolation Transducer / DC – DC Converter
- ✓ Active Power (Watt) / Reactive Power (Var) Transducer
- ✓ Power Factor Transducer
- ✓ Tap Position Transducer



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable



Introduction

MECO Power Line Transducers were designed by MICRO DENSHI CORPORATION of Japan for AC Power Line parameters like Voltage, Current, Wattage, Var, Power Factor, Frequency, DC Isolation and TAP Position.

These reliable and accurate Transducers are in applications in all sectors of the power and process industry since over 25 years.

These Transducers give a load independent and isolated DC output directly proportional to the input parameters.


MECO Transducers are widely used for automation and control of the power and process systems as well as for local and remote monitoring of the electrical parameters at every stage of electricity generation, transmission & distribution. They are ideal for SCADA, energy management, telemetry, data-logging as well as central monitoring systems.

MECO Transducers are generally designed to comply to the requirements of IEC 688 / EN 60688, EN 61010-1, EN 61326-1 and I.S. 12784 (Part 1). All MECO Transducers pass through a stringent manufacturing and in-house quality control process consisting of vibration, burn-in and calibration tests to ensure complete reliability and accuracy during the continuous operation.

MECO Transducers can also be supplied mounted in Panel with complete wiring and accessories upto termination point for applications in various industries like Power Utilities, SEB's, Cement, Steel, Aluminum, Chemicals, Fertilizers, Sugar, Petrochemicals etc.

Features

- Terminal Protection Cover
- Reliable & Rugged Static Circuits
- Low Ripple in Output Signal
- Flame Retardant Polycarbonate Case
- Choice of Multiple Asymmetrical Outputs
- Wide Choice of Suppressed Ranges
- Open and Short Circuit Protection for Outputs
- Dual Output (Non Isolated)
- Self-Powered, AC, DC, SMPS Auxiliary Supply
- Din Rail Mounting
- Bi-Directional Outputs
- Fast Response Time
- Bi-Directional Inputs for Import / Export

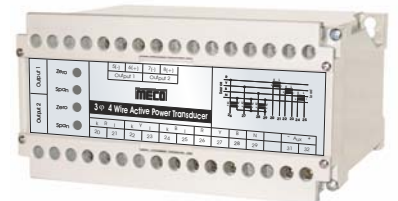

DIN Rail cum Back Panel Mounting

- Fixing Holes for Back Panel Mounting



Provision for DIN Rail Mounting



Reliable, Rugged & Static Electronic Circuit using High Stability Components

Terminal Protection Strip

- Terminal Protection Strip



Flame Retardant Polycarbonate (UL94V-0)
Self Extinguishing,
Non Drip Casing



Types

- AC Current (Average / TRMS)
- AC Voltage (Average / TRMS)
- Frequency
- Active Power (TRMS) (1 P & 3P - Balanced or Unbalanced System)
- Reactive Power (TRMS) (1 P & 3P - Balanced or Unbalanced System)
- Power Factor (Zero Crossing / TRMS) (1 P & 3P - Balanced or Unbalanced System)
- DC Isolation for Voltage & Current
- Tap Position / OLTC


Specifications


Accuracy	± 0.5% of Span (standard) Others on request (optional)	Warm Up Time	20 min. (approx.)
Accuracy Range	0 to 120%	Dielectric Strength	2.5kV at 50 Hz for 1 min.(Standard) 4kV (Optional), across Casing - Input/Output/Auxiliary Input - Output Input - Auxiliary Output - Auxiliary
Zero Adjustment	± 2% of Span (min.)	Impulse Test	5kV, 1.2 / 50µS
Span Adjustment	± 10% of Span (min.)	Casing	DIN Series Flame Retardant, Polycarbonate (UL 94V-0) Self Extinguishing, Non Drip, DIN Rail cum Wall Mounting Casing
Response Time	< 250 ms for 0 to 90% of Output < 1 s for 0 to 90% of Output for PF	Applicable Standards	IEC 688 / EN 60688 Electrical Measuring Transducers for converting AC Electrical Quantities to Analog or Digital Signals EN 61010-1 Safety requirements for Electrical Equipment for Measurement Control & Laboratory use EN 61326-1 Electrical Equipment for Measurement Control & Laboratory use - EMC requirements IS12784 (Part-1)1989 Electrical Measuring Transducers for converting AC Electrical Quantities into DC Electrical Quantities : General Purpose Transducer
Output Ripple	< 0.5% of Full Scale		
Compliance Voltage	12VDC (max.)		
Overload -Continuous	Voltage : 1.2 x Un Current : 2 x In		
Overload -Short Duration (1 sec.)	Voltage : 2 x Un Current : 20 x In (one time)		
Max. Open Circuit Voltage	< 30VDC		
Stability	± 0.25% Per Annum, Non Cumulative		
Environmental Conditions	As per IEC 688 User Group II		
Operating Temperature	0 to 55°C, RH < 95% (non condensing)		
Storage Temperature	-20 to 70°C, RH < 95% (non condensing)		
Calibrated At	27°C ± 5°C		
Temperature Coefficient	0.02% / °C		
Isolation	Complete (Input/Output/Auxiliary/ Case)		
Insulation Resistance	>100MΩ at 500VDC		
Self Powered (optional)	Max.Variation of ± 20% in input voltage		

Ordering Information

Model, Input Range, Input Voltage, Input Current, PTR, CTR, Frequency, Auxiliary Supply, Output 1, Output 2 & Optionals

Dimensions (in mm)

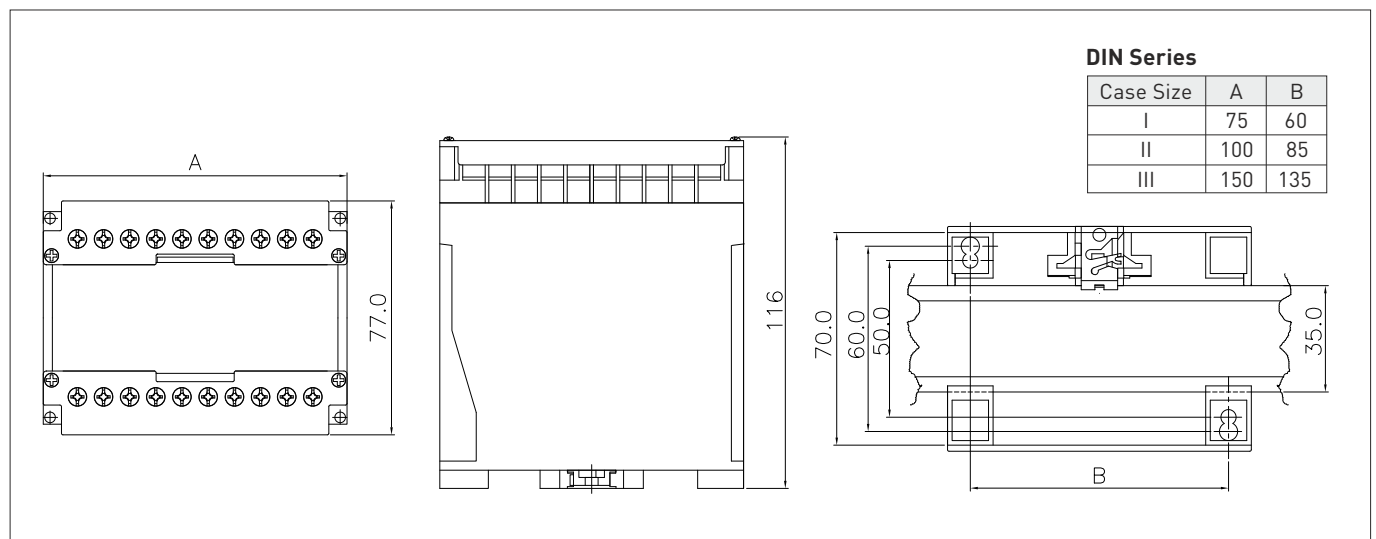


Sr.	 DIN Series	Auxilliary Power Supply			Type of Input		Type of Output				Isolation	Other				
		230V AC	SMPS - LV (19-90V AC / DC)	SMPS - HV (85-265V AC / DC)	Self Powered	Bi Directional	Expanded / Suppressed	Single / Dual (Symmetrical / Asymmetrical)	Dual (Non-Isolated)	Bi-Directional	Expanded / Suppressed	2.5KV Between Input / Output / Aux. / Case	Average	TRMS	External Zero & Span Adjustment	
1	AC Current	✓	✓	✓	✓	NA	✓	✓	✓	NA	✓	✓	✓	✓	✓	
2	AC Voltage	✓	✓	✓	✓	NA	✓	✓	✓	NA	✓	✓	✓	✓	✓	
3	W / KW / MW (1P1E 2W)- TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
4	W / KW / MW (3P 1E - Balanced Load)- TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
5	W / KW / MW (3P 2E 3W - Balanced & Unbalanced Load) - TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
6	W / KW / MW (3P 3E 4W - Balanced & Unbalanced Load) - TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
7	Var / KVar / MVar (1P 1E 2W)-TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
8	Var / KVar / MVar (3P 1E - Balanced Load)- TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
9	Var / KVar / MVar (3P 2E 3W - Bal. & Unbal. Load) - TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
10	Var / KVar / MVar (3P 3E 4W - Bal. & Unbal. Load) - TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	
11	Frequency Transducer	✓	Under development, Please inquire with sales@mecoinst.com			NA	NA	✓	✓	NA	✓	✓	✓	NA	✓	✓
12	PF(1P 1E 2W) - Zero Crossing	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
13	PF(3P 1E 2W - Balanced Load) - Zero Crossing	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
14	PF(3P 2E 3W - Balanced & Unbalanced Load)- TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	✓
15	PF(3P 3E 4W - Balanced & Unbalanced Load)- TRMS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓	✓	✓
16	DC Isolation / DC-DC Converter for Current and Voltage	✓	✓	✓	NA	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
17	TAP Position Transducer	✓	✓	✓	NA	NA	✓	✓	✓	NA	✓	✓	✓	NA	✓	✓

Note : ✓ Indicates choice of Standard / Optional features possible for DIN Series. Please specify your requirement of all Standard / Optional specifications clearly at the time of ordering. NA denotes not applicable.



CMT, CMT - TRMS

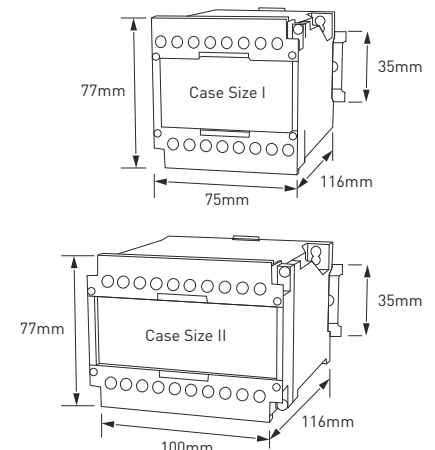

MECO AC Current Transducers measure AC Current and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series	Accuracy
Current - Average	CMT	±0.5% of Span
Current - TRMS	CMT - TRMS	

AC Input		DC Output *1,*2				Auxiliary Power Supply		
Input Ranges	0 - 5A (Direct) 0 - 1A (Direct) CTR / 5A CTR / 1A	Current		Voltage		Tolerance		Burden
Measuring Range	0 - 1.2 In	Output	Load	Output	Load	SMPS - HV	85 - 265V AC / DC	< 2 VA
Overload (continuous)	2 x In	0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ	SMPS - LV	19 - 90V AC / DC	
Burden	<0.5 VA *2<6 VA for Self Powered	0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ	Self *1 Powered	*1 For Input 1A & 5A AC, Output 0-10 or 0-20mA DC Available Only	Refer Input Burden
		0-10 mA	0-1 KΩ	1-5 V	> 10 kΩ	AC Linear Power Supply	230V AC ± 20 %	< 4 VA
		2-10 mA		0-10 V				
		0-20 mA	*0-500Ω	2-10 V				
		4-20 mA						

Optional

- Expanded or Suppressed Input Ranges
Example : 0 - 0.8 - 1.2 In
- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Expanded / Suppressed Output
Example : 4 - 6 - 20 mA for 0 - 0.8 - 1.2 In
- Dual Symmetrical / Asymmetrical Outputs
- Other output ranges available subject to technical feasibility
- *0-600Ω / 0-750Ω on Request

Optional



- Other Auxiliary Power Supplies available subject to technical feasibility


Dimension

DIN Series : ■ Case Size II for Self Powered ■ Case Size I for others


Note : ■ For Details refer General & Technical Specifications Page

Connection Diagram

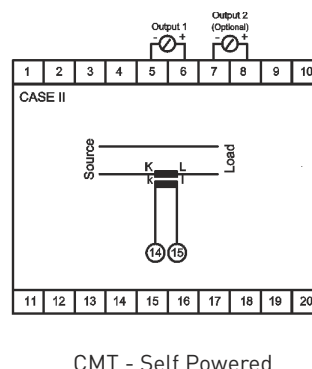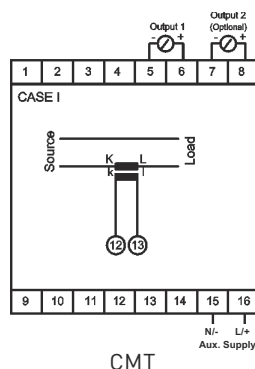

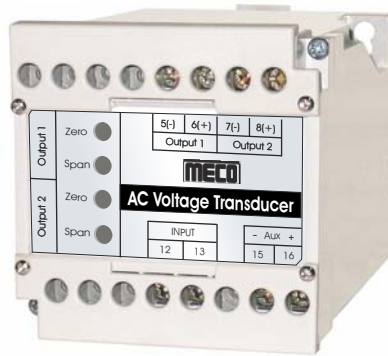

VMT, VMT - TRMS

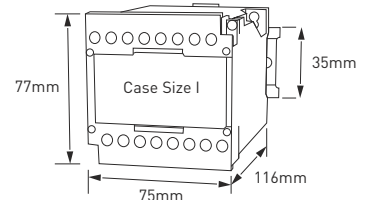

MECO AC Voltage Transducer measures AC Voltage and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series	Accuracy
Voltage - Average	VMT	±0.5% of Span
Voltage - TRMS	VMT - TRMS	

AC Input		DC Output				Auxiliary Power Supply		
Input Ranges	0 - 63.5 V	Current		Voltage		Tolerance		Burden
	0 - 110 V	Output	Load	Output	Load	SMPS - HV	85 - 265V AC / DC	< 2 VA
	0 - 230 V	0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ			
	0 - 300 V	0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ			
	0 - 440 V	0-10 mA	0-1 KΩ	1-5 V				
	0 - 500 V	2-10 mA		0-10 V	> 10 kΩ			
Measuring Range	0 - 1.2Un	0-20 mA	*0-500 Ω	2-10 V				
Overload (continuous)	1.2 x Un	4-20 mA						
Burden	< Un x 6mA							
	< 6 VA for Self Powered							

Optional

- Expanded or Suppressed Input Ranges also available. Example : 0 - 0.8 - 1.2 Un
- Above Input Ranges with suitable PTR also available.
- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Expanded or Suppressed Output Example : 4 - 6 - 20 mA for 0 - 0.8 - 1.2 Un
- Dual Symmetrical & Asymmetrical Outputs
- Other output ranges available subject to technical feasibility
- *0-600 Ω / 0-750 Ω on Request

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ■ Case Size I


Note : ■ For Details refer General & Technical Specifications Page

Connection Diagram

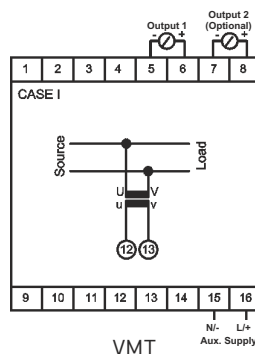



FT

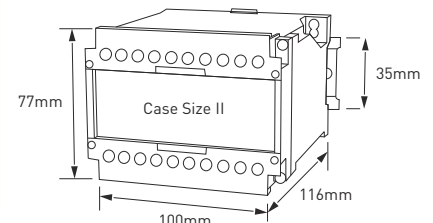

MECO Frequency Transducer measures Power Frequency over a specified Frequency Range and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Model : FT (DIN Series)	Accuracy : $\pm 0.5\%$ of Span
--------------------------------	--

AC Input		DC Output				Auxiliary Power Supply		
Input Ranges	45 - 55 Hz 45 - 65 Hz 55 - 65 Hz	Current		Voltage		Tolerance ($\pm 20\%$)	Burden	
Input Voltage	63.5/110/230/440 V (any one only)	Output	Load	Output	Load	AC Linear Power Supply	< 4 VA	
Measuring Range	0.8 - 1.2 Un	0-1 mA	0-10 K Ω	0-1 V	> 1 k Ω	230 V		
Overload (continuous)	1.2 x Un	0-5 mA	0-2 K Ω	0-5 V	> 5 k Ω	24 V		
Burden	< Un x 5.5mA < 6 VA for Self Powered	0-10 mA	0-1 K Ω	1-5 V	> 10 k Ω	48 V		
		2-10 mA		0-10 V		110 V		
		0-20 mA		2-10 V		220 V		
		4-20 mA	0-500 Ω			Self Powered	Max. Variation of $\pm 20\%$ allowed in Input Voltage	Refer Input Burden

Optional

- Above Input Ranges with suitable PTR also available
- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Other output ranges available subject to technical feasibility

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension


DIN Series : ■ Case Size II

Note : ■ For Details refer General & Technical Specifications Page

Connection Diagram



FT

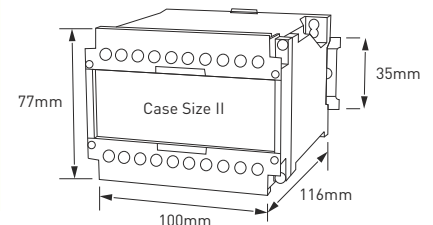

DTI

MECO DC Isolation Transducer takes various DC Voltage or DC Current signal inputs and provides a Stable, Ripple-Free and Optically Isolated DC load independent output in the form of current or voltage. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Model : DTI (DIN Series)				Accuracy : $\pm 0.5\%$ of Span			
DC Input			DC Output				Auxiliary Power Supply
Input Ranges	0-100 mV	4-20 mA	Current		Voltage		Tolerance
	0-1 V	2-10 mA	Output	Load	Output	Load	Burden
	0-5 V	1-5 mA					
	1-5 V	0-1 mA	0-1 mA	0-10 K Ω	0-1 V	> 1 k Ω	
	0-10 V	0-10 mA	0-5 mA	0-2 K Ω	0-5 V	> 5 k Ω	
	2-10 V	0-16 mA	0-10 mA	0-1 K Ω	1-5 V	> 10 k Ω	
Measuring Range	0-1.2 I _n , 0-1.2 U _n		2-10 mA	*0-500 Ω	0-10 V	> 10 k Ω	< 2.5 VA
Overload (continuous)	1.2 x U _n , 2 x I _n		0-20 mA		2-10 V		
Burden	10 k Ω m/V for Voltage 100 mV for Current		4-20 mA				
Bi-directional Inputs	-50/0/50 mV DC to -300/0/300 V DC		4-12-20 mA	*0-500 Ω	0-5-10 V	> 10 k Ω	AC Linear Power Supply
							110 V \pm 20 %
							230 V \pm 20 %
							< 4 VA

Optional

- Bi-directional Inputs available
- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- Other output ranges available subject to technical feasibility
- *0-600 Ω / 0-750 Ω on Request

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ■ Case Size II

Note : ■ For Details refer General & Technical Specifications Page


Connection Diagram

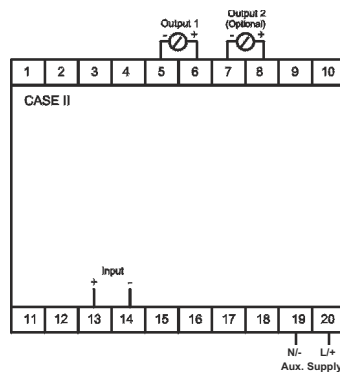

DTI



TPT

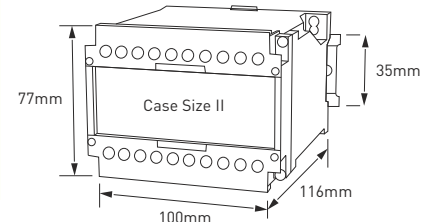

MECO Tap position Transducer takes various Resistance inputs and provides a Stable, Ripple-Free and Optically Isolated DC load independent output in the form of current or voltage. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Model : TPT (DIN Series)			Accuracy : ±0.5% of Span				
Resistance Input Resistance input from potentiometric transformer tap positions upto 99 transformer taps. 100 KOhms max.	DC Output				Auxiliary Power Supply		
	Current		Voltage		Tolerance		Burden
	Output	Load	Output	Load	SMPS - HV	85 - 265V AC / DC	< 2.5 VA
	0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ			
	0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ			
	0-10 mA	0-1 KΩ	1-5 V				
	2-10 mA		0-10 V	>10 kΩ			
	0-20 mA	*0-500Ω	2-10 V				
	4-20 mA						
AC Linear Power Supply		110 V ± 20 %	< 4 VA				
		230 V ± 20 %					

Optional

- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- Other output ranges available subject to technical feasibility
- *0-600 Ω / 0-750 Ω on Request

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension


DIN Series : ■ Case Size II

Note : ■ For Details refer General & Technical Specifications Page


Connection Diagram

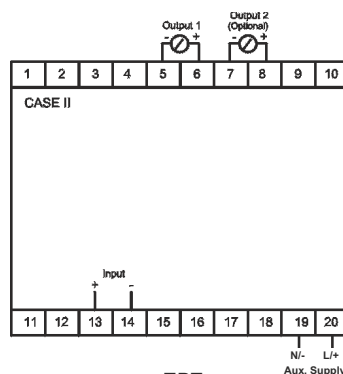

TPT

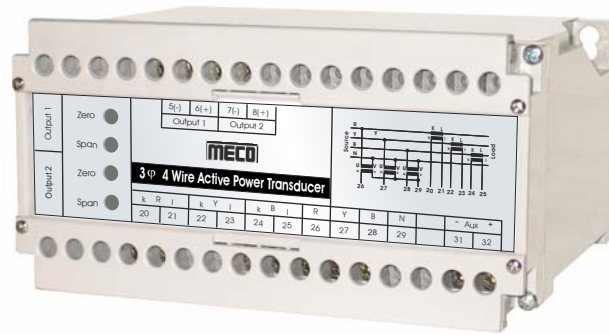

WT, RPT

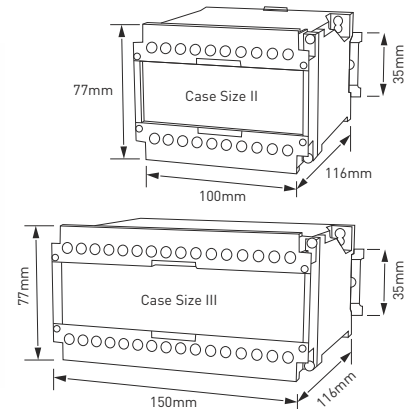

MECO AC Active Power (Watt) & Reactive Power (Var) Transducers measure Power in 1 Phase, 3 Phase 3 Wire and 3 Phase 4 Wire in balanced or unbalanced electrical systems and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. These Transducers can measure both Import and Export of Power. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Type	Watt	Var	Accuracy
1Phase 1Element 2Wire - TRMS	WT11	RPT11	±0.5% of Span
3Phase 1Element 2Wire (Balanced) - TRMS	WT31	RPT31	
3Phase 2Element 3Wire (Balanced & Unbalanced) - TRMS	WT33	RPT33	
3Phase 3Element 4Wire (Balanced & Unbalanced) - TRMS	WT34	RPT34	

AC Input	
Input Voltage	0-63.5/110/230/440 V (any one only)
Input Current	0-1/5 A (any one only)
Input Frequency	50/60/400 Hz (any one)
Input PF Range	0 (Lag) - 1 - 0 (Lead)
Measuring Range	0-1.2 x Un x In
Overload (continuous)	2 x In and 1.2 x Un
Burden (Voltage)	< Un x 6mA/Phase < 6 VA for Self Powered
Burden (Current)	< 0.5VA / Phase

DC Output			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	*0-500Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance		Burden
AC Linear Power Supply	230 V ± 20%	< 4 VA
SMPS-HV	85-265 V AC/DC	< 2 VA
SMPS-LV	19-90 V AC/DC	
Self Powered	Max. Variation of ± 20% allowed in Input Voltage	Refer Input Burden

Optional

- Above Input Ranges with suitable CTR/PTR also available
- Bi-directional inputs for Import / Export of Power

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- *0-600Ω / 0-750Ω on Request

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension


- DIN Series :**
- Case Size II for 1 Phase
 - Case Size III for 3 Phase

Note : ■ For Details refer General & Technical Specifications Page


Connection Diagram




WT11
Case Size II




WT31
Case Size III




WT33/RPT33
Case Size III

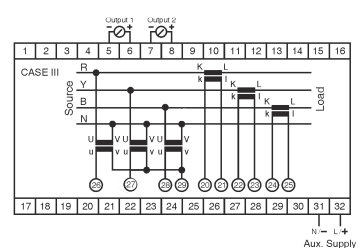

WT34/RPT34
Case Size III

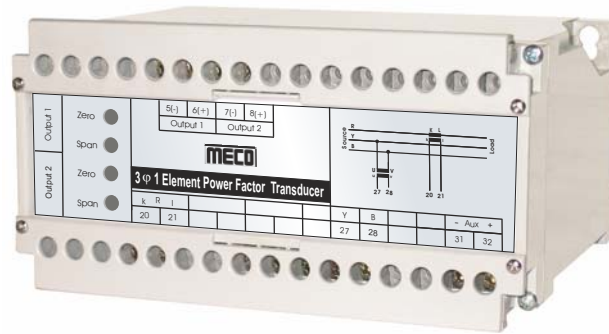

PFT

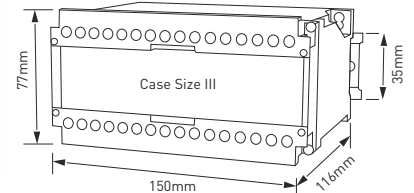

MECO AC Power Factor Transducers measure the Power Factor in 1 Phase and 3 Phase electrical systems. The resulting output signal is directly proportional to the system power factor. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series	Accuracy
1Phase 1Element 2Wire - Zero Crossing	PFT11	±0.5% of Span
3Phase 1Element 2Wire (Balanced) - Zero Crossing	PFT31	
3Phase 2Element 3Wire (Balanced & Unbalanced) - TRMS	PFT33-TRMS	
3Phase 3Element 4Wire (Balanced & Unbalanced) - TRMS	PFT34-TRMS	

AC Input		DC Output				Auxiliary Power Supply		
Input Voltage	63.5/110/230/440 V (any one only)	Current		Voltage		Tolerance (± 20 %)		Burden
Input Current	1/5 A (any one only)	Output	Load	Output	Load	AC Linear Power Supply	110 V	< 4 VA
Input Frequency	50/60 Hz (any one)	0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ		230 V	
Input PF Range	0.5 (Lag) - 1.0 - 0.5 (Lead)	0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ	DC	24 V	
Measuring Range	0.8Un~1.2Un, 0.2In~1.2In	0-10 mA	0-1 KΩ	1-5 V				
Overload (continuous)	2 x In and 1.2 x Un	2-10 mA		0-10 V	>10 kΩ			
Burden (Voltage)	< Un x 6mA/Phase < 6 VA for Self Powered	0-20 mA	2-10 V					
Burden (Current)	< 0.5VA / Phase	4-20 mA						
						Self Powered	Max. Variation of ±20% allowed in Input Voltage	Refer Input Burden

Optional

- Above Input Ranges with suitable CTR/PTR also available
- Bi-directional inputs for Import / Export of Power

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension


DIN Series : ■ Case Size III

Note : ■ For Details refer General & Technical Specifications Page


Connection Diagram




PFT11



PFT31



PFT33



PFT34

BLUE STAR

Blue Star Limited
Block 2-A, DLF Corporate Park,
DLF Quota Enclave, Phase - II,
Mehrauli-Gurgaon Road,
Gurgaon (Haryana) 122 002, India.
Tel : +91 124 409 4000
Fax : +91 124 409 4004
www.bluestarindia.com

Dt 16.12.2015

M/s. Mecco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300 Fax No. 022 - 27673310

Kind Attn Mr Haren Shah

Sub Performance of MECO Make Power Line Transducers for Delhi Metro Rail Corporation (DMRC - Delhi)

Please refer our Purchase orders to MECO Instruments Pvt. Ltd. Mahape, Navi Mumbai for Supply of MECO Make Power Line Transducers for Delhi Metro Rail Corporation (DMRC - Delhi) Projects.

Performance of MECO Make Power Line Transducers (Current, Voltage, Power Factor, Active Power, Reactive Power & Frequency Transducers) supplied to us are as per specification and working satisfactory at DMRC Sites.

We look forward to have similar kind of service and support in future also.

Thanking You,


Gaurav Khator
Blue Star Ltd, Gurgaon

Registered Office: Kartori Buildings, Mohan T Advani Chowk, Jamshedpur Tata Road, Mumbai 400 020, India. Tel : +91 22 6665 4000 Fax : +91 22 6665 4152
CIN L 28920MH1949PLC 006870

ABB

Certificate of Appreciation

This is in appreciation towards the contribution of **M/s. Mecco Instruments Pvt. Ltd.** to **ABB Ltd., LV- Drives** for adopting good quality systems in meeting ABB business growth during the years 2006 & 2007.


GNV Subba Rao
Business Head
Drives - ABB Ltd.,

stelmecc
beyond boundaries



Stelmec Limited
(CIN : U31200MH2009PLC124565)
MV SWITCHGEAR DIVISION-II
Survey No. 90 & 92/1,
Visar - Vajreshwar Road, At: Ugaon,
P. O. Bhatsine, Tal: Vasar,
Dist. Palghar - 401 370, Maharashtra, India.
Phone : 8291947259, 8291947260
E-mail : sales@stelmecc.com
Website : www.stelmec.com

Date: 09.01.2023

To,
M/s. Mecco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300

Dear Sir,

Kind Attn : Dr. Kamal Goliya - CEO

Sub Satisfactory Executions of Supply of MECO Panel Meters against Purchase order No. STEL/110/GST0500/22-23 Dt. 26.08.2022.

Please refer our above and several Purchase order for Supply of MECO Make Analog Panel Meters. We are thank full to M/s. MECO Instruments Pvt. Ltd. Navi Mumbai for honouring timely delivery as per given schedule for all items.

We also appreciate Mr. Haren Shah and Mr. Amol Bharnuke for extending their excellent service during completion of order and providing / updating us time to time the proceeding in executing this order.

We look forward to have similar kind of service and support from your organization in our upcoming projects and orders.

Thanking You,
Your Faithfully,
M/s. Stelmec Ltd.


Authorised Signatory

c.c.
Mr. Haren Shah - Senior Marketing Executive
Email : haren.shah@meccinst.com & harenvshah@yahoo.com Mobile No. : 9820093232
Mr. Amol Bharnuke - Marketing Executive
Email : amol.bharnuke@meccinst.com Mobile No. : 9987466629

Registered & Corporate Office : 506/507, 55 Corporate Avenue, Saki Vihar Road, Andheri (E), Mumbai - 400 072.
Phone: 022 2803 4500 Email: corporate@stelmecc.com Website: www.stelmec.com

HI TECH
CALIBRATION SERVICES

No. 209, VGP Nagar, Mugappair West, Chennai - 600 037, INDIA.
Phone : 044 - 26 5 6 7 8 9 0 (5 Lines), Mobile : 95970 95960
enquiry@hitechcalibration.com | www.hitechcalibration.com

Ref No. HT/LT/2022-23/008

16-Apr-2022

CERTIFICATE OF APPRECIATION

To

Kishor Kumar Thakare (Marketing Manager - South India)
MECO Instruments Private Limited,
Navi Mumbai - 400710.

Dear Sir / Madam,

It is with great pleasure to inform you that your product (**Universal Calibrator MECO 90A**) we have purchased on **March 2022** is working properly and all the values are within the accuracy limit which is mentioned in the product manual. It is very user-friendly product and we are pleasure to recommend this product to other laboratories also.

We hope to have similar support from your organization so that it will strengthen our business relation.

For Hi Tech Calibration Services,


R. Shobana,
Calibration Engineer.

End of Letter



Analog Panel and Switchboard Meters

- ✓ AC Moving Iron Meters
- ✓ DC Moving Coil Meters
- ✓ AC Moving Coil Rectifier Type Meters
- ✓ Electronic Type W / VAR / PF / Hz Meters
- ✓ Rectangular AC & DC Meters
- ✓ Educational Desk Stand Meters



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable

General Specifications

Standards

All instruments are designed in accordance with the following international and national regulations: IS-1248; IEC-51; IEC-1010; BS89; EN60051 respectively various instruments. The overall dimensions comply with DIN43700 - 43718.

Technical Specifications

Materials

Case : Complies to DIN 43700
 Colour : White
 Front Frame : Complies with DIN 43718
 Colour : Black
 Front Glass : Flat glass

Protection

Case : IP52
 Terminals : IP00
 IP20 (with terminal cover)

Overload Capabilities

Withstand continuous overloads of 1.2 times for Ammeter and Voltmeter the nominal value and short duration overloads of upto 10 times for Ammeter and upto 2 times for Voltmeter the nominal values for 5 seconds.

Climatic Conditions

Reference temperature for these instruments is $27^{\circ}\text{C} \pm 2^{\circ}\text{C}$. The standard instruments can operate at a maximum relative humidity of 90%.

Operating Temperature

-10°C to $+55^{\circ}\text{C}$, RH<90%

Storage Temperature

-20°C to $+70^{\circ}\text{C}$, RH<90%

Accuracy Class

All instruments are calibrated according to Accuracy Class specified below as per applicable international standards:

- Moving Iron Meters : 1.5
- Moving Coil Meters : 1.0, 1.5, 2.5
- Electronic Analog Watt / Var Meters : 1.5, 1.0
- Power Factor Meters : $\pm 2^{\circ}$ Phase Angle
- Frequency Meters : 1.0

Influence of External Magnetic Fields

Moving Iron Meters are provided with an internal shield cup in order to prevent the influence of stray and low intensity magnetic fields.

Moving Coil and all other instruments have a center core self-shielding construction which protects against stray and external low intensity magnetic fields.

Mounting Position

The nominal operating position of the panel meters is vertical. The required mounting position is shown on the scale of the instrument. Instruments with horizontal and angular mounting positions can be supplied on request.

High Voltage Test

All instruments are designed to withstand 2.5kVRMS, 50Hz, for 1min.

Shock and Vibration Resistance

All meter movements are mounted on spring loaded shock absorbing type of jewel bearings which make the instrument capable of offering good resistance to shocks and vibration. This mechanism is much superior to traditional Taut-Band construction which is highly fragile. The Pivot Jewel mechanism is ideal for aviation, traction and marine applications.

Pointer

The pointers are in accordance with DIN 43802.

Zero Adjustment

A screw for zero adjustment is located on the front glass.

Scales

Instrument scales are in accordance with DIN43802 regulations. Special scales are available on request.

Markings and Symbols on Instruments / Meters

According to IEC51 requirements, all measuring instruments and their accessories bear on the dial, or on the external surface of the case, the markings indicating:

- Manufacturers name or trade mark
- Symbol of the measured parameter
- Accuracy / Accuracy Class
- Type of power supply and the number of measuring elements
- Test Voltage
- Operating method of the instrument
- Rated value
- Symbol for mounting position
- Symbol of the accessory or the transformer ratio for which the instrument has been calibrated.

Moving Iron Meters

These instruments consist of a moving piece of ferro magnetic material, which is under influence of a current carrying fixed coil. Considering the above mentioned operating process, these instruments are ideally suited for measuring TRMS current and voltage in alternating current circuits. Accuracy for these meters is applicable only within the nominal working range and not in the overscale range. When using external current transformer, please ensure that the secondary current value of the CT must be the rated current of the Ammeter i.e., I_n .

Moving Coil Meters

The operation of these instruments depends on the reaction of the current circulating in a moving coil and the field of a fixed permanent magnet. They can be

used on alternating current with a suitable rectifier inserted in the circuit.

Moving Coil instruments above 50A, the ammeters are to be used with external Shunts having 60mV or 75mV drop. The Shunts are usually calibrated for a lead resistance of usually less than 0.07 Ohm. When lead resistance is greater than 0.1 Ohm, it is advisable to use shunts of 100, 150 or 300mV drop.

Electronic Analog Watt, Var, PF & Hz Meters

These instruments are available for measuring Active and Reactive Power in single phase and three phase balanced or unbalanced load conditions. In addition to these we manufacture Power Factor Meters for single phase and three phase balanced load systems and line Frequency meters for different voltage ratings and different frequency bands.

Electronic Power meters use multiplier circuits which multiply instantaneous voltage and current.

The average of the product is in the form of analog DC current directly proportional to the AC power. This power is measured with DC moving coil meter. Scale is adjusted to indicate power. Sometimes these meters are used along with CTs and PTs. Bi-directional Watt/Var Meters to indicate export/import can be supplied on request. In Frequency meter a DC current proportional to the input frequency is obtained by using an electronic circuit. This output is calibrated in terms of frequency.

The circuit for Powerfactor meter gives current output proportional to phase angle. This output is bidirectional to discriminate between leading and lagging Powerfactor. Scale is marked in terms of $\cos\phi$, ϕ being the phase angle between voltage and current vector.







Since these Watt meters and Var meters are self powered, it is essential that the input voltage is within $\pm 15\%$ of the nominal value. At lower voltage, the instrument will function erratically.

To get proper accuracy from Powerfactor meter, please ensure input voltage is within $\pm 15\%$ of the rated value & current is between 20% to 120% of the rated value.

Note

Power meters and Powerfactor meters are normally supplied for 47 to 53 Hz operation. On request meters to suit 60Hz or 400 Hz can be supplied.

Active power, Reactive power & Low Powerfactor Wattmeter are calibrated at $\cos\phi = 1$, $\sin\phi = 1$ and $\cos\phi = 0.2$ Lag respectively.

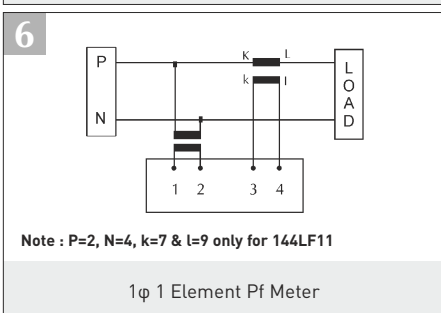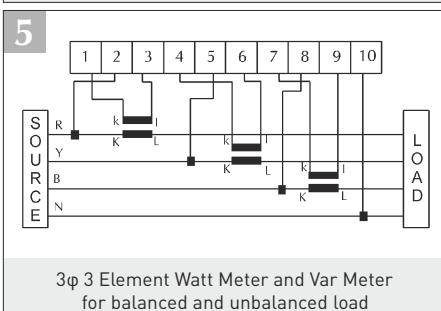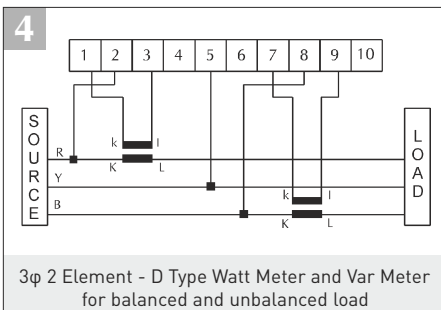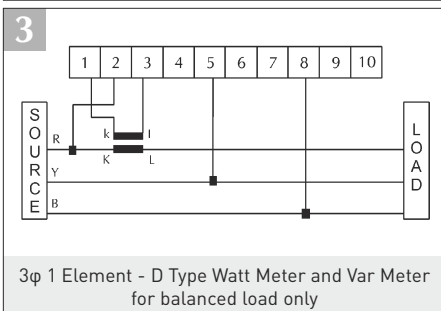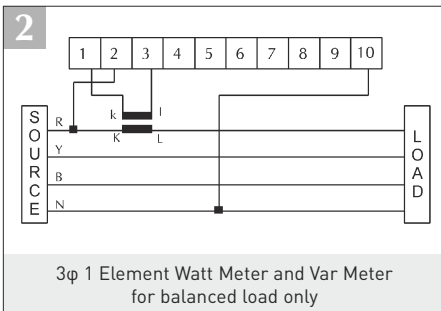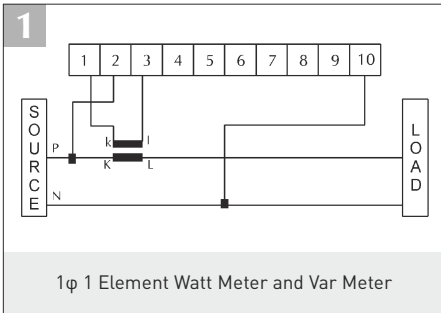

Burden

Electronic meters impose lower burden on supply than the conventional meters. Typical values are given below.

Watt & Var Meters		1-Phase, 230/250V	< 1.0
Voltage Rating	Total Burden(VA)	3-Phase, 110V	< 0.4
1-Phase, 63.5V	< 0.5	3-Phase, 400/440V	< 1.5
1-Phase, 230/250V	< 2.0	Current Rating	Total Burden (VA)
3-Phase, 110V	< 3x0.5	1.0 A	< 0.5
3-Phase, 400/440V	< 3x2.0	5.0 A	< 0.5
Current Rating	Total Burden (VA)	Frequency Meters	
1.0A	< 1VA/Phase	Voltage Rating	Total Burden (VA)
5.0A	< 1VA/Phase	63.5V	< 0.7
Powerfactor Meters		110V	< 1.2
Voltage Rating	Total Burden (VA)	230/250V	< 2.5
1-Phase, 63.5V	< 0.25	400/440V	< 4.5

Scale

Watt & Var Meters

Upper limits of measuring range is one of the decimal or subdecimal values from the following,

1, 1.2, 1.5, 2, 2.5, 3, 4, 5, 6, 7.5 & 8.

In the interest of standardisation it is recommended that the maximum value of the measuring range is chosen accordingly. Following examples will illustrate the method of working out these values.

i) Single Phase

$$V=250V, I = 5A, \cos\phi = 1$$

$$\text{Power} = V.I.\cos\phi = 250 \times 5 \times 1 = 1250W$$

Maximum limit in this case should be 1200 or 1500W.

ii) Three Phase

$$V = 110V, \text{PTR} = 33k V/110V$$

$$I = 5A, \text{CTR} = 500/5A, \cos\phi = 1$$

$$\text{Power} = \sqrt{3} \cdot V \cdot I \cdot \cos\phi \cdot \text{PTR} \cdot \text{CTR}$$

$$\text{Power} = \sqrt{3} \times 110 \times 5 \times 1 \times \frac{33 \times 1000}{110} \times \frac{500}{5}$$

$$\text{Power} = 28.578MW$$



Maximum & Minimum limit of Scaling $\pm 10\%$

Maximum limit in this case : 30MW & Minimum limit in this case : 25MW.

Ordering Information


Please give the following details while ordering :

Model	:	Model	:	96QW32
Full Scale Range	:	Full Scale Range	:	0-6 MW
CTR	:	CTR	:	600/5A
Voltage (Ph-Ph or Ph-N)	:	Voltage Ph-Ph	:	110V AC
PTR (if any)	:	PTR	:	6.6KV/110V
Connection diagram number :		Connection diagram number :		4

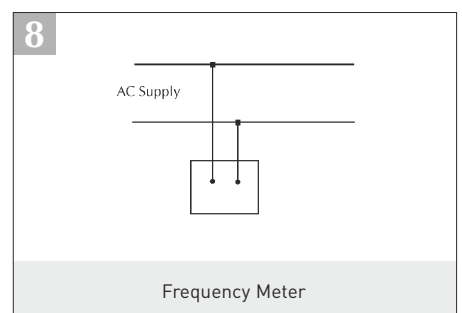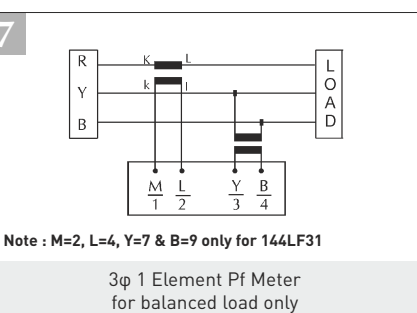




Interchangeable Scale



SQ72



SQ96

Model

Description
Movement Type
Accuracy
Self Consumption
Operating Voltage
Test Voltage
Construction & Design
Scale
Case/Housing Material
Bezel
Glass Faceplate
Mounting Fasteners/Clamps

Temperature Conditions

Front Protection
Terminal Protection

SQ72, SQ96

Moving iron meter of 90° deflection with interchangeable scale facility
Moving iron spring-mounted jewel bearing suspension
±1.5% of full scale as per IS 1248; EN 60051
Ammeters (upto 5A AC) ≤ 0.6VA; Voltmeters (upto 500V AC) ≤ 5VA
600V RMS max.
2.5KV AC for 1 minute at 50 Hz, 4KV AC (Optional)
According to IS 1248; EN 60051
According to DIN 43802
White ABS, dimensions as per DIN 43700
Black ABS, dimensions as per DIN 43718
Flat Glass
Ergonomic easy mountable clamps and nuts for easy installation on Switchboards, Panels, Mosaics etc.
- 10°C to + 55°C, RH < 90% (Operating) and
- 20°C to + 70°C, RH < 90% (Storage) EN60051
IP52 protection as per IS2147
Back cover for IP20 terminal protection as per IS2147 (optional)


Dimension and Panel Cutout							Ammeters						Voltmeters																
 — Optional Terminal Protection Cover							1 x In (A)		2x In (A)		6 x In (A)			with PT															
							Direct	with CT	Direct	with CT	Direct	with CT	Direct	Ratio and Scale															
<table><tr><th>Model</th><th colspan="6">Dimensions (mm)</th></tr><tr><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>F</th></tr><tr><td colspan="6"><small>Max</small> <small>+0.8 -0.0</small></td></tr></table>	Model	Dimensions (mm)						A	B	C	D	E	F	<small>Max</small> <small>+0.8 -0.0</small>						1A	CTR/5A	1/2A	CTR/5A	1/6A	CTR/5A				
	Model	Dimensions (mm)																											
	A	B	C	D	E	F																							
	<small>Max</small> <small>+0.8 -0.0</small>																												
	5A	CTR/1A	5/10A	CTR/1A	5/30A	CTR/1A	50V	PTR/63.5V																					
	10A	10/—	10/20A	10/20/—	10/60A	10/60/—	60V	PTR/110V	10KV/—																				
	15A	15/—	15/30A	15/30/—	15/90A	15/90/—	75V	PTR/230V	15KV/—																				
	20A	20/—	20/40A	20/40/—	20/120A	20/120/—	100V	PTR/250V	20KV/—																				
	25A	25/—	25/50A	25/50/—	25/150A	25/150/—	110V	PTR/400V	25KV/—																				
	30A	30/—	30/60A	30/60/—	30/180A	30/180/—	150V	PTR/440V	30KV/—																				
	40A	40/—	40/80A	40/80/—	40/240A	40/240/—	250V		40KV/—																				
	50A	50/—	50/100A	50/100/—	50/300A	50/300/—	300V	1KV/—	50KV/—																				
	60A	60/—	60/120A	60/120/—	60/360A	60/360/—	500V	1.2KV/—	60KV/—																				
	75A	75/—	75/150A	75/150/—	75/450A	75/450/—	600V	1.5KV/—	75KV/—																				
80A	100/—	80/160A	100/200/—	80/480A	100/600/—	750V	2KV/—	80KV/—																					
100A	150/—	100/200A	150/300/—	100/600A	150/900/—		2.5KV/—	100KV/—																					
							250/—		250/500/—		250/1500/—		3KV/—		and higher														
							400/—		400/800/—		400/2400/—		3.5KV/—			higher													
							500/—		500/1000/—		500/3000/—		4KV/—																
							600/—		600/1200/—		600/3600/—		5KV/—																
							1000/—		1000/2000/—		1000/6000/—		6KV/—																
							1500/—		1500/3000/—		1500/9000/—		7.5KV/—																
													8KV/—																


Ordering Information: Model, Input Range, CTR/PTR, Scale

Notes

- Double stamping / non-standard marking available.
- Gaskets (optional) for vibration proof available.
- Terminal protection cover (optional) on request for Voltmeter & Ammeter upto 20 A.
- AC instruments calibrated @ 50Hz. (400Hz on request.)
- Other ranges subject to technical feasibility.

Wiring Diagram

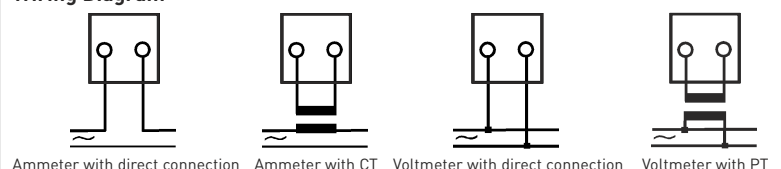



M72, M96



ML72, ML144



ML96



ML110

Model

Description

Movement Type

Accuracy

Sensitivity

Operating Voltage

Test Voltage

Construction & Design

Scale

Casing

M72, M96

Full Scale deflection 90°

Moving-coil with central magnetic Core;
spring-mounted bearing jewel suspension

± 1.5% of Full Scale

1000Q/V (Voltmeter); 200Q/V (Ammeter)

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz, 4KV AC (Optional)

According to IS 1248; EN 60051

According to DIN 43802

Size 72, 96 ABS Case with Glass Front

Dimensions and Panel cutout Refer Dimensions Page Overleaf

ML72, ML96, ML144, ML110

Full Scale deflection 240°

Moving-coil with central magnetic Core;
spring-mounted bearing jewel suspension

± 1.5% of Full Scale for ML96, ML144, ML110

± 2.5% of Full Scale for ML72

1000Q/V (Voltmeter); 200Q/V (Ammeter)

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz, 4KV AC (Optional)

According to IS 1248; EN 60051

According to DIN 43802

Size 72, 96, 144 ABS Case with Glass Front

Size 110 ABS Case with Clear Polycarbonate Cover
Refer Dimensions Page Overleaf

Ammeters				Voltmeters	
µA	mA	A*	On shunt	mV	V
	1 mA	1 A	—A/60 mV		1 V
	1.5 mA	1.5 A	—A/75 mV		1.5 V
	2 mA	2 A	—A/100 mV		2 V
	2.5 mA	2.5 A			2.5 V
	4 mA	4 A			4 V
	5 mA	5 A	5A/75 mV		5 V
	6 mA	6 A	6A/75 mV		6 V
	10 mA	10 A	10A/75 mV		10 V
	15 mA	15 A	15A/75 mV		15 V
	20 mA	20 A	20A/75 mV		20 V
	25 mA	25 A	25A/75 mV		25 V
	30 mA	30 A	30A/75 mV		30 V
	40 mA	40 A	40A/75 mV		40 V
	50 mA	50 A	50A/75 mV	50 mV	50 V
	60 mA		60A/75 mV	60 mV	60 V
	75 mA		75A/75 mV	75 mV	75 V
	100 mA		100A/75 mV	100 mV	100 V
	150 mA		150A/75 mV	150 mV	150 V
	250 mA		250A/75 mV	250 mV	250 V
400 µA	400 mA		400A/75 mV	400 mV	400 V
500 µA	500 mA		500A/75 mV	500 mV	500 V
600 µA	600 mA		600A/75 mV	600 mV	600 V
800 µA	800 mA		800A/75 mV	800 mV	800 V
			and higher		1000 V

Ordering Information: Model, Input Range, Scale

Notes

□ Ranges common to M and ML Series

■ All other refer to M Series only

* For ML72 DC direct current upto 1A. Above 1A use with external shunt.

a) Double stamping / non-standard / centre zero marking available.


b) Zero supp. DC ammeter for 4-20mA & voltmeter for 1-5V available.

c) Rubber gaskets for vibration proof available.


d) Other ranges subject to technical feasibility.

e) Terminal Protection Cover (Optional) on request for all Models except ML144


Wiring Diagram



Ammeter on Shunt



Ammeter with direct connection



Voltmeter with direct connection



C72, C96



MLC72, MLC144



MLC96



MLC110

Model

Description

Movement Type

Accuracy

Operating Voltage

Test Voltage

Self-Consumption

Frequency Range

Construction & Design

Scale

Casing

Dimensions and Panel cutout

Moving Coil measuring instruments with AC rectifier; Full Scale deflection 90°

Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension
± 1.5% of Full Scale

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz , 4KV AC (Optional)

< 1 VA

45 Hz to 1 KHz (Voltmeter & Ammeter)

1 KHz to 10KHz (Voltmeter - Optional)

According to IS 1248; EN 60051

According to DIN 43802

Size 72, 96 ABS Case with Glass Front

Refer Dimensions Page Overleaf

Moving coil measuring instruments with AC rectifier; Full Scale deflection 240°

Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension
± 1.5% of Full Scale for MLC96, MLC144, MLC110
± 2.5% of Full Scale for MLC72

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz , 4KV AC (Optional)

< 1 VA

45 Hz to 1 KHz (Voltmeter & Ammeter)

1 KHz to 10KHz (Voltmeter - Optional)

According to IS 1248; EN 60051

According to DIN 43802

Size 72, 96, 144 ABS Case with Glass Front

Size 110 ABS Case with Clear Polycarbonate Cover

Refer Dimensions Page Overleaf


Ammeters@						Voltmeters		
1 x In [A]		2 x In [A]		6 x In [A]		On PT		
Direct	On CT	Direct	On CT	Direct	On CT	Direct	Ratio and Scale	
1A	/(-)	1/2 A	/(-)	1/6 A	/(-)		-V/63.5 V	
5A	(5A or 1A)	5/10A	(5A or 1A)	5/30 A	(5A or 1A)		-V/110 V	10 KV
	10/-		10/20/-		10/60/-	10 V	-V/230 V	15 KV
	15/-		15/30/-		15/90/-	15 V	-V/250 V	20 KV
	20/-		20/40/-		20/120/-	20 V	-V/400 V	25 KV
	25/-		25/50/-		25/150/-	25 V	-V/440 V	30 KV
	30/-		30/60/-		30/180/-	30 V		40 KV
	40/-		40/80/-		40/240/-	40 V	1 KV	50 KV
	50/-		50/100/-		50/300/-	50 V	1.2 KV	60 KV
	60/-		60/120/-		60/360/-	60 V	1.5 KV	75 KV
	75/-		75/150/-		75/450/-	75 V	2 KV	100 KV
	100/-		100/200/-		100/900/-	100 V	2.5 KV	
	150/-		150/300/-		150/900/-	150 V	3 KV	
	250/-		250/500/-		250/1500/-	250 V	3.5 KV	
	400/-		400/800/-		400/2400/-	400 V	4 KV	
	500/-		500/1000/-		500/3000/-	500 V	5 KV	
	600/-		600/1200/-		600/3600/-	600 V	6 KV	
	1000/-		1000/2000/-		1000/6000/-	750 V	7.5 KV	
	1500/-		1500/3000/-		1500/9000/-	800 V	8 KV	
	and higher		and higher		and higher	1000 V		



Ordering Information: Model, Input, CTR/PTR, Scale

Notes

- Double stamping / non-standard marking available.
 - Rectifier type meters calibrated for AC sine wave.
 - Rubber gaskets for vibration proof available.
 - AC instruments normally calibrated at 50 Hz.
 - Other ranges available subject to technical feasibility.
 - Terminal Protection Cover (Optional) on request for all Models except MLC144
- @ From 1mA to 750mA AC (50Hz) meters are also available

Wiring Diagram

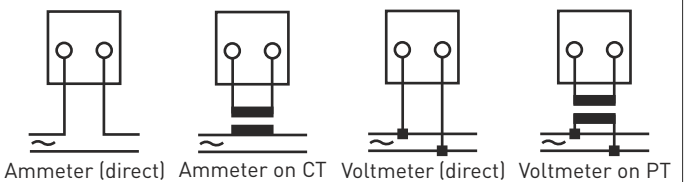



Rated Accuracy : ± 1.5% of F.S. for Watt & Var Meter (standard)
 ± 1.0% of F.S. for Watt & Var Meter(optional)
 ± 2° Phase Angle for Powerfactor Meter
 ± 1% of Full Scale for Frequency Meter
Test Voltage : 2.5KVAC for 1 min. @ 50 Hz, 4KV AC (optional)

Insulation Resistance : Over 20MΩhm at 500V DC
Power Supply : Self-Powered
Casing : Size 72, 96, 144 ABS Case with Glass Front
 Size 110 ABS Case with Clear Polycarbonate Cover



Continuous Over Load : 1.2 Times Rated Current / Voltage

Deflection			90°		240°			
Size in mm			72x72	96x96	72x72	96x96	110x110	144x144
Scale Length (mm)			60	90	110	155	175	230
System	Current Range (Amp)	Voltage Range (Volt)						
Watt Meters & Var Meters			Model Codes					
1 Phase 1 Element	1,5,10	63.5, 230	*72QW11 *72QV11	96QW11 96QV11	*72LW11 *72LV11	96LW11 96LV11	*110LW11 *110LV11	144LW11 144LV11
3 Phase 1 Element Balanced Load only	1,5,10	110, 440	*72QW31 *72QV31	96QW31 96QV31	*72LW31 *72LV31	96LW31 96LV31	*110LW31 *110LV31	144LW31 144LV31
3 Phase 2 Element [3 Wire] Balanced or Unbalanced Load	1, 5	110, 440	*72QW32 *72QV32	96QW32 96QV32	*72LW32 *72LV32	96LW32 96LV32	*110LW32 *110LV32	144LW32 144LV32
3 Phase 3 Element [4 Wire] Balanced or Unbalanced Load	1, 5	110/√3 440/√3	*72QW33 *72QV33	96QW33 96QV33	*72LW33 *72LV33	96LW33 96LV33	*110LW33 *110LV33	144LW33 144LV33
Powerfactor & Phase Angle Meter								
Single Phase	1, 5	63.5, 230	#72QF11	96QF11	#72LF11	96LF11	110LF11	144LF11
3 Phase Balanced Load	1, 5	110, 440	#72QF31	96QF31	#72LF31	96LF31	110LF31	144LF31
Frequency Meter								
40 - 60 Hz, 45 - 55 Hz, 45 - 65 Hz, 55 - 65 Hz, 360 - 440 Hz	NA	63.5, 110, 240, 440	F72	F96	#FL72	FL96	FL110	FL144

Notes

- * These Meters supplied with DIN Series Power Line Transducers.
- Meters with Dual scale / Tripple scale stamping can be supplied.
- Meters with centre zero or offset zero scale can be supplied.
- # These Meters Supplied with External Box. (Refer Dimension Page, Drawing 5)
- Rubber Gaskets for vibration protection available on request.
- Other Voltage and Current ranges available subject to technical feasibility.

Model, Input Voltage, Input Current, CTR / PTR, Scale, Accuracy Class

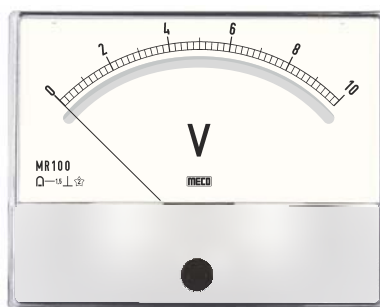
MR60, CR60

MR65, CR65

MR100, CR100

MR120, CR120
Model

Description

Movement Type

Accuracy

Sensitivity

Operating Voltage

Test Voltage

Frequency

Construction & Design

Scale

Casing

Dimensions and Panel cutout

MR60, MR65, MR100, MR120

DC Ammeters and Voltmeters full scale deflection 90°

Moving coil, central magnetic core, spring mounted bearing jewel suspension.

± 1.5% of Full Scale for MR100, MR120

± 2.5% of Full Scale for MR60, MR65

1000Ω/V (Voltmeter); 200Ω/V (Ammeter)

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz, 4KV AC (Optional)

-

According to IS 1248; EN 60051

According to DIN 43802

ABS case with Clear Polycarbonate Cover

Refer Dimensions Page Overleaf

CR60, CR65, CR100, CR120 AC

Ammeters and Voltmeters full scale deflection 90°

Moving coil, central magnetic core, spring mounted bearing jewel suspension with rectifier circuit.

± 1.5% of Full Scale for CR100, CR120

± 2.5% of Full Scale for CR60, CR65

-

600 V RMS max.

2.5 KV AC for 1 minute at 50 Hz, 4KV AC (Optional)

45Hz to 1KHz (Volt), 45-100Hz (Amp)

According to IS 1248; EN 60051

According to DIN 43802

ABS case with Clear Polycarbonate Cover

Refer Dimensions Page Overleaf

DC Ranges : MR Series

Ammeters*						Voltmeters		
μA	mA		A*	On Shunt		mV	V	
400 μA 500 μA 600 μA	1 mA	50 mA	1 A	—A/60 mV	50A/75 mV	50 mV	1 V	50 V
	1.5 mA	60 mA	1.5 A	—A/75 mV	60A/75 mV	60 mV	1.5 V	60 V
	2 mA	75 mA	2 A	—A/100 mV	75A/75 mV	75 mV	2 V	75 V
	2.5 mA	100 mA	2.5 A		100A/75 mV	100 mV	2.5 V	100 V
	4 mA	150 mA	4 A		150A/75 mV	150 mV	4 V	150 V
	5 mA	250 mA	5 A	5A/75 mV	250A/75 mV	250 mV	5 V	250 V
	6 mA	400 mA	6 A	6A/75 mV	400A/75 mV	400 mV	6 V	400 V
	10 mA	500 mA	10 A *	10A/75 mV	500A/75 mV	500 mV	10 V	500 V
	15 mA	600 mA	15 A	15A/75 mV	600A/75 mV	600 mV	15 V	600 V
	20 mA		20 A	20A/75 mV	and higher		20 V	
	25 mA		25 A	25A/75 mV			25 V	
	30 mA		30 A	30A/75 mV			30 V	
	40 mA		40 A	40A/75 mV			40 V	
			50 A					

* MR60 direct upto 10A DC only. Above 10A use with external shunt, for MR60, MR65, MR100 4-20mA DC range use with external box supplied with the instrument.

AC Ranges : CR Series

Ammeters @						Voltmeters			
1 x In (A)		2 x In (A)		6 x In (A)		On PT			
Direct	On CT	Direct	On CT	Direct	On CT	Ratio and Scale			
	(/-) (5A or 1A)		(/-) (5A or 1A)		(/-) (5A or 1A)	-V/63.5 V			
1 A	10/-	100/-	1/2 A	10/20/-	100/200/-	10 V	100 V	-V/110 V	2 KV
5 A	15/-	150/-	5/10 A	15/30/-	150/300/-	15 V	150 V	-V/230 V	2.5 KV
	20/-	250/-		20/40/-	250/500/-	20 V	250 V	-V/250 V	3 KV
	25/-	400/-		25/50/-	400/800/-	25 V	400 V	-V/400 V	3.5 KV
	30/-	500/-		30/60/-	500/1000/-	30 V	500 V	-V/440 V	4 KV
	40/-	600/-		40/80/-	600/1200/-	40 V	600 V		5 KV
	50/-	1000/-		50/100/-	1000/2000/-	50 V		1 KV	6 KV
	60/-	1500/-		60/120/-	1500/3000/-	60 V		1.2 KV	7.5 KV
	75/-	and higher		75/150/-	and higher	75 V		1.5 KV	8 KV
									10 KV
									15 KV
									20 KV
									25 KV
									30 KV
									40 KV
									50 KV
									60 KV
									75 KV

@ From 100mA to 5A AC, use with External CT Box, supplied with the instrument.

Ordering Information: Model, Input range, Scale, CTR/PTR

Notes

- a) Double stamping /non-standard / centre zero marking available. b) Zero suppressed DC ammeter for 4-20mA and voltmeter for 1-5V available.
 c) Other ranges available subject to technical feasibility.

Moving Coil Educational Desk Stand Meters

MECO Educational Desk Stand Meters are ideal for laboratory use. These meters are made of an unbreakable ABS desk stand with two or three terminals and fitted with MR65, MR100, CR65 or CR100 meters.



MR65EDM



MR100EDM

Model	MR65EDM (DC)	MR100EDM (DC)
Accuracy	±2.5% of Full Scale	±1.5% of Full Scale
Scale Length	68mm	80mm

Ranges	MR65EDM / MR100EDM
Microamps	500μA to 0-1000μA
Milliamps	0-1mA to 0-1000mA
Amps	0-1A to 0-30A
Millivolts	0-50mV to 0-1000mV
Volt	0-1V to 0-1000V
Galvanometer	30-0-30 G or 50-0-50 G with 20 μA/Div

Note : Dual ranges available subject to technical feasibility.



CR65EDM




CR100EDM


Model	CR65EDM (AC)	CR100EDM (AC)
Accuracy	±2.5% of Full Scale	±1.5% of Full Scale
Scale Length	68mm	80mm

Ranges	CR65EDM / CR100EDM
Microamps	----
Milliamps	0-1mA to 0-1000mA
Amps	0-1A to 0-5A
Millivolts	----
Volt	0-10V to 0-1000V
Galvanometer	----

Dimension (mm)

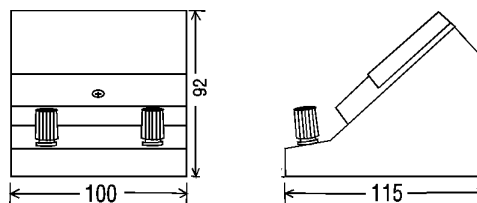


Edge Mounting Rectangular AC & DC Panel Meter



DC : ME70, AC : CE70

Casing : Clear transparent Polycarbonate Cover
Accuracy : ±2.5% of Full Scale
Ranges & details : Similar to models MR60 and CR60, Current Range max. 1.5 A
Scale Length : 52mm

Dimensions (mm)


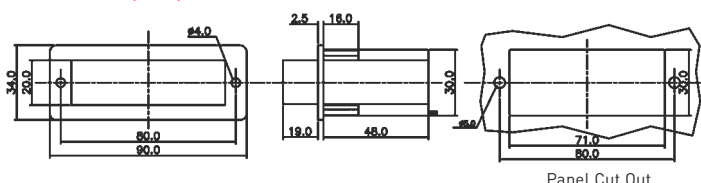


Panel Cut Out

MODELS	SCALE LENGTH (mm)	REFER DRAWING	A	B	C	D	E	F	EXT. BOX # DRAWING
SQ72 (VOLTMETER & AMMETER UPTO 20A)	64	1	72	51.5	67	68	17	19.5	-
SQ72 (AMMETER ABOVE 20A)	64	1	72	51.5	67	68	23	19.5	-
M72,F72,C72(#),72QF11(#),71QF31(#)	60	1	72	37	66	68	13	19.5	5
72QW11,31,32,33, [72QV11,31,32,33]	60	1	72	37	66	68	13	19.5	4
72LW11,31,32,33, [72LV11,31,32,33]	110	1	72	37	66	68	13	20.5	4
ML72,MLC72 (Voltmeter),72LF11(#),72LF31(#), FL72(#)	110	1	72	37	66	68	13	20.5	5
MLC72 (Ammeter)	110	1	72	62	66	68	16	18	-
SQ96 (VOLTMETER & AMMETER UPTO 20A)	97	1	96	51.5	90	92	17	19	-
SQ96 (AMMETER ABOVE 20A)	97	1	96	51.5	90	92	23	19	-
M96 (Above 10A, E=18)	90	1	96	30	90	92	13	19.5	-
96QW11,31,32,33, [96QV11,31,32,33]	90	1	96	102	90	92	16	12	-
96LW11,31,32,33, [96LV11,31,32,33], 96LF11,31,FL96	155								
C96,96QF11,31,F96,M96 (4-20mA DC)	90	1	96	48	90	92	13	19.5	-
ML144,MLC144,144LF11,31,FL144	230	1	144	54	136	138	4	19	-
144LW11,31,32,33 [144LV11,31,32,33]	230	2	144	103	136	138	-	-	-
ML110,MLC110,110LF11,31,FL110	175	3	----As Per Drawing----						-
110LW,11,31,32,33, [110LV11,31,32,33]	175	3							4
ML96 / MLC96 (Above 10A, E=18)	155	1	96	48	90	92	13	22	-

MODELS	SCALE LENGTH (mm)	REFER DRAWING	A	B	C	D	E	F	G	H	I	J	L	O	R	EXT. BOX # DRAWING
MR60,CR60	57	6	60	60	33	24	48	48	51.5	12	-	-	54	4BA	4.5	5 [CR60]
MR65,CR65	68	6	81	81	33	22	64	64	64	12	-	-	67	4BA	4.5	5 [CR65]
MR100,CR100	80	6	100	80	34	21	84	64	64	12	-	7	67	4BA	4.5	5 [CR100]
MR120,CR120	96	6	120	100	38	25	100	80	65	12	-	16	67	4BA	4.5	5 [CR120]

Dimensions (mm)

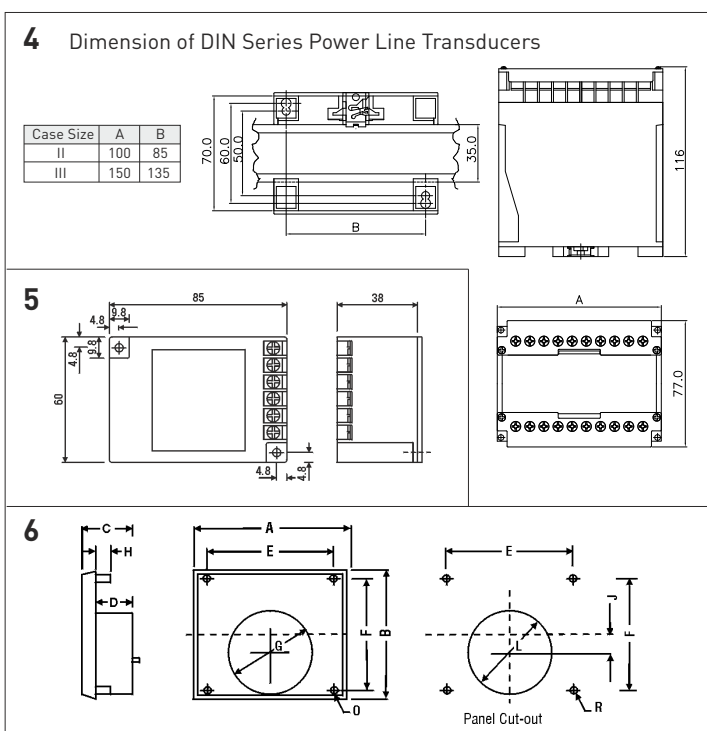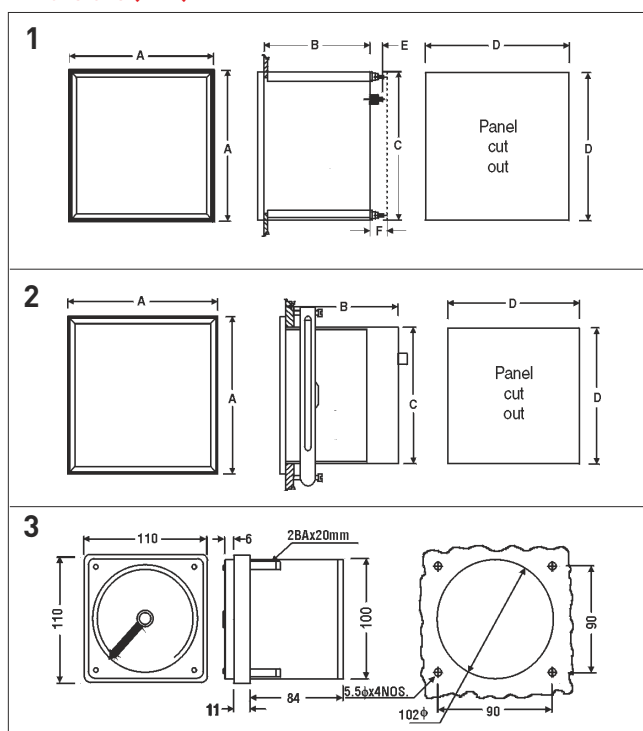

Note : # For ranges greater than 100 mA & upto 5A AC use Models CR60, CR65, CR100, CR120 & C72 with External CT Box supplied with the instruments (Drawing 5).



Digital Multimeters

- ✓ Palm / Pocket Size
- ✓ Professional Type



+60 YEARS
ONE MISSION




Reliable



Long-Lasting



Affordable

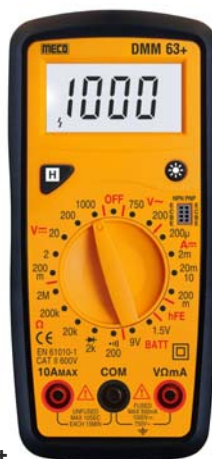
DMM 830L

DMM 63+

DMM 603+

3½ Digit 2000 Counts, Audible Continuity, Diode Test, hFE Test, Backlight & Data Hold

Ranges

DC Voltage 200mV/2/20/200/600V
 Accuracy $\pm(0.5\% \text{ rdg} + 3 \text{ dgt})$ 200mV
 $\pm(0.8\% \text{ rdg} + 5 \text{ dgt})$
 2V, 20V, 200V
 $\pm(1.0\% \text{ rdg} + 5 \text{ dgt})$ 600V

AC Voltage 200/600V [45~450Hz]

Accuracy $\pm (2.0\% \text{ rdg} + 10 \text{ dgt})$

DC Current 200 μ A/2mA/20mA/
 200mA/10A

Accuracy $\pm(1.8\% \text{ rdg} + 2 \text{ dgt})$ 200 μ A,
 2mA, 20mA

$\pm(2.0\% \text{ rdg} + 2 \text{ dgt})$ 200mA
 $\pm(2.0\% \text{ rdg} + 10 \text{ dgt})$ 10A

Resistance 200 Ω /2k Ω /20k Ω /200k Ω /
 2M Ω

Accuracy $\pm(1.0\% \text{ rdg} + 4 \text{ dgt})$ on all
 ranges, except
 $\pm(1\% \text{ rdg} + 10 \text{ dgt})$ on 200 Ω

Sp. Function Audible Continuity,
 Diode Test, hFE Test

Power One 9V Battery

Low Battery "E" is indicated

Battery Life 200 hours typical

Dimensions 145 x 76 x 43mm (approx.)

Weight 207gms Including Battery
 (approx)

Accessories One Pair of Test Leads,
 Battery [installed],
 Instruction Manual &
 Holster

3½ Digit 2000 Counts, Audible Continuity, Diode Test, hFE Test, Backlight, Data Hold & Battery Test

Ranges

DC Voltage 200mV/2/20/200/1000V
 Accuracy $\pm(0.5\% \text{ rdg} + 3 \text{ dgt})$ 200mV
 $\pm(0.8\% \text{ rdg} + 5 \text{ dgt})$
 2V, 20V, 200V
 $\pm(1.0\% \text{ rdg} + 5 \text{ dgt})$ 1000V

AC Voltage 200/750V [45~450Hz]

Accuracy $\pm (2.0\% \text{ rdg} + 10 \text{ dgt})$

DC Current

200 μ A/2mA/20mA/
 200mA/10A

Accuracy $\pm(1.8\% \text{ rdg} + 2 \text{ dgt})$ 200 μ A,
 2mA, 20mA

$\pm(2.0\% \text{ rdg} + 2 \text{ dgt})$ 200mA
 $\pm(2.0\% \text{ rdg} + 10 \text{ dgt})$ 10A

Resistance 200 Ω /2k Ω /20k Ω /200k Ω /
 2M Ω

Accuracy $\pm(1.0\% \text{ rdg} + 4 \text{ dgt})$
 on all ranges, except
 $\pm(1\% \text{ rdg} + 10 \text{ dgt})$ on 200 Ω

Battery Test

Ranges : 1.5V, 9V
 Resolution : 1mV, 10mV
 Internal Resistance :
 10.5 Ω \pm 1.0 Ω , 780 Ω \pm 200 Ω

Sp. Function Audible Continuity, Battery
 Test, Diode Test, hFE Test

Power Two 1.5V "AAA" Battery

Low Battery "E" is indicated

Battery Life 200 hours typical

Dimensions 160 x 76 x 32mm (approx.)

Weight 155gms Including Battery
 (approx)

Accessories One Pair of Test Leads,
 Battery [installed],
 Instruction Manual

3½ Digit 2000 Counts, Audible Continuity, Diode Test, hFE Test, Backlight, Data Hold & APO

Ranges

DC Voltage 200mV/2/20/200/1000V
 Accuracy $\pm(0.5\% \text{ rdg} + 3 \text{ dgt})$ 200mV
 $\pm(0.8\% \text{ rdg} + 5 \text{ dgt})$
 2V, 20V, 200V
 $\pm(1.0\% \text{ rdg} + 5 \text{ dgt})$ 1000V

AC Voltage 200/750V [45~450Hz]

Accuracy $\pm (2.0\% \text{ rdg} + 10 \text{ dgt})$

DC Current

200 μ A/2mA/20mA/
 200mA/20A

Accuracy $\pm(1.8\% \text{ rdg} + 2 \text{ dgt})$ 200 μ A,
 2mA, 20mA

$\pm(2.0\% \text{ rdg} + 2 \text{ dgt})$ 200mA
 $\pm(2.0\% \text{ rdg} + 10 \text{ dgt})$ 20A

AC Current 20mA/200mA/20A
 [45~450Hz]

$\pm(1.8\% \text{ rdg} + 2 \text{ dgt})$ 20mA
 $\pm(2.0\% \text{ rdg} + 2 \text{ dgt})$ 200mA

$\pm(2.0\% \text{ rdg} + 10 \text{ dgt})$ 20A

Resistance 200 Ω /2k Ω /200k Ω /20M Ω
 200M Ω

Accuracy $\pm(1.2\% \text{ rdg} + 8 \text{ dgt})$ on all
 ranges, except
 $\pm(1\% \text{ rdg} + 10 \text{ dgt})$ on 200 Ω

Sp. Function Audible Continuity,
 Diode Test, hFE Test

Power Two 1.5V "AAA" Battery


Low Battery "E" is indicated

Battery Life 200 hours typical

Dimensions 160 x 76 x 32mm (approx.)

Weight 155gms Including Battery
 (approx)

Accessories One Pair of Test Leads,
 Battery [installed],
 Instruction Manual

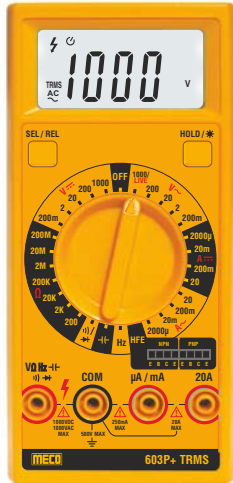

603P+ TRMS



801 JUNIOR



TORCH LIGHT



HOLSTER WITH
MAGNET



TEST LEAD
GRIPPER



603 JUNIOR

TRMS, 3½ Digit 2000 Counts, 17mm Large LCD with Backlight, Audiable Continuity, Diode & hFE Test, Live Test, Capacitance, Frequency, REL Δ, Data Hold, APO

Ranges

DC Voltage 200mV/2/20/200/1000V

Accuracy $\pm(0.5\% \text{rdg} + 3 \text{dgt})$

AC Voltage 200 mV/2/20/200/1000V

Accuracy $\pm(1\% \text{rdg} + 3 \text{dgt})$

AC Response 40Hz ~ 1kHz

DC Current 2000uA/20/200mA/2/20A

Accuracy $\pm(0.8\% \text{rdg} + 3 \text{dgt})$ on all ranges except

$\pm(1.0\% \text{rdg} + 3 \text{dgt})$ on 2/20A

AC Current 2000uA/20/200mA/2/20A

Accuracy $\pm(1.0\% \text{rdg} + 3 \text{dgt})$ on all ranges except

$\pm(1.2\% \text{rdg} + 3 \text{dgt})$ on 2/20A

AC Response 40Hz ~ 1kHz

Resistance 200Ω/2kΩ/20kΩ/200kΩ/

2MΩ/20MΩ/200MΩ

Accuracy $\pm(0.5\% \text{rdg} + 2 \text{dgt})$

on all ranges except

$\pm(1\% \text{rdg} + 3 \text{dgt})$ on 200Ω

$\pm(1.5\% \text{rdg} + 3 \text{dgt})$ on 20MΩ/200MΩ

Capacitance 1.999/19.99/199.9nF/1.999/

19.99/199.9μF

Accuracy $\pm(3.5\% \text{rdg} + 5 \text{dgt})$

on all ranges except

$\pm(5\% \text{rdg} + 20 \text{dgt})$ on 1.999nF

19.99/199.9Hz/1.999/19.99/

199.9KHz

Accuracy $\pm(2\% \text{rdg} + 2 \text{dgt})$

Measuring Category CAT II 1000V, CAT III 600V

Sp. Function Audible Continuity,

Diode Test, hFE Test

Power Two 1.5V "AAA" Battery

Low Battery "E" is indicated

Battery Life 200 hours typical

Dimensions 170 x 80 x 43mm (approx.)

Weight 240gms Including Battery (approx.)

Accessories One Pair of Test Leads,

Carrying Case, Battery (installed), Instruction

Manual and Spare Fuse

TRMS, Auto Ranging, 3% Digits 6000 Counts LCD with Backlight, Torchlight, APO, Capacitance, Frequency, Duty Cycle, NCV (LED, Buzzer & EF Strength), Temperature & Holster with Magnet

Ranges

DC Voltage 60 / 600mV / 6 / 60 / 600 / 1000V

Accuracy $\pm(0.8\% \text{rdg} + 5 \text{dgt})$

AC Voltage 60 / 600mV / 6 / 60 / 600 / 750V (40Hz ~ 1KHz)

Accuracy $\pm(1.0\% \text{rdg} + 10 \text{dgt})$

on 60 / 600mV

$\pm(1.0\% \text{rdg} + 4 \text{dgt})$

on all other ranges

DC Current 60 / 600mA / 6 / 10A

Accuracy $\pm(1.2\% \text{rdg} + 4 \text{dgt})$

on 60 / 600mA

$\pm(3.0\% \text{rdg} + 2 \text{dgt})$ on 6A

$\pm(5.0\% \text{rdg} + 10 \text{dgt})$ on 10A

AC Current 60 / 600mA / 6 / 10A

Accuracy $\pm(1.5\% \text{rdg} + 3 \text{dgt})$

on 60 / 600mA

$\pm(3.0\% \text{rdg} + 5 \text{dgt})$ on 6A

$\pm(5.0\% \text{rdg} + 10 \text{dgt})$ on 10A

40Hz ~ 1KHz

Resistance 600Ω to 60MΩ

Accuracy $\pm(0.8\% \text{rdg} + 5 \text{dgt})$

Capacitance 60.00nF to 100.0mF

Accuracy $\pm(3.0\% \text{rdg} + 5 \text{dgt})$

on all ranges except

$\pm(5.0\% \text{rdg} + 20 \text{dgt})$ on 60nF

$\pm(5.0\% \text{rdg} + 5 \text{dgt})$

on 60.00 / 100.0 mF

60.00Hz to 10.00MHz

Frequency Sensitivity 200mV to 10V AC

Accuracy $\pm(1.5\% \text{rdg} + 5 \text{dgt})$

Duty Cycle 1% ~ 99%

Accuracy $\pm(1.5\% \text{rdg} + 5 \text{dgt})$

Temperature -20°C ~ 1000°C /

-4°F ~ 1832°F

Accuracy $\pm(1.0\% \text{rdg} + 3 \text{dgt})$

Measuring Category CAT II 600V

SP Function Diode Test, Data Hold,

Continuity Test & NCV Test

Manual Ranging, 3½ Digits 2000 Counts LCD with Backlight, Torchlight, APO, NCV (LED, Buzzer & EF Strength), HFE & Holster with Magnet

Ranges

DC Voltage 200mV / 2 / 20 / 200 / 1000V

Accuracy $\pm(0.5\% \text{rdg} + 5 \text{dgt})$

AC Voltage 200 / 750V (40Hz ~ 400Hz)

Accuracy $\pm(1.2\% \text{rdg} + 10 \text{dgt})$

DC Current 200mA / 10A

Accuracy $\pm(1.0\% \text{rdg} + 5 \text{dgt})$

on 200mA

$\pm(3.0\% \text{rdg} + 2 \text{dgt})$ on 10A

AC Current 200mA / 10A (40Hz ~ 400Hz)

Accuracy $\pm(3.0\% \text{rdg} + 2 \text{dgt})$

Resistance 200Ω / 2 / 200KΩ / 2 /

20MΩ

Accuracy $\pm(1.0\% \text{rdg} + 3 \text{dgt})$

Measuring Category CAT II 600V

Sp. Function Diode Test, Data Hold, Continuity Test & NCV Test

Three 1.5V "AAA" Battery

"E" is indicated

Power 200 hours typical

Battery Life 147 x 71 x 45mm (approx.)

Dimensions 230gms Including Battery (approx.)

Weight One Pair of Test Leads,

Spare Fuse (0.2A/250V) x 2,

Holster, Battery (installed) & Instruction Manual

Power Three 1.5V "AAA" Battery

Low Battery "E" is indicated

Battery Life 200 hours typical

Dimensions 147 x 71 x 45mm (approx.)

Weight 230gms Including Battery (approx.)

Accessories One Pair of Test Leads,

Spare Fuse (0.6A/250V) x 2,

Holster, Battery (installed), Instruction Manual & K Type Thermocouple

(upto 260°C)





101P+ TRMS



108P+ TRMS

Pocket Size



TRMS, Auto Ranging, 3½ Digits 4000 Counts LCD with Backlight, APO, Capacitance, REL Δ, Frequency		TRMS, Auto Ranging, 3% Digits 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle, Temperature, NCV, LIVE Test, REL Δ		Resistance	600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ
Ranges		Ranges		Accuracy	± (1.0% rdg + 3 dgt) on 600Ω
DC Voltage	40 / 400mV / 4 / 40 / 400 / 1000V	DC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V		± (0.5% rdg + 2 dgt) on 6 / 60 / 600kΩ / 6MΩ
Accuracy	± (0.5% rdg + 3 dgt)	Accuracy	± (0.5% rdg + 3 dgt)		± (1.5% rdg + 3 dgt) on 60MΩ
AC Voltage	40 / 400mV / 4 / 40 / 400 / 750V	AC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V	Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	± (1.0% rdg + 3 dgt)	Accuracy	± (1.0% rdg + 3 dgt)	Accuracy	± (3.5% rdg + 5 dgt) on all ranges except
AC Response	10Hz ~ 1KHz	AC Response	1Hz ~ 1KHz		± (5.0% rdg + 5 dgt) on 9.999mF
DC Current	400 / 4000μA / 40 / 400mA / 4 / 10A	DC Current	600 / 6000μA / 60 / 600mA / 6 / 10A		± (5.0% rdg + 20 dgt) on 9.999nF
Accuracy	± (0.8% rdg + 3 dgt) on 400 / 4000μA, 40 / 400mA	Accuracy	± (0.8% rdg+3 dgt) on all ranges except	Frequency	99.99Hz ~ 10.00MHz
	± (1.0% rdg + 3 dgt) on 4 / 10A		± (1.0% rdg+3 dgt) on 6 / 10A	Accuracy	±(0.08% rdg + 2 dgt)
AC Current	400 / 4000μA / 40 / 400mA / 4 / 10A	AC Current	600 / 6000μA / 60 / 600mA / 6 / 10A	Duty Cycle	0.1% ~ 99.9%
Accuracy	± (1.0% rdg + 3 dgt) on 400 / 4000μA, 40 / 400mA	Accuracy	± (1.0% rdg+3 dgt) on all ranges except	Accuracy	± (0.08% rdg + 2 dgt)
	± (1.2% rdg + 3 dgt) on 4 / 10A		± (1.2% rdg+3 dgt) on 6 / 10A	Temperature	-20°C ~ 1000°C / -4°F ~ 1832°F
AC Response	10Hz ~ 1KHz	AC Response	1Hz ~ 1KHz	Accuracy	±(1.0% rdg + 5 dgt) on <400°C / <752°F
Resistance	400Ω / 4 / 40 / 400KΩ / 4 / 40MΩ				±(1.5% rdg + 15 dgt) on >400°C / >752°F
Accuracy	± (0.5% rdg + 3 dgt) on all ranges except			Measuring Category	CAT III 600V, CAT II 1000V
	± (1.0% rdg + 3 dgt) on 400Ω	Sensitivity	1V to 36V AC	SP Function	NCV Test, LIVE Test, Diode Test, Audible Continuity, Data Hold
	± (1.5% rdg + 3 dgt) on 40MΩ	Accuracy	±(1.5% rdg + 3 dgt)	Power	Two 1.5V 'AAA' Battery
Capacitance	4.000 / 40.00 / 400.0nF / 4.000 / 40.00 / 400.0μF / 4.000mF	Measuring Category	CAT III 600V, CAT II 1000V	Low Battery	'  ' is indicated
Accuracy	± (3.5% rdg + 4 dgt) on all ranges except	SP Function	Diode Test, Audible Continuity, Data Hold	Battery Life	200 hours typical
	± (5.0% rdg + 5 dgt) on 4mF	Power	Two 1.5V 'AAA' Battery	Dimensions	142 x 68 x 36mm (approx.)
	± (5.0% rdg + 50 dgt) on 4.000nF, 40.00nF	Low Battery	'  ' is indicated	Weight	173gms Including Battery (approx.)
Frequency	4.000 / 40.00 / 400.0Hz / 4.000 / 40.00 / 400.0KHz / 4.000MHz	Battery Life	200 hours typical	Accessories	One Pair of Test Leads, Battery (installed), Carrying Case, Instruction Manual & K Type Thermocouple (upto 260°C)
		Dimensions	142 x 68 x 36mm (approx.)		
		Weight	173gms Including Battery (approx.)		
		Accessories	One Pair of Test Leads, Battery (installed), Carrying Case & Instruction Manual		



153B+TRMS



171B+TRMS

TRMS, Auto Ranging, 3% Digits 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Holster Ranges DC Voltage 60 / 600mV / 6 / 60 / 600 / 1000V Accuracy ± (1.0% rdg + 4 dgt) on 60 / 600mV ± (0.5% rdg + 2 dgt) on 6 / 60 / 600V ± (1.0% rdg + 3 dgt) on 1000V TRMS AC Voltage 60 / 600mV / 6 / 60 / 600 / 750V Accuracy ± (1.0% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 60 / 600mV ± (1.5% rdg + 5 dgt) on 750V AC Response 40Hz ~ 1KHz DC Current 600 / 6000μA / 60 / 600mA / 6 / 20A Accuracy ± (1.0% rdg + 2 dgt) on 600 / 6000μA ± (1.2% rdg + 3 dgt) on 60 / 600mA ± (1.5% rdg + 5 dgt) on 6 / 20A TRMS AC Current 600 / 6000μA / 60 / 600mA / 6 / 20A Accuracy ± (1.5% rdg + 5 dgt) on 600 / 6000μA ± (2.0% rdg + 5 dgt) on 60 / 600mA ± (2.5% rdg + 5 dgt) on 6 / 20A AC Response 40Hz ~ 1KHz Resistance 600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ Accuracy ± (1.2% rdg + 2 dgt) on 600Ω & 6MΩ ± (1.0% rdg + 2 dgt) on 6 / 60 / 600kΩ ± (1.5% rdg + 2 dgt) on 60MΩ Capacitance 9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF Accuracy ± (2.0% rdg + 4 dgt) on all ranges except ± (3.0% rdg + 4 dgt) 9.999mF		TRMS, Auto / Manual, 3% Digits 6000 Counts LCD with Backlight, APO, Capacitance, REL Δ, Max / Min, Frequency, Duty Cycle, Temperature & Holster Ranges DC Voltage 60 / 600mV / 6 / 60 / 600 / 1000V Accuracy ± (1.0% rdg + 4 dgt) on 60 / 600mV ± (0.5% rdg + 2 dgt) on 6 / 60 / 600V ± (1.0% rdg + 3 dgt) on 1000V TRMS AC Voltage 60 / 600mV / 6 / 60 / 600 / 750V Accuracy ± (1.0% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 60 / 600mV ± (1.5% rdg + 5 dgt) on 750V AC Response 40Hz ~ 1KHz DC Current 600 / 6000μA / 60 / 600mA / 6 / 20A Accuracy ± (1.0% rdg + 2 dgt) on 600 / 6000μA ± (1.2% rdg + 3 dgt) on 60 / 600mA ± (1.5% rdg + 5 dgt) on 6 / 20A TRMS AC Current 600 / 6000μA / 60 / 600mA / 6 / 20A Accuracy ± (1.0% rdg + 2 dgt) on 600 / 6000μA ± (1.2% rdg + 3 dgt) on 60 / 600mA ± (1.5% rdg + 5 dgt) on 6 / 20A Frequency 99.99Hz ~ 10.00MHz Sensitivity 1V ~ 36V AC Accuracy ±(0.05% rdg + 4 dgt) Duty Cycle 0.1% ~ 99.9% Sensitivity 1V ~ 36V AC Accuracy ± (0.05% rdg + 4 dgt) Measuring Category CAT III 1000V, CAT IV 600V SP Function Diode Test, Audible Continuity, Data Hold Power Two 1.5V 'AA' Battery Low Battery '⚡' is indicated Battery Life 200 hours typical Dimensions 180 x 90 x 52mm (approx.) Weight 370gms Including Battery (app.) Accessories One Pair of Test Leads, Holster, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)		Accuracy ± (1.5% rdg + 5 dgt) on 600 / 6000μA ± (2.0% rdg + 5 dgt) on 60 / 600mA ± (2.5% rdg + 5 dgt) on 6 / 20A AC Response 40Hz ~ 1KHz Resistance 600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ Accuracy ± (1.2% rdg + 2 dgt) on 600Ω & 6MΩ ± (1.0% rdg + 2 dgt) on 6 / 60 / 600kΩ ± (1.5% rdg + 2 dgt) on 60MΩ Capacitance 9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF Accuracy ± (2.0% rdg + 4 dgt) on all ranges except ± (3.0% rdg + 4 dgt) on 9.999mF Frequency 99.99Hz ~ 10.00MHz Accuracy ±(0.05% rdg + 4 dgt) Duty Cycle 0.1% ~ 99.9% Accuracy ± (0.05% rdg + 4 dgt) Temperature -40°C ~ 1000°C / -40°F ~ 1832°F Accuracy ± (3.0% rdg + 4 dgt) on -40°C ~ 0°C / -40°F ~ 32°F ± (1.0% rdg + 3 dgt) on 0°C ~ 400°C / 32°F ~ 750°F ± (2.0% rdg + 5 dgt) on 400°C ~ 1000°C / 750°F ~ 1832°F Measuring Category CAT III 1000V, CAT IV 600V SP Function Diode Test, Audible Continuity, Data Hold Power Two 1.5V 'AA' Battery Low Battery '⚡' is indicated Battery Life 200 hours typical Dimensions 180 x 90 x 52mm (approx.) Weight 370gms Including Battery (approx.) Accessories One Pair of Test Leads, Holster, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)	
--	--	---	--	---	--



450B+TRMS



45CF+



1) Above 60.00 V DC



2) Above 36.00 V AC

Red Backlight for High Voltage Alert

TRMS, Auto / Manual, 4½ Digit 20000 Count LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle, DATA HOLD, MIN / MAX, Δ ZERO / REL, Diode Test, Audible Continuity & NCV Ranges		TRMS, Manual Ranging, 4 Digits 9999 Counts Digital Dual Display LCD with Auto Backlight, APO, Resistance, Capacitance, hFE, LoZ, $\bar{\omega}$V, Frequency, Duty Cycle, Infrared Remote Control Check, Δ REL, Data Hold, Max/Min, Red & Green Light Indication for Input Terminal Selection, NCV, Torchlight & Bargraph	
DC Voltage	19.999 / 199.99mV / 1.9999 / 19.999 / 199.99 / 1000.0V	DC Voltage	999.9mV / 9.999 / 99.99 / 999.9V
Accuracy	±(0.5% rdg + 3 dgt)	Accuracy	± (0.5% rdg + 5 dgt) on all ranges except ± (0.8% rdg + 5 dgt) on 999.9V
AC Voltage	19.999 / 199.99mV / 1.9999 / 19.999 / 199.99 / 750.0V	AC Voltage	999.9mV / 9.999 / 99.99 / 750.0V
Accuracy	± (1.0% rdg + 3 dgt)	Accuracy	± (1.0% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 750.0V
AC Response	40Hz ~ 1KHz	AC Response	10Hz ~ 1KHz
DC Current	199.99 / 1999.9μA / 19.999 / 199.99mA / 1.9999 / 10.000A	DC Current	999.9μA / 99.99 / 999.9mA / 9.999A
Accuracy	± (0.8% rdg + 3 dgt) on 199.99 / 1999.9μA ± (1.0% rdg + 3 dgt) on all other ranges		
AC Current	199.99 / 1999.9μA / 19.999 / 199.99mA / 1.9999 / 10.000A		
Accuracy	± (1.0% rdg + 3 dgt) on 199.99 / 1999.9μA ± (1.2% rdg + 3 dgt) on all other ranges		
AC Response	40Hz ~ 1KHz		
Resistance	199.99Ω / 1.9999 / 19.999 / 199.99kΩ / 1.9999 / 19.999MΩ		
Accuracy	± (1.0% rdg + 3 dgt) on 199.99Ω ± (0.5% rdg + 3 dgt) on 1.9999 / 19.999 / 199.99kΩ ± (1.5% rdg + 3 dgt) on 1.9999 / 19.999MΩ ± (3% rdg + 5 dgt) on 199.99MΩ		
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF		
Accuracy	± (5.0% rdg + 20 dgt) on 9.999nF ± (2.0% rdg + 5 dgt) on 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF		
Frequency	± (5.0% rdg + 5 dgt) on 9.999mF 99.99 / 999.9Hz / 9.999 / 99.99 / 999.9KHz / 9.999MHz		
Accuracy	± (0.1% rdg + 2 dgt)		
Duty Cycle	1% ~ 99%		
Accuracy	± (0.1% rdg + 2 dgt)		
Sp. Function	Diode Test, Audible Continuity, Data Hold		
Power	Two 1.5V 'AA' Battery		
Low Battery	' $\bar{\omega}$ ' is indicated		
Battery Life	200 hours typical		
Dimensions	161 x 81 x 39 mm (approx.)		
Weight	230gms Including Battery (approx.)		
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Drawstring Pouch		
Accuracy	± (1.2% rdg + 5 dgt) on all ranges except ± (2.0% rdg + 5 dgt) on 9.999A	AC Current	99.99 / 999.9mA / 9.999A
		Accuracy	± (1.5% rdg + 5 dgt) on all ranges except ± (2.0% rdg + 5 dgt) on 9.999A
		AC Response	40Hz ~ 1KHz
		Resistance	999.9Ω / 9.999 / 99.99 / 999.9kΩ / 9.999 / 99.99MΩ
		Accuracy	± (0.8% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 99.99MΩ
		Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999 / 99.99mF
		Accuracy	± (4.0% rdg + 5 dgt) on all ranges except ± (5.0% rdg + 5 dgt) on 9.999 / 99.99mF
		Frequency	9.99Hz ~ 9.99MHz
		Accuracy	± (1.5% rdg + 5 dgt)
		Duty Cycle	0.1% ~ 99.9%
		Accuracy	± (1.5% rdg + 5 dgt)
		Temperature	-55°C ~ 1000°C / -67°F ~ 1832°F
		Accuracy	± (1.0% rdg + 3 dgt)
		Loz	750V AC / 1000V DC
		Accuracy	± (2.0% rdg + 5 dgt)
		Measuring Category	CAT II 1000V, CAT III 600V
		SP Function	Diode Test, Audible Continuity
		Power	Three 1.5V 'AAA' Battery
		Low Battery	' $\bar{\omega}$ ' is indicated
		Battery Life	200 hours typical
		Dimensions	187 x 95 x 55 mm (approx.)
		Weight	350gms Including Battery (approx.)
		Accessories	One Pair of Test Leads, Holster, Battery (installed), Instruction Manual, Carrying Case & K Type Thermocouple (upto 260°C)



135P+



LCR99



1) Above 60.00V DC



2) Above 36.00V AC

Red Backlight for High Voltage Alert

TRMS, Auto / Manual, 4 Digits 9999 Counts Digital Dual Display LCD with Backlight, APO, Resistance, Capacitance, Frequency, Duty Cycle, ΔREL, Data Hold, Max/Min, Peak, Red & Green Light Indication for Input Terminal Selection, NCV, Torchlight & Bargraph

DC Voltage	99.99 / 999.9mV / 9.999 / 99.99 / 999.9V
Accuracy	± (0.5% rdg + 5 dgt) on all ranges except ± (0.8% rdg + 5 dgt) on 999.9V
AC Voltage	99.99 / 999.9mV / 9.999 / 99.99 / 750.0V
Accuracy	± (1.0% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 750.0V
AC Response	10Hz ~ 1KHz
DC Current	999.9μA / 999.9mA / 9.999A
Accuracy	± (1.2% rdg + 5 dgt) on 999.9μA, 999.9mA ± (2.0% rdg + 5 dgt) on 9.999A
AC Current	999.9μA / 999.9mA / 9.999A
Accuracy	± (1.5% rdg + 5 dgt) on 999.9μA, 999.9mA ± (2.0% rdg + 5 dgt) on 9.999A
AC Response	40Hz ~ 1KHz
Resistance	999.9Ω / 9.999 / 99.99 / 999.9KΩ / 9.999 / 99.99MΩ
Accuracy	± (0.8% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 99.99MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999 / 99.99mF
Accuracy	± (4.0% rdg + 5 dgt) on all ranges except ± (5.0% rdg + 5 dgt) on 9.999 / 99.99mF
Frequency	9.99Hz ~ 9.99MHz
Accuracy	± (1.5% rdg + 5 dgt)

TRMS, Auto / Manual, 4 Digits 9999 Counts Digital Dual Display LCD with Auto Backlight, APO, Resistance, Capacitance, Inductance, Frequency, Duty Cycle, ΔREL, Data Hold, Max/Min, Peak, Red & Green Light Indication for Input Terminal Selection, NCV, Torchlight & Bargraph

DC Voltage	99.99 / 999.9mV / 9.999 / 99.99 / 999.9V
Accuracy	± (0.5% rdg + 5 dgt) on all ranges except ± (0.8% rdg + 5 dgt) on 999.9V
AC Voltage	99.99 / 999.9mV / 9.999 / 99.99 / 750.0V
Accuracy	± (1.0% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 750.0V
AC Response	10Hz ~ 1KHz
DC Current	999.9 / 999.9mA / 9.999A
Accuracy	± (1.2% rdg + 5 dgt)

Duty Cycle	0.1% ~ 99.9%
Accuracy	± (1.5% rdg + 5 dgt)
Temperature	-55°C ~ 1000°C / -67°F ~ 1832°F
Accuracy	± (1.0% rdg + 3 dgt)
Measuring Category	CAT II 1000V, CAT III 600V
SP Function	Diode Test, Audible Continuity
Power	Three 1.5V 'AAA' Battery
Low Battery	'E' is indicated
Battery Life	200 hours typical
Dimensions	187 x 95 x 55 mm (approx.)
Weight	350gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Holster, Battery (installed), Instruction Manual, Carrying Case & K Type Thermocouple (upto 260°C)

AC Current	99.99 / 999.9mA / 9.999A
Accuracy	± (1.5% rdg + 5 dgt) on 99.99 / 999.9mA ± (2.0% rdg + 5 dgt) on 9.999A
AC Response	40Hz ~ 1KHz
Resistance	999.9Ω / 9.999 / 99.99 / 999.9KΩ / 9.999 / 99.99MΩ
Accuracy	± (0.8% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 99.99MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999 / 99.99mF
Accuracy	± (4.0% rdg + 5 dgt) on all ranges except ± (5.0% rdg + 5 dgt) on 9.999 / 99.99mF
Inductance	9.999mH ~ 99.99H
Accuracy	± (4.0% rdg + 5 dgt)
Frequency	9.99Hz ~ 9.99MHz
Accuracy	± (1.5% rdg + 5 dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (1.5% rdg + 5 dgt)
Temperature	-55°C ~ 1000°C / -67°F ~ 1832°F
Accuracy	± (1.0% rdg + 3 dgt)
Measuring Category	CAT II 1000V, CAT III 600V
SP Function	Diode Test, Audible Continuity
Power	Three 1.5V 'AAA' Battery
Low Battery	'E' is indicated
Battery Life	200 hours typical
Dimensions	187 x 95 x 55 mm (approx.)
Weight	350gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Holster, Battery (installed), Instruction Manual, Carrying Case & K Type Thermocouple (upto 260°C)



9A06



801AUTO

Auto / Manual, 3½ Digit, 2000 Counts LCD, APO & Temperature		Auto / Manual, 3¾ Digit, 4000 Counts LCD, APO, Capacitance, Frequency, Duty Cycle & Temperature		Accessories	
Ranges		Ranges		One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case	
DC Voltage	200mV/2/20/200/1000V	DC Voltage	400mV/4/40/400/1000V		
Accuracy	± [0.5%rdg + 4dgt] on 200mV & 2V, ± [0.7%rdg + 4dgt] on 20V & 200V, ± [1%rdg + 4dgt] on 1000V	Accuracy	± [0.5% rdg + 4 dgt] on 400mV/4V ± [0.7% rdg + 4 dgt] on 40/ 400V ± [1.0% rdg + 4 dgt] on 1000V	Accessories	
AC Voltage	200mV/2/20/200/750V (200mV Manual only)	AC Voltage	4/40/400/750V	K Type Bead Probe (upto 260°C) Model : TPK-B	
Accuracy	± [1.0%rdg + 8dgt] on all ranges except ± [1.5%rdg + 8dgt] on 750V	Accuracy	± [1.0% rdg + 5 dgt] on all ranges except ± [1.5% rdg + 8 dgt] on 750V	K Type Stick Probe (upto 500°C) Model : TP-02	
DC Current	200/2000µA/20/200mA/ 2/10A	DC Current	400/4000µA/40/400mA/ 4/20A	Pair of Test Leads suitable for DMM/DTT Model : TL-DMM/DTT	
Accuracy	± [1.5%rdg + 4dgt]	Accuracy	± [1.5% rdg + 4 dgt]	Pair of Test Leads suitable for Insulation Tester Model : TL-IT	
AC Current	200/2000µA/20/200mA/ 2/10A	AC Current	400/4000µA/40/400mA/ 4/20A		
Accuracy	± [2.2%rdg + 4dgt]	Accuracy	± [2.2% rdg + 4 dgt]		
Resistance	200Ω/2/20/200kΩ/2/20MΩ	Resistance	400Ω/4/40/400kΩ/4/40MΩ		
Accuracy	± [0.7%ordg + 4dgt] on all ranges except ± [1.2%rdg + 4dgt] on 2MΩ ± [2.5%rdg + 4dgt] on 20MΩ	Accuracy	± [0.7% rdg + 4 dgt] on all ranges except ± [1.2% rdg + 4 dgt] on 4MΩ ± [2.5% rdg + 4 dgt] on 40MΩ		
Temperature	-20°C-1300°C / -4°F-1999°F	Capacitance	40/400nF/4/40/100µF		
Accuracy	± [2%rdg + 4dgt]	Accuracy	± [5.0% rdg + 10 dgt]		
Measuring Category	CAT II	Frequency	9.999Hz ~9.999MHz		
Sp. Function	Diode Test, Audible Continuity, Data Hold	Accuracy	± [0.5% rdg + 2 dgt]		
Power	Two 1.5V 'AA' Battery	Duty Cycle	0.1% ~ 99.9%		
Low Battery	"E" Indicated	Accuracy	± [0.5% rdg + 2 dgt]		
Battery Life	200 hours typical	Temperature	-20°C-1300°C		
Dimensions	161 x 86 x 43 mm (approx.)	Accuracy	± [2% rdg + 4 dgt]		
Weight	250gms Including Battery (approx.)	Measuring Category	CAT II		
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case	Sp. Function	Diode Test, Audible Continuity, Data Hold		
		Power	Two 1.5V 'AA' Battery		
		Low Battery	"E" is indicated		
		Battery Life	200 hours typical		
		Dimensions	161 x 86 x 43 mm (approx.)		
		Weight	250gms Including Battery (approx.)		



Digital Clampmeters / Tong Testers

- ✓ AC – Small
- ✓ AC / TRMS
- ✓ DC / AC - Small
- ✓ DC / AC / TRMS



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable


27-AUTO BL

27T-AUTO BL

2502T-AUTO BL

600A AC TRMS

Auto Ranging, 3½ Digit, 2000 Counts, Data Hold, Max, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges

AC Current	2A, 20A, 200A, 600A (Auto Ranging)
Accuracy	±(3%rdg+5dgt) on 2A ±(2%rdg+3dgt) on 20A ±(2%rdg+5dgt) on 200A & 600A
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
DC Voltage	200mV, 2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Safety Standard	CAT II 600V
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Low Battery	" " is indicated
Battery Life	200 Hours Typical
Dimension Weight	185 x 65 x 28 mm (approx.) 170gms Including Battery (approx.)
Jaw Opening	Cable Dia. 25mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

600A AC TRMS

Auto Ranging, 3½ Digit, 2000 Counts, Temperature, Data Hold, Max, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges

AC Current	2A, 20A, 200A, 600A (Auto Ranging)
Accuracy	±(3%rdg+5dgt) on 2A ±(2%rdg+3dgt) on 20A ±(2%rdg+5dgt) on 200A & 600A
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
DC Voltage	200mV, 2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Safety Standard	CAT II 600V
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Low Battery	" " is indicated
Battery Life	200 Hours Typical
Dimension Weight	185 x 65 x 28 mm (approx.) 170gms Including Battery (approx.) Cable Dia .25mm (max.)
Jaw Opening	
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C)

1000A AC TRMS

Auto / Manual, 3½ Digit, 2000 Counts, APO Temperature, Data Hold, Max, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength)

Ranges

AC Current	2A, 20A, 200A, 1000A
Accuracy	±(3%rdg+5dgt) on 2A & 20A ±(2%rdg+5dgt) on 200A & 1000A
AC Response	40Hz ~ 1KHz
Overload	1000A AC max. for 1 min.
DC Voltage	200mV, 2V, 20V, 200V, 1000V
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	2V, 20V, 200V, 750V
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ
Accuracy	±(1.2%rdg+3dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Safety Standard	CAT III 600V
Audible Continuity	30Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AA' Battery
Low Battery	" " is indicated
Battery Life	200 Hours Typical
Dimension Weight	245 x 95 x 35 mm (approx.) 309gms Including Battery (approx.)
Jaw Opening	Cable Dia. 52mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C)


72-AUTO BL

72T-AUTO BL

2520THz-AUTO BL
600A AC TRMS

Auto Ranging, 3½ Digit, 4000 Counts, Data Hold, Rel.Test, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges

AC Current	40A, 400A, 600A (Auto Ranging)
Accuracy	±(2.5%rdg+5dgt)
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	400Ω, 4kΩ, 40KΩ, 400kΩ, 4MΩ, 40MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Frequency	4Hz ~ 1MHz (Auto Ranging)
Accuracy	±(0.5%rdg+2dgt)
Safety Standard	CAT II 600V
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Low Battery	""/> is indicated
Battery Life	200 Hours Typical
Dimension	185 x 65 x 28 mm (approx.)
Weight	170gms Including Battery (approx.)
Jaw Opening	Cable Dia. 25mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

600A AC TRMS

Auto Ranging, 3½ Digit, 4000 Counts, Temperature, Capacitance, Data Hold, Rel.Test, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges

AC Current	40A, 400A, 600A (Auto Ranging)
Accuracy	±(2.5%rdg+5dgt)
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	400Ω, 4kΩ, 40KΩ, 400kΩ, 4MΩ, 40MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Capacitance	5nF, 50nF, 500nF, 5μF, 50μF, 200μF
Accuracy	±(3%rdg+2dgt)
Frequency	4Hz ~ 1MHz (Auto Ranging)
Accuracy	±(0.5%rdg+2dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Safety Standard	CAT II 600V
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Low Battery	""/> is indicated
Battery Life	200 Hours Typical
Dimension	185 x 65 x 28 mm (approx.)
Weight	170gms Including Battery (approx.)
Jaw Opening	Cable Dia. 25mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C)

1000A AC TRMS

Auto / Manual, 3½ Digit, 6000 Counts, Temperature, Capacitance, Data Hold, Backlight, Hz/ Duty, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges

AC Current	60A, 600A, 1000A
Accuracy	±(2.5%rdg+5dgt)
AC Response	40Hz ~ 1KHz
Overload	1000A AC max. for 1 min.
DC Voltage	600mV, 6V, 60V, 600V, 1000V
Accuracy	±(0.8%rdg+3dgt)
AC Voltage	6V, 60V, 600V, 750V
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
Resistance	600Ω, 6kΩ, 60KΩ, 600kΩ, 6MΩ, 60MΩ
Accuracy	±(1.2%rdg+3dgt)
Capacitance	6nF, 60nF, 600nF, 6μF, 60μF, 600μF (Auto Ranging)
Accuracy	±(3%rdg+7dgt)
	>6μF ±(5%rdg+5dgt)
	>100μF Not Applicable
Frequency	10Hz ~ 10MHz (Auto Ranging)
Accuracy	±(0.5%rdg+2dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	±(0.5%rdg+2dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Safety Standard	CAT III 600V
Audible Continuity	30Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AA' Battery
Low Battery	""/> is indicated
Battery Life	200 Hours Typical
Dimension	245 x 95 x 35 mm (approx.)
Weight	309gms Including Battery (approx.)
Jaw Opening	Cable Dia. 52mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C)



DT 2727+



54+



90+

400A AC TRMS

3½ Digit, 1999 Counts, NCV (Buzzer & EF Strength), Data Hold, Backlight & APO

Ranges

AC Current 400A

Accuracy $\pm (2.5\%rdg + 10dgt)$
(50 ~ 60Hz)

Overload 400A AC max. for 1 min.

DC Voltage 600V

Accuracy $\pm (1.0\%rdg + 5dgt)$

AC Voltage 600V

Accuracy $\pm (1.2\%rdg + 8dgt)$
(50 ~ 60Hz)

Resistance 2MΩ

Accuracy $\pm (1.5\%rdg + 3dgt)$

Sp. Function Audible Continuity,
Diode Test

Power Two 1.5V "AAA" Battery

Low Battery "E" is indicated

Battery Life 200 Hours Typical

Dimension 175 x 60 x 34 mm (approx.)

Weight 150gms Including Battery
(approx.)

Jaw Opening Cable Dia. 23mm (max.)

Accessories One Pair of Test Leads,
Carrying Case,
Battery (installed)
Instruction Manual

600A AC TRMS

Auto Ranging, 3¾ Digit, 4000 Counts,
Capacitance, Data Hold, Backlight,
Torchlight, NCV (LED, Buzzer & EF
Strength), APO

Ranges

AC Current 4A, 40A, 400A, 600A
(Auto Ranging)

Accuracy $\pm (2.0\%rdg + 5dgt)$ on all
ranges except
 $\pm (3.0\%rdg + 5dgt)$ on 4A

AC Response 40Hz ~ 2KHz

Overload 600A AC max. for 1 min.

DC Voltage 400mV, 4V, 40V, 400V, 600V
(Auto Ranging)

Accuracy $\pm (0.8\%rdg + 5dgt)$

AC Voltage 4V, 40V, 400V, 600V
(Auto Ranging)

Accuracy $\pm (1.2\%rdg + 5dgt)$

AC Response 40Hz ~ 2KHz

Resistance 400Ω, 4kΩ, 40KΩ, 400kΩ,
4MΩ, 40MΩ (Auto Ranging)

Accuracy $\pm (1.2\%rdg + 5dgt)$

Capacitance 4nF, 40nF, 400nF, 4μF,
40μF, 400μF, 4mF (Auto)

Accuracy $\pm (3\%rdg + 5dgt)$

Safety Standard CAT II 600V

Audible Continuity 50Ω (approx.)

Diode Test 1.0 \pm 0.6mA (approx.)

Power Two 1.5V 'AAA' Battery

Low Battery "E" is indicated

Battery Life 200 Hours Typical

Dimension 190 x 71 x 30 mm (approx.)
190gms Including Battery
(approx.)

Jaw Opening Cable Dia. 30mm (max.)

Accessories One Pair of Test Leads,
Instruction Manual,
Carrying Case,
Battery (installed)

600A AC TRMS

Auto Ranging, 3¾ Digit, 4000 Counts,
Temperature, Capacitance, Data Hold,
Backlight, Torchlight, NCV (LED, Buzzer
& EF Strength), APO

Ranges

AC Current 4A, 40A, 400A, 600A
(Auto Ranging)

Accuracy $\pm (2.0\%rdg + 5dgt)$ on all
ranges except
 $\pm (3.0\%rdg + 5dgt)$ on 4A

AC Response 40Hz ~ 2KHz

Overload 600A AC max. for 1 min.

DC Voltage 400mV, 4V, 40V, 400V, 600V
(Auto Ranging)

Accuracy $\pm (0.8\%rdg + 5dgt)$

AC Voltage 4V, 40V, 400V, 600V
(Auto Ranging)

Accuracy $\pm (1.2\%rdg + 5dgt)$

AC Response 40Hz ~ 2KHz

Resistance 400Ω, 4kΩ, 40KΩ, 400kΩ,
4MΩ, 40MΩ (Auto Ranging)

Accuracy $\pm (1.2\%rdg + 5dgt)$

Capacitance 4nF, 40nF, 400nF, 4μF,
40μF, 400μF, 4mF

Accuracy $\pm (3\%rdg + 5dgt)$

Note : 4nF for Reference only

Frequency 4Hz ~ 4KHz (Auto Ranging)

Accuracy $\pm (0.5\%rdg + 5dgt)$

Temperature -20°C to 1000°C /
-4°F to 1832°F

Accuracy $\pm (3\%rdg + 5dgt)$

Safety Standard CAT II 600V

Audible Cont. 50Ω (approx.)

Diode Test 1.0 \pm 0.6mA (approx.)

Power Two 1.5V 'AAA' Battery

Low Battery "E" is indicated

Battery Life 200 Hours Typical

Dimension 190 x 71 x 30 mm (approx.)

Weight 190gms Including Battery
(approx.)

Jaw Opening Cable Dia. 30mm (max.)

Accessories One Pair of Test Leads,
Instruction Manual,
Carrying Case,
Battery (installed) K Type
Thermocouple (upto 260°C)



Pair of Test Leads
Suitable for DMM /
DTT (Optional)

Model :
TL-DMM / DTT (N)
Category : CAT III
Max. Voltage : 1000V
Max. Current : 10A
(Upto 1 min.)
Length : 1000mm
(approx.)



2250 Jr



2250-Hz AUTO



1008-TRMS

1000A AC TRMS

Manual Ranging, 3½ Digit, 1999 Counts, Data Hold, Torchlight, Backlight, NCV (LCD, Buzzer & EF Strength), Live Test, APO

Ranges
AC Current 20A, 200A, 1000A

Accuracy ±(2.0%rdg+5dgt) on 20A/200A

±(2.5%rdg+8dgt) on 1000A

AC Response 45Hz ~ 450Hz

Overload 1000A AC max. for 1 min.

DC Voltage 1000V

Accuracy ±(1.5%rdg+8dgt)

AC Voltage 1000V

±(1.5%rdg+8dgt)

AC Response 45Hz ~ 450Hz

Resistance 200Ω, 2kΩ

Accuracy ±(1.0%rdg+5dgt)

Over Volt Protection 250V DC or AC RMS

Audible Cont. 50Ω (approx.)

Over Volt Protection 250V DC or AC RMS

Diode Test 1.0 ± 0.6mA (approx.)

Over Volt Protection 250V DC or AC RMS

Power Two 1.5V 'AAA' Battery

Low Battery "⬮" is indicated

Battery Life 200 Hours Typical

Dimension 241 x 89 x 43 mm (approx.)

Weight 281gms Including Battery (approx.)

Jaw Opening Cable Dia. 38mm (max.)

Accessories One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

1000A AC TRMS

Auto Ranging, 3¾ Digit, 4200 Counts, Data Hold, Frequency, Duty Cycle, APO

Ranges
AC Current 4A, 40A, 400A, 1000A

Accuracy ±(3%rdg+4dgt) on 4A/40A

±(2%rdg+4dgt) on 400A, 1000A

AC Response 40Hz ~ 1KHz

Overload 1000A AC max. for 1 min.

DC Voltage 4V, 40V, 400V, 1000V (Auto)

Accuracy ±(0.5%rdg+4dgt) on 4V

±(0.7%rdg+4dgt) on 40V & 400V

±(1 %rdg+4dgt) on 1000V

AC Voltage 4V, 40V, 400V, 750V (Auto)

Accuracy ±(1.0%rdg+8dgt) on all ranges except

±(1.5%rdg+8dgt) on 750V

AC Response 40Hz ~ 1KHz

Resistance 400Ω ~ 40MΩ (Auto)

Accuracy ±(0.7%rdg+4dgt) on all ranges except

±(1.2%rdg+4dgt) on 4MΩ

±(2.5%rdg+4dgt) on 40MΩ

600V DC or AC RMS

Frequency 9.999Hz to 9.999MHz (Auto)

% Duty Cycle 1% to 90% (Auto)

Accuracy ±(0.5%rdg+2dgt)

Protection 600V DC or AC RMS

Continuity 40Ω (approx.)

Protection 600V DC or AC RMS

Diode Test 1.0 ± 0.6mA (approx.)

Protection 600V DC or AC RMS

Power Two 1.5V 'AAA' Battery

Low Battery "⬮" is indicated

Battery Life 200 Hours Typical

Dimension 250 x 98 x 35 mm (approx.)

Weight 375gms Including Battery (approx.)

Jaw Opening Cable Dia. 55mm (max.)

Accessories One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

1000A AC TRMS

Auto / Manual, 3% Digit, 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Temperature

Ranges
AC Current 600/6000μA / 600 / 1000A

Accuracy ± (2.0% rdg + 30dgt)

AC Response 40 Hz ~ 1000Hz

Overload 1000A AC Max. for 1min. (A)

DC Voltage 600mV/6/60/600/1000V

Accuracy ± (0.5%rdg + 3dgt)

AC Voltage 600mV/6/60/600/750V

Accuracy ± (1.0% rdg + 5dgt)

AC Response 40Hz ~ 1000Hz

DC Current 600/6000μA

Accuracy ± (0.8% rdg + 10dgt)

Resistance 600Ω/6/60/600kΩ/6/60MΩ

Accuracy ± (0.8% rdg + 5dgt) on 600Ω

± (0.8% rdg + 3dgt) on 6/60/600kΩ/6MΩ

± (1.0% rdg + 25dgt) (60MΩ)

9.999/99.99/999.9nF/9.999/99.99/999.9μF/9.999mF

Accuracy ± (3.5% rdg + 60dgt) on all ranges except

± (5.0% rdg + 10dgt) on 999.9μF & 9.999mF

99.99Hz ~ 10.00MHz

0.1% ~ 99.9%

Accuracy ± (0.01% rdg + 3dgt)

Temperature -20°C ~ 1000°C / 0°F ~ 1832°F

HVAC Flame 600.0μA / 6000μA

Sensors ± (1% rdg + 20 dgt)

Accuracy CAT IV 600V

Safety Diode Test, Audible

Sp. Function Continuity, Data Hold

Power Two 1.5V 'AA' Battery

Low Battery "⬮" is indicated

Battery Life 200 hours typical

Dimension 238 x 90 x 48mm (approx.)

Weight 351gms Including Battery

Jaw Opening 30mm

Accessories One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Instruction Manual & Carrying Case






18 SMART



DTT 266



3150+

400A AC		1000A AC		1000A AC	
Auto Ranging, 3½ Digit, 2000 Counts, Data Hold for Resistance & Continuity		Manual Ranging, 3½ Digit, 2000 Counts, Data Hold		Manual Ranging, 3½ Digit, 2000 Counts, Data Hold, APO	
Ranges		Ranges		Ranges	
AC Current	2A, 20A, 200A, 400A (Auto Ranging)	AC Current	200A, 1000A	AC Current	200A, 1000A
Accuracy	±(2.5%rdg+10dgt) on 2A & 20A ±(2.0%rdg+5dgt) on 200A & 400A (Measures above 700mA AC)	Accuracy	±(2.5% + 13dgt) on 200A ±(2.5% + 8dgt) upto 800A Above 800A the reading are only for reference	Accuracy	±(3%rdg+4dgt) on 200A ±(2%rdg+4dgt) on 1000A
AC Response	40 - 200Hz	Overload	1200A AC max. for 1 min.	Overload	1000A AC max. for 1 min.
Overload	400A AC max. for 1 min.	AC Response	50 ~ 60Hz	AC Response	40 ~ 500Hz
DC Voltage	2V, 20V, 200V, 600V (Auto)	DC Voltage	1000V	DC Voltage	200V, 1000V
Accuracy	±(0.5%rdg+2dgt) on all ranges except ±(1.0%rdg+5dgt) on 600V (Measures above 1V DC)	Accuracy	±(1%rdg+5dgt) 750V	Accuracy	±(0.8%rdg+4dgt) on 200V ±(1%rdg+4dgt) on 1000V
AC Voltage	2V, 20V, 200V, 600V (Auto)	AC Voltage	750V	AC Voltage	200V, 1000V
Accuracy	±(1.2%rdg+3dgt) on all ranges except ±(1.2%rdg+8dgt) on 600V (Measures above 1V AC)	Accuracy	±(1.2%rdg+5dgt) 45 ~ 450Hz	Accuracy	±(1.0%rdg+8dgt) on 200V ±(1.5%rdg+8dgt) on 1000V
AC Response	40 - 400Hz	Resistance	200Ω, 20KΩ	AC Response	40 ~ 500Hz
Resistance	200Ω, 2kΩ, 20KΩ 200kΩ, 2MΩ, 20MΩ (Auto)	Accuracy	±(1.0%rdg+10dgt) on 200Ω ±(1.0%rdg+4dgt) on 20KΩ	Resistance	200kΩ, 20MΩ
Accuracy	±(1.5%rdg+3dgt)	Over Volt Protection	250V DC / 220V AC RMS	Accuracy	±(1.2%rdg+4dgt) on 200KΩ ±(2.5%rdg+4dgt) on 20MΩ
Measuring Category	CAT III 600V	Audible Cont.	30Ω ± 20Ω (approx.)	Over Volt Protection	250V DC or AC RMS
Audible Continuity	30Ω Approx	Over Volt Protection	250V DC / 220V AC RMS	Audible Cont.	40Ω (approx.)
Power	Two 1.5V 'AAA' Battery	Insulation Test	20MΩ, 2000MΩ (With Optional Unit)	Over Volt Protection	250V DC or AC RMS
Low Battery	"  " is indicated	Accuracy	±(2% of rdg + 2 dgt) on 20MΩ ±(4% of rdg + 2 dgt) upto 500MΩ ± (5% of rdg + 2 dgt) above 500MΩ	Diode Test	1.0 ± 0.6mA (approx.)
Battery Life	200 Hours Typical	Power	9V Battery	Over Volt Protection	250V DC or AC RMS
Dimension	175 x 65 x 28 mm (approx.)	Low Battery	"  " is indicated	Power	Two 1.5V 'AAA' Battery
Weight	130gms Including Battery (approx.)	Battery Life	200 Hours Typical	Low Battery	"  " is indicated
Jaw Opening	Cable Dia. 25mm (max.)	Dimension	230 x 68 x 37mm (approx.)	Battery Life	200 Hours Typical
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (Installed)	Weight	240gms Including Battery (approx.)	Dimension	247 x 90 x 40 mm (approx.)
		Jaw Opening	Cable Dia. 53mm (max.)	Weight	380gms Including Battery (approx.)
		Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, 9V Battery (installed) x 1, 500V Insulation Tester Unit x 1 (optional)	Jaw Opening	Cable Dia. 43mm (max.) Bus Bar 16mm x 65mm
				Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, 1.5V Battery (installed)


3690 AUTO

3690P+ AUTO


1) Above 80.0V DC & AC



2) NCV

Orange Backlight for High Voltage Alert
600A DC / AC

Auto / Manual, 3½ Digit, 4000 Counts, Frequency, Data Hold, Audible Continuity, Diode Test, Δ Zero Button (for DCA)

Ranges

DC Current	400A, 600A
Accuracy	±(1.5%rdg + 5dgt) for 400A ±(2%rdg + 5dgt) for 600A
Overload	600A DC max. for 1 min.
AC Current	400A, 600A
Accuracy	±(1.75%rdg + 5dgt)
AC Response	(50-60Hz)
Overload	600A AC max. for 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 600V
Accuracy	±(0.5%rdg + 8dgt) (400mV to 400V) ±(0.7%rdg + 2dgt) for 600V
AC Voltage	4V, 40V, 400V, 600V
Accuracy	±(1.2%rdg + 4dgt) ±(4%rdg + 5dgt) for 600V
AC Response	(50-60Hz)
Resistance	400Ω ~ 40MΩ
Accuracy	±(0.75%rdg + 8dgt) 400Ω to 400kΩ ±(1%rdg + 6dgt) 4MΩ ±(2%rdg + 4dgt) 40MΩ
Overload	600V DC / AC RMS
Over Range	"OL" or "-OL" is indicated
Frequency	100Hz, 1KHz, 10KHz, 100KHz, 500KHz
Accuracy	±(0.3%rdg + 2dgt)
Duty Cycle	1% to 90 %
Power	Two 1.5V 'AAA' Battery
Low Battery	" " is Indicated
Battery Life	150 hours (typical)
Dimension	220 x 85 x 46 mm (approx.)
Weight	280gms Including Battery (approx.)
Jaw Opening	Cable Dia. 30mm max.
Accessories	One Pair of Test Leads, Battery (installed), Instr. Manual & Carrying Case

600A DC / AC TRMS

Auto Ranging, 3½ Digit, 6000 Counts, Capacitance, Data Hold, Back Light (White & Orange), Torch Light, Hz / Duty, NCV (Buzzer & EF Strength), APO

DC Current	60A / 600A
Accuracy	±(2.5%rdg + 10dgt)
Overload	600A DC max. for 1 min.
AC Current	60A / 600A
Accuracy	±(2.5%rdg + 10dgt)
AC Response	40Hz ~ 400Hz
Overload	600A AC max. for 1 min.
DC Voltage	6V, 60V, 600V (Auto)
Accuracy	±(0.8%rdg + 3dgt)
AC Voltage	6V, 60V, 600V (Auto)
Accuracy	±(1.0%rdg + 8dgt)
AC Response	40Hz ~ 400Hz
Resistance	600Ω, 6kΩ, 60kΩ, 600kΩ, 6MΩ, 60MΩ (Auto)
Accuracy	±(1.5%rdg + 5dgt)
Capacitance	6nF, 60nF, 600nF, 6μF, 60μF, 600μF, 6mF, 60mF (Auto)
Accuracy	±(5%rdg + 8dgt)
Note	: 6nF for Reference only
Frequency	9.999Hz ~ 9.999MHz (Auto)
Accuracy	±(1.0%rdg + 3dgt)
Duty Cycle	0.1% - 99.9%
Accuracy	±(1.0%rdg + 3dgt)
Safety	CAT III 600V
Standard	
Audible	50Ω (approx.)
Continuity	
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Low Battery	" " is indicated
Battery Life	200 Hours Typical
Dimension	203 x 71 x 33 mm (approx.)
Weight	193gms Including Battery (approx.)
Jaw Opening	Cable Dia. 35mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

Accessories

K Type Bead Probe (upto 260°C)
Model : TPK-B

K Type Stick Probe (upto 500°C)
Model : TP-02

Pair of Test Leads suitable for DMM/DTT
Model : TL-DMM/DTT

Pair of Test Leads suitable for Insulation Tester
Model : TL-IT




36-AUTO BL



99+

600A DC /AC TRMS

Auto Ranging, 3% Digit, 6000 Counts, Temperature, Capacitance, Data Hold, Back Light, Torch Light, Hz / Duty, NCV (LED, Buzzer & EF Strength), APO

Ranges

DC Current 60A/ 600A

Accuracy $\pm(3\%rdg+3dgt)$

Overload 600A DC max. for 1 min.

AC Current 60A / 600A

Accuracy $\pm(2.5\%rdg+8dgt)$ on 60A

$\pm(2.5\%rdg+5dgt)$ on 600A

AC Response 40Hz ~ 1KHz

Overload 600A AC max. for 1 min.

DC Voltage 600mV, 6V, 60V, 600V (Auto)

Accuracy $\pm(0.8\%rdg+3dgt)$

AC Voltage 6V, 60V, 600V (Auto)

Accuracy $\pm(1.2\%rdg+3dgt)$

AC Response 40Hz ~ 1KHz

Resistance 600Ω, 6kΩ, 60kΩ, 600kΩ,

6MΩ, 60MΩ (Auto)

Accuracy $\pm(1\%rdg+3dgt)$

Capacitance 60nF, 600nF, 6μF, 60μF,

600μF, 6mF, 60mF (Auto)

Accuracy $\pm(4\%rdg+3dgt)$

Frequency 60Hz, 600Hz, 6KHz, 60KHz,

600KHz, 1MHz (Auto)

Accuracy $\pm(0.5\%rdg+2dgt)$

Duty Cycle 0.1% - 99.9%

Accuracy $\pm(0.5\%rdg+2dgt)$

Temperature -20°C to 750°C /

-4°F to 1382°F

Accuracy $\pm(3\%rdg+5dgt)$

Safety Standard CAT II 600V

Audible 30Ω (approx.)

Continuity

Diode Test 1.0 \pm 0.6mA (approx.)

Power Two 1.5V 'AAA' Battery

Battery Life 200 Hours Typical

Low Battery "⚡" is indicated

Dimension 185 x 65 x 28 mm (approx.)

Weight 170gms Including Battery (approx.)

Jaw Opening Cable Dia. 25mm (max.)

Accessories One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C)

600A DC /AC TRMS

Auto Ranging, 3% Digit, 6000 Counts, Temperature, Capacitance, Data Hold, Back Light, Torch Light, Hz / Duty, NCV (LED, Buzzer & EF Strength), LoZ (DCV/ACV), VFC, APO

Ranges

DC Current 60A/ 600A

Accuracy $\pm(3\%rdg+3dgt)$

Overload 600A DC max. for 1 min.

AC Current 60A / 600A

Accuracy $\pm(2.5\%rdg+3dgt)$

AC Response 40Hz ~ 1KHz

Overload 600A AC max. for 1 min.

DC Voltage 600mV, 6V, 60V, 600V

(Auto)

Accuracy $\pm(0.5\%rdg+5dgt)$ on all

ranges except

$\pm(0.8\%rdg+5dgt)$ on 600V

6V, 60V, 600V (Auto)

Accuracy $\pm(1.0\%rdg+4dgt)$ on 6V, 60V

$\pm(1.2\%rdg+10dgt)$ on 600V

AC Response 40Hz ~ 1KHz

Resistance 600Ω, 6kΩ, 60kΩ, 600kΩ,

6MΩ, 60MΩ (Auto)

Accuracy $\pm(0.8\%rdg+5dgt)$ on all

ranges except

$\pm(1.2\%rdg+5dgt)$ on 60MΩ

6nF, 60nF, 600nF, 6μF,

60μF, 600μF, 6mF, 60mF,

100mF (Auto)

Accuracy $\pm(4\%rdg+5dgt)$

on all ranges except

$\pm(5\%rdg+5dgt)$ on 100mF

Note : 6nF for Reference

only

Frequency 60Hz, 600Hz, 6KHz, 60KHz,

100KHz (Auto)

Accuracy $\pm(1.5\%rdg+5dgt)$

Duty Cycle 0.1% - 99.9%

Accuracy Reference only

-20°C to 1000°C /

-4°F to 1832°F

Accuracy $\pm(1.0\%rdg+3dgt)$

Safety Standard CAT II 600V

Audible 50Ω (approx.)

Continuity

Diode Test

Power

Low Battery

Battery Life

Dimension

Weight

Jaw Opening

Accessories

1.0 \pm 0.6mA (approx.)

Two 1.5V 'AAA' Battery

"⚡" is indicated

200 Hours Typical

190 x 71 x 30 mm (approx.)

180gms Including Battery

(approx.)

Cable Dia. 30mm (max.)

One Pair of Test Leads,

Instruction Manual,

Carrying Case,

Battery (installed),

K Type Thermocouple

(upto 260°C)

Accessories

K Type Bead Probe (upto 260°C)

Model : TPK-B



K Type Stick Probe (upto 500°C)

Model : TP-02



Pair of Test Leads suitable for DMM/DTT

Model :

TL-DMM/DTT



Pair of Test Leads suitable for Insulation Tester

Model : TL-IT





3600BL+



1080-TRMS

1200A DC / 1000A AC TRMS 3% Digit, 4200 Counts LCD with Backlight, Auto Ranging, Frequency, Duty Cycle, MAX / MIN, Δ REL, DATA HOLD, APO Ranges DC Current 400A, 1200A Accuracy ±(3.0%rdg+8dgts) Overload 1200A DC/AC RMS max. 1 min. AC Current ^{TRMS} 400A, 1000A Accuracy ±(3.0%rdg + 8dgt) 50~60Hz ±(3.5%rdg + 8dgt) 40Hz~1KHz Overload 1200A DC/AC RMS max. 1 min. DC Voltage 400mV, 4V, 40V, 400V, 1000V [Auto] Accuracy ±(0.8%rdg + 5dgts) AC Voltages ^{TRMS} 4V, 40V, 400V, 750V [Auto] Accuracy ±(1.5%rdg + 5dgt) 50~60Hz ±(2.0%rdg + 8dgt) 40Hz~1KHz Resistance 400Ω, 4kΩ, 40kΩ, 400kΩ, 4MΩ, 40MΩ [Auto] Accuracy ±(1.5%rdg + 5dgt) on 400V ±(1.5%rdg + 3dgt) on 4kΩ~400kΩ ±(2.0%rdg + 5dgt) on 4MΩ, 40MΩ Capacitance 4nF, 40nF, 400nF, 4μF, 40μF [Auto] Accuracy ±(3%rdg + 10dgt) on all ranges except ±(4%rdg + 40dgt) on 4nF ±(4%rdg + 10dgt) on 40nF Note : on 4nF (Use Δ REL) Frequency 9.999, 99.99, 999.9Hz, 9.999, 99.99, 999.9KHz, 9.999MHz [Auto] Accuracy ±(0.5%rdg + 4dgts) Duty Cycle Accuracy ±(0.5%rdg + 4dgts) Temperature -20°C ~ 750°C / -4°F ~ 1400°F Accuracy ±(1.0%rdg + 5dgts) on -20°C ~ 400°C / -4°F ~ 650°F ±(1.5%rdg + 5dgts) on 401°C ~ 750°C / 651°F ~ 1400°F		1200A DC/AC TRMS Auto / Manual, 3% Digit, 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Temperature Ranges DC Current 600 / 6000μA / 60 / 600 / 1200A Accuracy ± (1.2% rdg + 10dgt) on 600 / 6000μA ± (2.0% rdg + 30dgt) on 60 / 600 / 1200A Overload 1200A DC Max. for 1min. for A AC Current ^{TRMS} 600 / 6000μA / 60 / 600 / 1200A Accuracy ± (2.0% rdg + 30dgt) AC Response 40 Hz~1000Hz Overload 1200A AC Max. for 1min. for A DC Voltage 600mV / 6 / 60 / 600 / 1000V Accuracy ± (0.5%rdg + 3dgt) AC Voltage ^{TRMS} 6 / 60 / 600 / 750V Accuracy ± (1.0% rdg + 5dgt) AC Response 40Hz~1000Hz Resistance 600Ω / 6 / 60 / 600kΩ / 6 / 60MΩ		Accuracy ± (0.8% rdg + 5dgt) on 600Ω ± (0.8% rdg + 3dgt) on 6 / 60 / 600kΩ / 6MΩ ± (1.0% rdg + 25dgt) on 60MΩ Capacitance 9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF Accuracy ± (3.5% rdg + 60dgt) on all ranges except ± (5.0% rdg + 10dgt) on 9.999mF Frequency Accuracy ± (0.01% rdg + 3dgt) Duty Cycle Accuracy ± (0.01% rdg + 3dgt) Temperature -20°C~1000°C / 0°F~1832°F Accuracy ± (1% rdg + 5dgt) on - 20°C~400°C ± (1.5% rdg + 15dgt) on 400°C~1000°C ± (0.75% rdg + 5 dgt) on 0°F~750°F ± (1.5% rdg + 15 dgt) on 750°F~1832°F 600.0μA / 6000μA HVAC Flame Sensors Accuracy ± (1% rdg + 20 dgt) Measuring Catagory Sp. Function Diode Test, Audible Continuity, Data Hold Power One 9V Battery Low Battery '⚡' is indicated Battery Life 200 hours typical Dimension 238 x 90 x 48mm (approx.) Weight 320gms Including Battery (approx.) Jaw Opening 30mm Accessories One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Instruction Manual & Carrying Case	
		Sp. Function Audible Continuity, Diode Test Protection 600VDC or AC RMS overload protection in Capacitance, Diode, Ohms, Hz, Duty Cycle, Continuity, Temperature Power Two 1.5V "AAA" Battery Low Battery '⚡' is indicated. Battery Life 150 hours (typical) Dimensions 250 x 100 x 46 mm (approx.) Weight 386gms Including Battery (approx.) Jaw Opening Cable Dia 55mm max. Accessories One Pair of Test Leads, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C) & Inst. Manual			




2003A+




4455

2000A DC / 2000A AC TRMS 3% Digit, 6000 Counts, 60 Segment Bargraph, Auto / Manual, Δ ZERO, Hz / Duty, RPM, MIN-MAX, Data Hold, Audible Continuity, APO		2000A DC / 2000A AC (TRMS) 3½ Digit, 1999 Counts, Auto & Manual Ranging, Inrush Current, Backlight, Torch light, DATA HOLD, APO		2000A DC / 2000A AC (TRMS) 3½ Digit, 1999 Counts, Auto & Manual Ranging, Inrush Current, Backlight, Torch light, DATA HOLD, APO	
Ranges		Ranges		Ranges	
DC Current	600A, 2000A	DC Current	20A, 200A, 2000A (Auto & Manual Ranging)	DC Current	20A, 200A, 2000A (Auto & Manual Ranging)
Accuracy	±(2.5%rdg + 5dgt)	Accuracy	±(1.90%rdg+10dgt)	Accuracy	±(0.50%rdg + 5dgt) on all ranges except ±(2.00% rdg + 5dgt) on 2000V
Overload	2000A DC max. for 1 min.	Overload	2000 A DC/AC RMS max. for 1 min.	AC Voltages	2V, 20V, 200V, 2000V (Auto & Manual Ranging)
AC Current	600A, 2000A	AC Current	20A, 200A, 2000A (Auto & Manual Ranging)	Accuracy	±(0.80% rdg + 10 dgt) 2V ±(0.80% rdg + 5 dgt) 20V, 200V ±(2.0% rdg + 5 dgt) 2000V
Accuracy	±(3.5%rdg + 5dgt)	Accuracy	±(1.90%rdg + 10dgt)	AC Response	Frequency : 10Hz ~ 1KHz (200V : 10Hz to 400Hz), Display : TRUE RMS (Sinusoidal waveform RMS Calibration)
Overload	2000A AC max. for 1 min.	AC Response	AC Conversion Type : TRUE RMS responding, Calibrated readings consistent with sinusoidal waveform RMS. Frequency Range : 50 ~ 60Hz	Resistance	200Ω, 2kΩ, 20kΩ, 200kΩ, 2MΩ, 20MΩ (Auto & Manual Ranging)
DC Voltage	600mV, 6V, 60V, 600V (Auto & Manual)	Overload	2000A DC/AC RMS max. for 1 min.	Accuracy	±(1.00%rdg + 5dgt) on 200Ω ±(0.80%rdg + 5dgt) on 2kΩ~2MΩ ±(1.50%rdg + 5dgt) on 20MΩ
Accuracy	±(0.5%rdg + 5dgt)	DC Voltage	2V, 20V, 200V, 2000V (Auto & Manual Ranging)	Capacitance	20nF, 200nF, 2μF, 20μF, 200μF, 2000μF (Auto Ranging)
Overload	600V DC / AC RMS			Accuracy	±(3%rdg + 10dgt) on all ranges except ±(5%rdg + 10dgt) on 2000μF
AC Voltage	6V, 60V, 600V (Auto & Manual)			Special Function	Audible Continuity, Diode Test function
Accuracy	±(1%rdg + 6dgt) (50 ~ 60Hz) ±(2%rdg + 4dgt) (40 ~ 500Hz)	% Duty Cycle	1% to 90%	Protection	220VDC or AC RMS overload protection in Capacitance, Diode, Ohms, Continuity
Overload	600V DC / AC RMS	Accuracy	±(0.5%rdg + 5dgt)	Power	One 9V Battery
Resistance	600Ω, 6kΩ, 60kΩ, 600kΩ, 6MΩ, 60MΩ, (Auto & Manual)	RPM	9.999K RPM, 99.99K RPM (Auto)	Low Battery	" " is indicated.
Accuracy	±(0.3%rdg + 8dgt) 600Ω ±(0.3%rdg + 5dgt) 6~600kΩ ±(0.5%rdg + 5dgt) 6MΩ ±(2%rdg + 5dgt) 60MΩ	Accuracy	±0.5%rdg of fullscale	Battery Life	150 hours (typical)
Overload	600V DC/AC RMS	Sp. function	Audible Continuity, Diode Test	Dimensions	270 x 100 x 46 mm (approx.)
Capacitance	40nF, 400nF, 4μF, 40μF (Auto)	Over Range	"OL" or "-OL" is indicated	Weight	460gms Including Battery (approx.)
Accuracy	±(3%rdg + 40dgt) on 40nF (Use Δ ZERO) ±(3%rdg + 10dgt) on 400nF to 4μF ±(6%rdg + 10dgt) on 40μF	Power	One 9V Battery	Jaw Opening	Cable Dia 55mm max.
Overload	600V DC / AC rms.	Low Battery	" " is Indicated	Accessories	One Pair of Test Leads, Carrying Case, Battery (installed) & Inst. Manual
Frequency	9.999Hz ~ 999.9KHz (Auto)	Battery Life	150 hours (typical)		
Accuracy	±(0.1 %rdg + 2dgt) (for non distorted waveforms only)	Dimensions	250 x 100 x 46 mm (approx.)		
		Weight	410 gms Including Battery (approx.)		
		Jaw Opening	Cable Dia 55mm max.		
		Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Carrying Case		

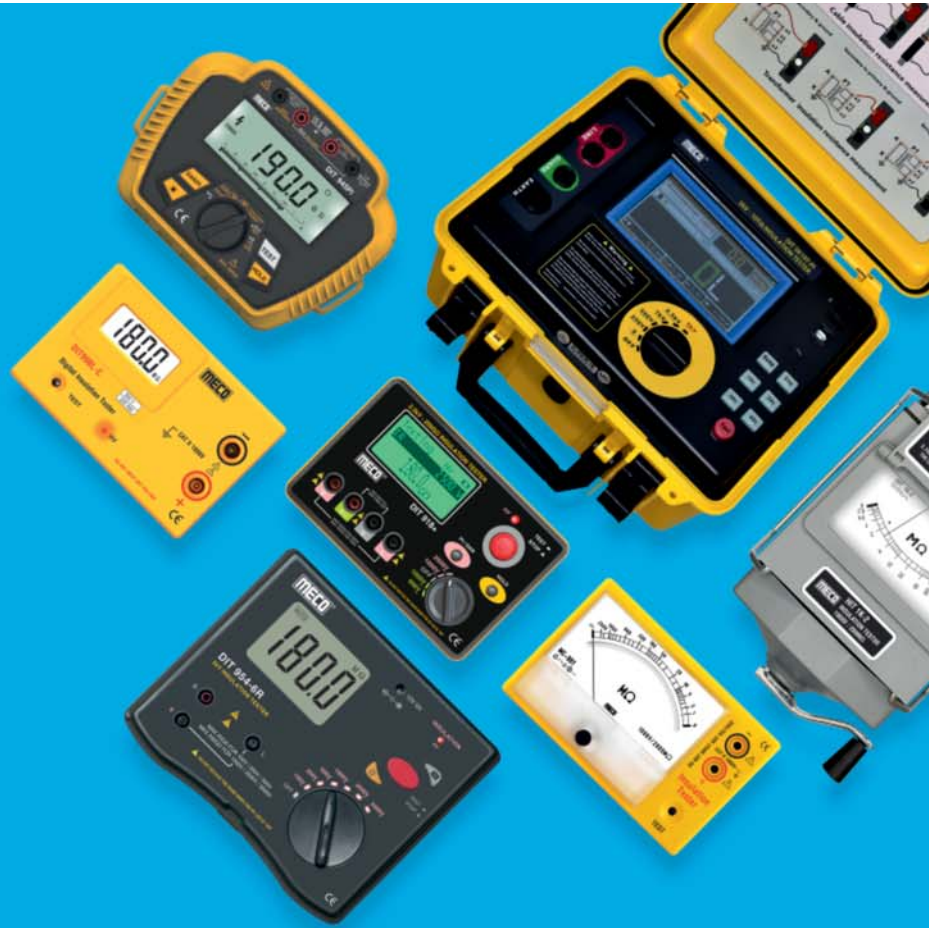

Insulation Testers

- ✓ Analog Insulation Testers (Hand Cranking Type)
- ✓ Analog Insulation Testers (Electronic Type)
- ✓ Digital Insulation Testers



+60 YEARS
ONE MISSION




Reliable



Long-Lasting



Affordable

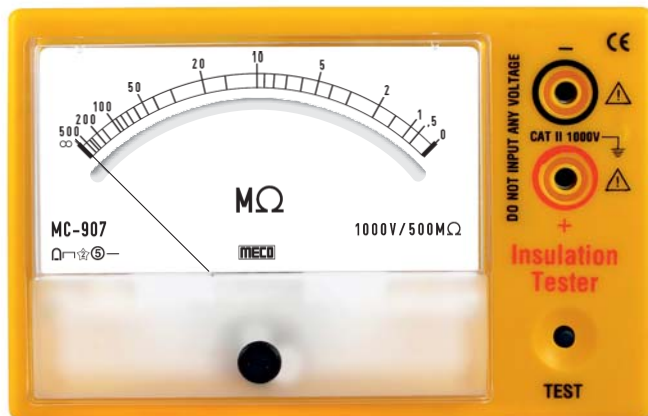

MC-900 Series / MC-900BA Series



Carrying Case



Test Leads



Batteries



Adaptor
(MC-900BA Series)
(Optional)

Features

- Single Person Push Button Operation
- High Accuracy $\pm 5\%$ of Indicated Value in Effective Range
- Scale Length : 80mm (approx.)
- Terminal Voltage : The terminal voltage shall be with in $\pm 25\%$ of rated voltage corresponding to the rated resistance & not less than 75% of rated voltage for the central scale mark
- ABS Yellow Case with Polycarbonate Transparent Meter Front Cover
- Meets Requirement of IEC 61010, Installation Category II, 1000V Phase Earth
- Designed to Generally Confirm to IS 10656-1983
- 7 Models with various Voltage & MΩm Ranges
- Battery Adaptor (Optional) for MC-900BA Series


Applications

- Ideal for Insulation Resistance Measurement of Electrical Equipment (Motors, Transformers, Machines, etc.)
- Cables for Communication Networks
- Industrial, Commercial & Residential Installations
- Electrical Cables for Distribution Networks
- House Hold Appliances (Washing Machines, Mixer, Toaster, etc.)

Model	Range	Test Voltage DC
MC-901 / MC-901BA	0 - 20 M Ohms	100 V
MC-903 / MC-903BA	0 - 100 M Ohms	500 V
MC-904 / MC-904BA	0 - 500 M Ohms	500 V
MC-941 / MC-941BA	0 - 1000 M Ohms	500 V
MC-906 / MC-906BA	0 - 200 M Ohms	1000 V
MC-907 / MC-907BA	0 - 500 M Ohms	1000 V
MC-981 / MC-981BA	0 - 2000 M Ohms	1000 V

Specifications

Accuracy	$\pm 5\%$ of Indicated Value at $27^{\circ}\text{C} \pm 5^{\circ}\text{C}$
Operating Temperature	0° to 50°C
Storage Temperature	-10°C to 60°C
Relative Humidity	80% Maximum
Low Battery	When Battery Voltage Drops below Operating Voltage, Pointer cannot reach zero after shorting the Output Terminals.
Dielectric Strength	3.5 KV @ 50Hz for 1 min. between Input Terminals & Case
Insulation Resistance	More than 50M Ohm at 500V between Circuit & Case
Power	9V (6 x 1.5V AA) Battery
Dimensions	145 (L) x 95 (H) x 73 (W) mm (approx.)
Weight	Less than 440 gms Including Battery (approx.)
Accessories	Test and Calibration Certificate, Pair of Crocodile / Alligator Test Leads (Red & Black) x 1, Carrying Case x 1, 1.5V AA Batteries x 6 (Fitted - In), Battery Adaptor (Optional) for MC-900BA Series [AC/DC Adaptor Input 100 - 240V, 50 / 60Hz, 0.3A, Output : 9V \approx 500mA]
Ordering Information	Model, Battery Adaptor (optional)

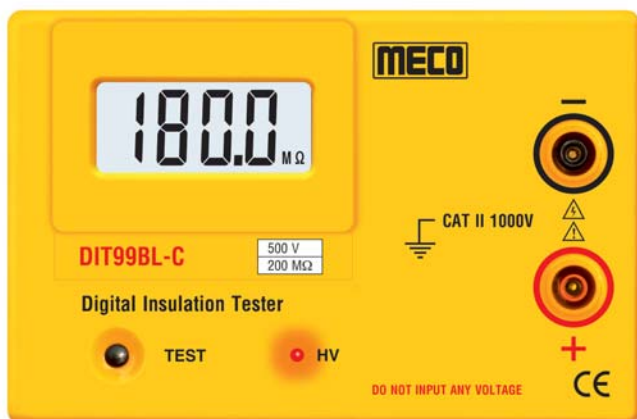

DIT99BL Series / DIT99BL-BA Series



Carrying Case



Test Leads



Batteries



**Adaptor
(DIT99BL-BA Series)
(Optional)**

Features

- 3½ Digit 15mm Digit Height LCD Display with Backlight
- High Voltage LED Indication
- High Accuracy $\pm \{3\% \text{ rdg} + 2 \text{ dgt}\}$
- 5 Models with various Voltage & MOhm Ranges
- Single Person Push Button Operation
- Designed to Generally Conform to IS 10656 -1983
- Meets Requirement of IEC 61010, Installation Category II, 1000V Phase - Earth
- Terminal Voltage : The terminal voltage shall be within $\pm 25\%$ of rated voltage corresponding to the rated resistance & not less than 75% of rated voltage for the central scale mark
- Carrying Case
- Battery Adaptor (Optional) for DIT99BL-BA Series

Applications

- Ideal for Insulation Resistance Measurement of Electrical Equipment (Motors, Transformers, Machines, etc.)
- Electrical Cables for Distribution Networks
- Cables for Communication Networks
- House Hold Appliances (Washing Machines, Mixer, Toaster, etc.)
- Industrial, Commercial & Residential Installations

Model	Range	Test Voltage DC	Resolution
DIT99BL-A / DIT99BL-A (BA)	0 - 20 M Ohms	100 V	0.01 M Ohms
DIT99BL-B / DIT99BL-B (BA)	0 - 200 M Ohms	250 V	0.1 M Ohms
DIT99BL-C / DIT99BL-C (BA)	0 - 200 M Ohms	500 V	0.1 M Ohms
DIT99BL-D / DIT99BL-D (BA)	0 - 200 M Ohms	1000 V	0.1 M Ohms
DIT99BL-E / DIT99BL-E (BA)	0 - 2000 M Ohms	1000 V	1 M Ohms

Specifications

Display	3½ Digit LCD Display with Backlight, 15mm Digit Height, 1999 Count (Max.)
H.V. Warning	Red LED Indicator for High Voltage Warning
Accuracy	$\pm \{3\% \text{ rdg} + 2 \text{ dgt}\}$ at $27^\circ\text{C} \pm 5^\circ\text{C}$
Conversion Rate	2.5 sec
Over-Range Indication	"1" is Displayed
Operating Temperature	0° to 50°C
Storage Temperature	-20°C to 60°C
Relative Humidity	80% Maximum
Low Battery	' ⎓ ' is Displayed when Battery Voltage drops below Operating Voltage
Dielectric Strength	3.5 KV @ 50Hz for 1 min. between Input Terminals & Case
Insulation Resistance	More than 50MOhm at 500V between Circuit & Case
Power	1.5V 'AA' x 6 Batteries
Dimensions	145 (L) x 93 (H) x 58 (W) mm (approx.)
Weight	370gms Including Battery (approx.)
Accessories	Test and Calibration Certificate, Pair of Crocodile / Alligator Test Leads (Red & Black) x 1, Carrying Case x 1, 1.5V AA Batteries (Fitted - In) x 6, Instruction Manual x 1, Battery Adaptor (Optional) for DIT99BL-BA Series [AC/DC Adaptor Input : 100 - 240V, 50 / 60Hz, 0.3A, Output : 9V \approx 500mA]
Ordering Information	Model, Battery Adaptor (optional)



Test Leads



Carrying Case



HIT Series

Features

- Single Person Hand Driven
- High Accuracy $\pm 1\%$ FS
- Scale Length : 65mm (approx.)
- Steady and Accurate Readings
- Steady Output Voltage
- "Guard" Terminal to Prevent Errors Due to Surface Leakage
- Measurement from 10% to 100% of the Insulation Resistance Range
- Rugged Plastic / Metal Case to Prevent the Ingress of Moisture
- 6 Models with Various Voltage & MOhm Ranges

Applications

- Ideal for Insulation Resistance Measurement of
 - Electrical / Electronic Equipment (Motors, Transformers, Generators, Panels, Machines etc.)
 - Cables for Communication / Telecom Networks
 - Industrial, Commercial & Residential Installations
 - Electrical Cables for Distribution Networks
 - House Hold Appliances (Washing Machines, Mixer, Toaster etc.)

Model	Range	Test Voltage
HIT 5 - 1	0 ~ 100M Ω	500V
HIT 5 - 2	0 ~ 200M Ω	500V
HIT 1K - 2	0 ~ 200M Ω	1000V
HIT 1K - 5	0 ~ 500M Ω	1000V
HIT 2K5 - 50	0 ~ 5000M Ω	2500V
HIT 5K - 50	0 ~ 5000M Ω	5000V

Specifications

Accuracy	$\pm 1\%$ FS
Operating Temperature	0° to 50°C
Storage Temperature	-10°C to 60°C
Relative Humidity	80% Maximum
Insulation Resistance	More than 20M Ohm at 500V Between Circuit & Case
Cranking Speed	120rpm (approx.)
Inclination Variation	$\pm 1\%$ FS at 10°C Inclination
Temperature Variation	$\pm 0.8\%$ FS for every $\pm 10^\circ\text{C}$ Change of Ambient Temperature
External Magnetic	$\pm 2.5\%$ FS to Magnetic
Field Influence	Field Defect of 5 A/M (Ampere Per Meter)
Dimensions & Weight	225 x 130 x 140 mm (approx.), 550gms (approx.) HIT 2K5-50 & HIT 5K-50
	210 x 120 x 150 mm (approx.), 950gms (approx.) for other models
Accessories	Test and Calibration Certificate, Pair of Crocodile / Alligator Test Leads (Red & Black) x 1, Carrying Case x 1, Instruction Manual



Product Kit



DIT 936PI



Introduction

MECO DIT 936PI is a 1KV Digital Insulation Tester with 4 Digit (2000 Counts) Large Screen LCD Display. It measures Insulation Resistance upto 20GΩ, Low Resistance upto 60Ω and AC Voltage upto 600VAC. It has Special functions to Measure P.I. (Polarization Index) and D.A.R. (Dielectric Absorption Ratio). It is ideally suited for testing of Insulation Resistance and Voltage of Transformers, Switches, High Voltage Systems, Generator, Cables, Appliances, Motors, Power Capacitors etc.

Features

- 4 Digit (2000 Counts) Large LCD Display with Backlight
- High Accuracy for Insulation Resistance, AC Voltage & Low Resistance Measurement
- Range Selection & Single Person Push Button Operation
- P.I. & D.A.R. Functions
- Measurement of Voltage upto 600V AC
- Low Resistance upto 60Ω
- Auto Range (Insulation Test)
- APO & Data Hold Functions
- ⚡ Sign for HV (High Voltage)
- Battery / 12V DC Operated
- As per Safety Standard IEC/EN 61010-1
- Category CAT II 1000V, CAT III 600V
- Over Range Alarm
- Shock, Dust & Moisture Resistant Casing
- Heavy Duty Rubber Holster

Electrical Specifications

Accuracy : ±(% reading + digits) at 23°C±5°C; RH≤75%

Specification	Test Voltage	Range	Resolution	Test Current	Accuracy
Insulation Test	100V (±10%)	0~20MΩ	0.01MΩ	2mA (Maximum)	±(3% + 5)
		20~200MΩ	0.1MΩ		
	250V (±10%)	0~20MΩ	0.01MΩ		
		20~200MΩ	0.1MΩ		
	500V (±10%)	0~20MΩ	0.01MΩ		±(5% + 5)
		20~200MΩ	0.1MΩ		
	1000V (±10%)	0.2G~2GΩ	0.001GΩ		
		0~20MΩ	0.01MΩ		
		20~200MΩ	0.1MΩ		±(10% + 5)
		0.2G~2GΩ	0.001GΩ		
		2G~20GΩ	0.01GΩ		
AC Voltage [40 ~ 60Hz]	-	600V	1V	-	±(1.5% + 5)
Resistance	-	60Ω	0.01Ω	-	±(1.2% + 5)

General Specifications

Display	4 Digit (2000 Counts) Large Screen LCD Display	Dimensions	179 x 133 x 70mm (approx.)
High Voltage Indication	✓	Weight	650gms including batteries (approx.)
Data Hold	✓	Standard Accessories	Test and Calibration Certificate, Insulation Resistance Measurement Test Leads x 1 Set, Pair of Alligator Clips, 1.5V AA Batteries x 8 pcs, Connector Cable for 12V DC x 1pc, Carrying Bag x 1 pc, Instruction Manual x 1 pc
Low Battery Indication	✓		
D.A.R. Function	✓		
P.I. Function	✓		
Operating Temperature	0°C to 40°C (RH ≤ 80%)		
Storage Temperature	-10°C to 50°C (RH ≤ 85%)		
Power	12V (Eight 1.5V "AA" Battery)		



Product Kit



DIT 945PI



Introduction

MECO DIT 945PI is a 2.5KV Digital Insulation Tester with 4 Digit (2000 Counts) Large Screen LCD Display. It measures Insulation Resistance upto 200GΩ, Low Resistance upto 60Ω and AC Voltage upto 600VAC. It has Special functions to Measure P.I. (Polarization Index) and D.A.R. (Dielectric Absorption Ratio). It is ideally suited for testing of Insulation Resistance and Voltage of Transformers, Switches, High Voltage Systems, Generator, Cables, Appliances, Motors, Power Capacitors etc.

Features

- 4 Digit (2000 Counts) Large LCD Display with Backlight
- High Accuracy for Insulation Resistance, AC Voltage & Low Resistance Measurement
- Range Selection & Single Person Push Button Operation
- P.I. & D.A.R. Functions
- Measurement of Voltage upto 600V AC
- Low Resistance upto 60Ω
- Auto Range (Insulation Test)
- APO & Data Hold Functions
- ⚡ Sign for HV (High Voltage)
- Battery / 12V DC Operated
- As per Safety Standard IEC/EN 61010-1
- Category CAT II 1000V, CAT III 600V
- Over Range Alarm
- Shock, Dust & Moisture Resistant Casing
- Heavy Duty Rubber Holster

Electrical Specifications

Accuracy : $\pm(\% \text{ reading} + \text{digits})$ at $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$; $\text{RH} \leq 75\%$

Specification	Test Voltage	Range	Resolution	Test Current	Accuracy
Insulation Test	250V ($\pm 10\%$)	0~20MΩ	0.01MΩ	2mA (Maximum)	$\pm(3\% + 5)$
		20~200MΩ	0.1MΩ		
	500V ($\pm 10\%$)	0~20MΩ	0.01MΩ		
		20~200MΩ	0.1MΩ		
		0.2G~2GΩ	0.001GΩ		
	1000V ($\pm 10\%$)	0~20MΩ	0.01MΩ		$\pm(5\% + 5)$
		20~200MΩ	0.1MΩ		$\pm(10\% + 5)$
		0.2G~2GΩ	0.001GΩ		$\pm(3\% + 5)$
	2500V ($\pm 10\%$)	0~20MΩ	0.01MΩ		$\pm(5\% + 5)$
		20~200MΩ	0.1MΩ		$\pm(10\% + 5)$
		0.2G~2GΩ	0.001GΩ		
		2G~20GΩ	0.01GΩ		
AC Voltage [40 ~ 60Hz]	-	600V	1V	-	$\pm(1.5\% + 5)$
Resistance	-	60Ω	0.01Ω	-	$\pm(1.2\% + 5)$

General Specifications

Display	4 Digit (2000 Counts) Large Screen LCD Display	Dimensions	179 x 133 x 70mm (approx.)
High Voltage Indication	✓	Weight	676gms including batteries (approx.)
Data Hold	✓	Standard Accessories	Test and Calibration Certificate, Insulation Resistance Measurement Test Leads x 1 Set, Pair of Alligator Clips, 1.5V AA Batteries x 8 pcs, Connector Cable for 12V DC x 1pc, Carrying Bag x 1 pc, Instruction Manual x 1 pc
Low Battery Indication	✓		
D.A.R. Function	✓		
P.I. Function	✓		
Operating Temperature	0°C to 40°C (RH \leq 80%)		
Storage Temperature	-10°C to 50°C (RH \leq 85%)		
Power	12V (Eight 1.5V "AA" Battery)		



Product Kit



Insulation Resistance
Measurement Test Leads



DIT 918+



Batteries



Carrying Bag

Introduction

MECO DIT 918+ is a 2.5KV Digital Insulation Tester with Large LCD Display. It measures Insulation Resistance upto 200GΩ AC Voltage upto 600V and DC Voltage up to 1000V. It has Special functions to Measure P.I. (Polarization Index) and D.A.R. (Dielectric Absorption Ratio). It is ideally suited for testing of Insulation Resistance and Voltage of Transformers, Switches, High Voltage Systems, Cables, Appliances, Motors etc.

Features

- Large LCD Display (128 x 64 Dot-Matrix)
- High Accuracy for Insulation Measurement and for AC/DC Voltage Measurement
- Suitable for P.I. & D.A.R. Measurement
- Range Selection & Single Person Push Button Operation
- Data Holding Function
- Measurement of Voltage upto 600VAC and 1000VDC
- Auto Range (Insulation Test)
- Red LED Indicator and Red Backlight for HV (High Voltage)
- Battery Operated
- As per IS10656-1983
- As per Safety Standard IEC/EN 61010-1 & 61010-31
- Over Voltage CAT II, 600V
- As per EMC Standard IEC 61326 Class B

Electrical Specifications

Accuracy : $\pm(\% \text{ reading} + \text{digits})$ at $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$; $\text{RH} \leq 75\%$

Specification	Test Voltage	Range	Resolution	Test Current	Accuracy
Insulation Resistance	1000V / 2500V DC	0.1MΩ to 200MΩ	0.01MΩ to 0.1GΩ	2mA (Maximum)	$\pm(3\% + 5)$
		200MΩ to 10GΩ			$\pm(5\% + 5)$
		10GΩ to 200GΩ			$\pm(10\% + 5)$
AC Voltage Measurement	-	0 ~ 600VAC (40 ~ 60Hz)	1V	-	$\pm(2\% + 5)$
DC Voltage Measurement	-	0 ~ 1000VDC		-	

General Specifications

Display	Large LCD Display (128 x 64 Dot-Matrix)
High Voltage LED Indication	✓
Terminal Voltage (E&L) Indication on LCD Display	✓
Data Hold	✓
Low Battery Indication	✓
Low Resistance Warning	✓
Operating Temperature	0°C to 40°C (RH \leq 80%)
Storage Temperature	- 10°C to 50°C (RH \leq 85%)
Power	9V [Six 1.5V "AA" Battery]
Dimensions	150 x 100 x 70mm (approx.)
Weight	680 gms including batteries (approx.)
Standard Accessories	Test and Calibration Certificate, Insulation Resistance Measurement Test Leads x 1 Set, 1.5V AA Batteries x 6 pcs, Carrying Bag x 1 pc, Instruction Manual x 1 pc



Product Kit



Batteries



Insulation Resistance
Measurement Test Leads



DIT 954-6R



Heavy Duty
Carrying Bag



AC Adaptor

Introduction

MECO DIT 954-6R is 5KV Digital Insulation Testers with 3½ Digit (1999 Counts) Large Display and Backlight. This Measures Insulation Resistance upto 200GΩ. It is ideally suited for testing of Insulation Resistance of Transformers, Switches, High Voltage Systems, Generator, Cables, Appliances, Motors, Power Capacitors etc.

Features

- 3½ Digit (1999 Counts) Large LCD Display
- Range Selection & Single Person Push Button Operation
- LCD with Green Backlight
- Data Holding Function
- Display with Annunciators
- Auto Range (Insulation Test)
- Red LED Indicator for HV (High Voltage)
- Inbuilt Protection Circuit to prevent the harm of reverse Voltages.
- Battery Operated with AC Adaptor
- As per IS10656-1983
- As per EMC Standard IEC 61326-1 Class B
- Over Voltage CAT III, 600V
- As per Safety Standard IEC/EN 61010-1 & 61010-31
- IP 44 Protection

Electrical Specifications

Accuracy : $\pm(\% \text{ reading} + \text{digits})$ at $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$; $\text{RH} \leq 75\%$

Specification	Test Voltage	Range	Resolution	Test Current	Accuracy
Insulation Resistance	100V / 250V / 500V DC	0.1MΩ to 200MΩ	0.01MΩ to 0.01GΩ	2mA (Maximum)	±(3% + 5)
		200MΩ to 10GΩ			±(5% + 5)
		10GΩ to 20GΩ			±(10% + 5)
	1000V / 2500V / 5000V DC	0.1MΩ to 200MΩ	0.01MΩ to 0.1GΩ		±(3% + 5)
		200MΩ to 10GΩ			±(5% + 5)
		10GΩ to 200GΩ			±(10% + 5)

General Specifications

Display	3½ Digit (1999 Counts) Large LCD Display with 29mm Digit Height
Over-Range Indication	'1' is displayed
Operating Temperature	0°C to 40°C (RH \leq 80%)
Storage Temperature	- 10°C to 50°C (RH \leq 75%)
Power	12V (Eight x 1.5V "AA" Battery) with AC Adaptor
Dimensions	190 x 155 x 75mm (approx.)
Weight	900 gms including batteries (approx.)
Standard Accessories	Test and Calibration Certificate, Insulation Resistance Measurement Test Leads for High Voltage x 1 Set, AC Adaptor x 1 pc, 1.5V "AA" Batteries x 8 pcs, Heavy Duty Carry Bag x 1 pc, Instruction Manual x 1 no.



Introduction

MECO DIT 954 is a 5KV Digital Insulation Testers with 3½ Digit (1999 Counts) Large Display and Backlight. This Measures Insulation Resistance upto 200GΩ, AC Voltage upto 600VAC and check Phase Sequence and Phase Status Indication. It is ideally suited for testing of Insulation Resistance and Voltage of Transformers, Switches, High Voltage Systems, Generator, Cables, Appliances, Motors, Power Capacitors etc.

Features

- 3½ Digit (1999 Counts) Large LCD Display
- Range Selection & Single Person Push Button Operation
- LCD with Green Backlight
- Data Holding Function
- Display with Annunciators
- Measurement of AC Voltage upto 600V
- Measurement of Phase Sequence Between (Phase - Phase Voltage) with LED Indicators & Beep Facility
- Auto Range (Insulation Test)
- Red LED Indicator for HV (High Voltage)
- Inbuilt Protection Circuit to prevent the harm of reverse Voltages.
- Battery Operated with AC Adaptor
- Suitable for Calculating PI & DAR (Manually)
- As per IS10656-1983
- As per EMC Standard IEC 61326-1 Class B
- Over Voltage CAT III, 600V
- As per Safety Standard IEC/EN 61010-1 & 61010-31
- IP 44 Protection

Electrical Specifications

Accuracy : ±(% reading + digits) at 23°C ±5°C; RH≤75%

Specification	Test voltage	Range	Resolution	Test Current	Accuracy
Insulation Resistance	1000V / 2500V / 5000V DC	0.1MΩ to 200MΩ	0.01MΩ to 0.1GΩ	2mA (Maximum)	±(3% + 5)
		200MΩ to 10GΩ			±(5% + 5)
		10GΩ to 200GΩ			±(10% + 5)
AC Voltage Measurement	-	0 ~ 600VAC (40 ~ 60Hz)	1V	-	±(2% + 5)
Phase Sequence Test	-	100V ~ 450V (Phase to Phase) 40 ~ 60Hz	-	-	-

General Specifications

Display	3½ Digit (1999 Counts) Large LCD Display with 29mm Digit Height
Over-Range Indication	'1' is displayed
Operating Temperature	0°C to 40°C (RH ≤ 80%)
Storage Temperature	- 10°C to 50°C (RH ≤ 75%)
Power	12V (Eight x 1.5V "AA" Battery) with AC Adaptor
Dimensions	190 x 155 x 75mm (approx.)
Weight	900 gms including batteries (approx.)
Standard Accessories	Test and Calibration Certificate, Insulation Resistance Measurement Test Leads for High Voltage x 1 Set, Phase Sequence Measurement Wires x 1 set, AC Adaptor x 1 pc, 1.5V "AA" Batteries x 8 pcs, Heavy Duty Carry Bag x 1 pc, Instruction Manual x 1 no.



DIT 5K10T-PI

Introduction

MECO DIT 5K10T-PI is a 5KV-10TΩ Digital Insulation Resistance Tester which measures Insulation Resistance upto 10TΩ and has a Test Voltage from 250V to 5KV. It measures AC / DC Voltage upto 1000V. It performs Polarization Index Test (P.I.), Dielectric Absorption Ratio Test (D.A.R.) and Ramp Test apart from many other functions.

This Instrument has perfect Test Functions and excellent anti-interference ability with high noise interference immunity, which makes it ideal for use in switchyards of power utilities and to check electrical insulation resistance of cables, motors, transformers switches etc. in power generation, transmission and distribution. The instrument has TFT Touch Screen Backlight Display. All test data and battery power are displayed on the TFT screen. The combination of knob switch and keys makes the operation very simple. The user has no need to memorize the operation method, as "HELP" is available on the screen by just a click and the Operation manual POPS up on the screen to effectively guide the user to operate the instrument. The instrument has the function of rapid discharge and automatically monitors the Live Voltage of the measured object to safeguard the instrument and operators safety.

Features

- Colour TFT Touch Screen Display
- Range Selection and Touch Screen Operation
- Insulation Resistance Measurement (IR) upto 10T Ohms
- Has Measurement of P.I. & D.A.R.
- Ramp Test Mode (RAMP)
- Filtered Resistance Test Mode (FR)
- Measure AC / DC Voltage upto 1000V
- Capacitance Range upto 25μF
- Measure Short Circuit Current 0.01nA ~ 7mA (max)

IP 65 Protection

- GUARD Test Lead for Surface Leakage Current Compensation
- The Instrument has hard double shell structure with outer casing which helps to prevent moisture and dust and corrosion.
- Safety Standards IEC 61010-1, IEC 61326-1
- Large Capacity Rechargeable Lithium Battery
- PC Communication - USB Cable
- Store Data upto 1000 set (Real Time Test Data with Date & Time)
- Low Battery Indication and APO Function

Application

- Power Utilities
- HV Switchyards
- Generation
- Transmission
- Distribution

- Transformers (High and Medium Voltage)
- Cables (High and Medium Voltage)
- Motors and Generators (High and Medium Voltage)
- Switchgears and Electronic Equipments
- Breakers

Electrical Specifications

Accuracy : \pm [% reading + digits] at 23°C \pm 5°C; RH <75%

Specifications	Ranges	Accuracy
Test Voltage	250V / 500V / 1000V / 2500V / 5000V	\pm [5%rdg \pm 10dgt] \pm 10V
AC / DC Voltage Measurement	0 ~ 1000V	\pm [5%rdg \pm 3V]
Short Circuit Current	0.01nA ~ 7mA (max.)	\pm [5%rdg \pm 0.5nA]
Capacitance Range	10nF ~ 25 μ F	\pm [10%rdg \pm 10nF]

Insulation Resistance Measurement Accuracy

Description	Ranges					Accuracy
Test Voltages	250V	500V	1000V	2500V	5000V	\pm [5%rdg \pm 10dgt] \pm 10V
Insulation Resistance	50.0G Ω	100G Ω	200G Ω	500G Ω	1.00T Ω	\pm [5%rdg]
	500G Ω	1.00T Ω	2.00T Ω	5.00T Ω	10.0T Ω	\pm [20%rdg]

General Specification

PI & DAR Test	Yes
Ramp Test	The output voltage will start at 10% of the preset voltage and increase in step of 10% until preset voltage is reached.
Filtered Resistance Test	10S, 20S, 30S & 40S (4 Selection)
Insulation Resistance	More than 50M Ohms at 1000V Between Test Circuit and Case
Dielectric Strength	3 KV @ 50Hz for 1 minute between Input Terminals and Case
Working Temperature	-20°C ~ 50°C (RH \leq 80%)
Storage Temperature	-25°C ~ 65°C (RH \leq 80%)
Test Timer	Time Range : 0 ~ 9999s (Automatic Record Test Time)
Storage Function	Range : 1000 Groups (Automatically store Test Data with Test Date & Time)
Upload Function	Upload the stored data to computer via UBS communication cable.
Auto Power Off	After 15 minutes start up will shut down automatically without any operation.
Safety Standard	IEC 61010 - 1, IEC 61326 - 1
Ingress Protection	IP65 (with Close Case) & IP40 (with Open Case)
Low Battery Indication	Yes
Battery Type	Rechargeable Lithium Battery
Dimension	280 x 260 x 160mm (approx.)
Weight	4900gms including battery (approx.)
Standard Accessories	Insulation Resistance Measurement Test Leads x 1 set, Alligator Type Test Leads x 1 set, USB Communication Cable x 1 No., AC Adaptor x 1 No., Power Cord x 1 No., Heavy Duty Carry Bag x 1 No., Rechargeable Lithium Battery x 1 No. (installed), Instruction Manual x 1 No.

Product Kit



S&T, CENTRAL RAILWAY,



SIGNAL & TELECOM WORKSHOP, BYCULLA, MUMBAI

Date: 19/11/2014

To,

Director,

M/s. Mecco Instruments Pvt. Ltd.

Plot No. 1, MIDC Electronic Zone,

TTC Industrial Area, Mahape, Navi Mumbai - 400 710

Tel. No. 022 - 27673300 Fax No. 022 - 27673310

Dear Sir,

Sub Performance of MECO Digital Panel Meters & Frequency Meters in our Power Indication Panel System.

Ref Our Several Purchase Order to M/s. Ajanta Enterprise, Andheri, Mumbai and M/s. Everest Trading Company, Tardeo, Mumbai.

Please refer our several purchase order in last few months to M/s. Ajanta Enterprise & M/s. Everest Trading Company, Tardeo, Mumbai for following products.

- MECO Model SMP355N 4 Digit Programmable AC Voltmeters Range 50 - 200V AC
- MECO Model SMP355N 4 Digit Programmable AC Voltmeters Range 50 - 300V AC
- MECO Model SMP355 3-1/2 Digit Voltmeters Range 0 - 200V DC
- MECO Model FDM 3AS 4 Digit Frequency Meters Range 40 - 99.99Hz at 20 - 500V AC

We have found the working of above meters in our Relay Test Room Unit is as per our requirement.

Overall the Performance of MECO meters are very satisfactory and as per accuracy specified in catalogue.

We appreciate and thanks Mr. Haren Shah of M/s. Ajanta Enterprise, Andheri, Mumbai & Mr. Ajay Shah of M/s. Everest Trading Company, Tardeo, Mumbai for their timely service with quick delivery of the above ordered meters as and when released to them.

We also thank M/s. MECO Instruments for extending timely support to our testing team as and when it was required in past. We look forward in future also to have similar kind of service and support as and when require from Mr. Haren Shah, Mr. Ajay Shah and MECO Team members.

Thanking You,

Your faithfully,

स. श्रीराम (S&T)
न. श्रीराम (S&T)
Central Railway, Mumbai
S&T, BYCULLA, MUMBAI-27.

27 AUG 2016

सीएसआईआर-केन्द्रीय खनन एवं ईंधन अनुसंधान संस्थान
(वैज्ञानिक तथा औद्योगिक अनुसंधान परिषद्)
बरवा रोड, धनबाद - 826015, झारखण्ड, भारत



CSIR-Central Institute of Mining & Fuel Research
(Council of Scientific & Industrial Research)
Barwa Road, Dhanbad - 826015, Jharkhand, India



Shri Prasad Bhukya
Scientist
Electrical Design Section
Electrical Design & Safety Research Group

SPEED POST

Ref. No.: CIMFR/EDS/PB/MIS/001

Dated: 24/08/2016

To

MECO Instruments Private limited,
Plot EL-1, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai-400710 (INDIA)
Tel: +91 -22-27673311-16(sales)

Your ref: E-mail dated 09.08.2016 from MECO (Haren Shah), Mumbai

Dear Sir,

I would like to express gratitude for providing solution to the software installation issue come across during operation of the Power and Harmonics Analyzer-5850C model to MECO Instruments Private Limited, Mumbai.

I would like to express my special thanks to Mr. Haren Shah who attended the technical problem very positively on phone and by E-mail also and later he has provided solution to software installation issue in very less time.

Thank you for your great support in minimum time.

Yours faithfully,

Prasad Bhukya
(Prasad Bhukya)

EPABX : 0091-326-229-6027/6028/6029
Fax : 0091-326-229-6025, email : dcmrps@yahoo.co.in
Working Days : Monday to Friday, Website : www.cimfr.nic.in

INDOSAW
Committed to Excellence

Date: 24.01.2023

To,

M/s. Mecco Instruments Pvt. Ltd.

Plot No. 1, MIDC Electronic Zone,

TTC Industrial Area, Mahape, Navi Mumbai - 400 710.

Tel. No. 022 - 2767 33 00 / 093233 32435

Kind Attn : Dr. Kamal Goliya - CEO / Mr. Prashant Thakkar (Marketing Manager - North India)

Sub : Products Appreciation letter for Digital LED and LCD Modules.

Dear Sir,

We thank you for your support extended to us for supply of MECO Digital LED and LCD Modules regularly for our various projects in India and for many export projects.

We are very much satisfied with the performance of these meters.

The presales and post-sales service and support offered are prompt and timely.

We hope to have good and strong business relationship with you in future as well.

Thanking You,

Your Faithfully,

अजय सागर
M/s. Osaw Industrial Products Pvt. Ltd., Ambala
Name : AJAY SAGAR
Designation : MANAGING DIRECTOR

C.C.

Mr. Prashant Thakkar (Marketing Manager - North India)

Email : prashant.thakkar@meconist.com Mobile No. : 098672 66639



CIN U29100HR1992PTC031570

OSAW INDUSTRIAL PRODUCTS PVT. LTD.

P.O. BOX NO. 42, OSAW COMPLEX, JAGADHRI ROAD AMBALA CANTT - 133001, HR (INDIA). TEL: +91-171-289347, 289347.
E-mail: osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com; osaw@osaw.com

ASC
www.ascindore.in

Deals in Educational, Industrial & Research Equipments

Associated Scientific Corporation

Date: 14.01.2023

To,

M/s. Mecco Instruments Pvt. Ltd.

Plot No. 1, MIDC Electronic Zone,

TTC Industrial Area, Mahape, Navi Mumbai - 400 710

Tel. No. 022 - 27673300

Dear Sir,

Kind Attn : Dr. Kamal Goliya - CEO

Sub Satisfactory Executions of Supply of MECO Panel Meters Model SMP48 against Purchase order No. ASC/22-23 Dt. 18.10.2022.

Please refer our above and several Purchase order for Supply of MECO Make Digital Panel Meters.

We are thank full to M/s. MECO Instruments Pvt. Ltd. Navi Mumbai for honouring timely delivery as per given schedule for all items.

We also appreciate Mr. Haren Shah for extending their excellent service during completion of order and providing / updating us time to time the proceeding in executing this order.

We look forward to have similar kind of service and support from your organization in our upcoming projects and orders.

Thanking You,
Your Faithfully,
M/s. Associated Scientific Corporation.



(Mukesh Jain)

C.C.

Mr. Haren Shah - Senior Marketing Executive


Email : haren.shah@meconist.com & harenvshah@yahoo.com Mobile No. : 9820093232

3A, Electronic Complex, Pardeshipura,
Indore-452003 (MP) India
Phone-0731-2539980, +91-9424885043,
Email: asc.indore@gmail.com, info@ascindore.in,



Testing & Measuring Instruments

- ✓ Digital Multi-Range Portable Meter
- ✓ Digital Earth Resistance Tester
- ✓ Leakage Current Tester
- ✓ Clamp-On Earth / Ground Resistance & Leakage Current Tester
- ✓ Micro – Ohmmeter / Milli – Ohmmeter
- ✓ Transformer Turns Ratio Meter
- ✓ LCR Meter
- ✓ Phase Sequence Indicator
- ✓ Inverter Analyzer
- ✓ Non-Contact Voltage Detector
- ✓ Battery / Cell Tester



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable



PM-VAC-5R
PM-VDC-5R
PM-AAC-5R
PM-ADC-5R

Accuracy : $\pm (0.5\% \text{ rdg} + 3\text{dgt})$

Model	Input	Ranges	Resolution
PM-VAC-5R	AC TRMS	0 – 200mV	0.01
		0 – 2V	0.0001
		0 – 20V	0.001
		0 – 200V	0.01
		0 – 750V	0.1
PM-VDC-5R	DC	0 – 200mV	0.01
		0 – 2V	0.0001
		0 – 20V	0.001
		0 – 200V	0.01
		0 – 1000V	0.1
PM-AAC-5R	AC TRMS	0 – 2mA	0.0001
		0 – 20mA	0.001
		0 – 200mA	0.01
		0 – 2A	0.0001
		0 – 20A	0.001
PM-ADC-5R	DC	0 – 2mA	0.0001
		0 – 20mA	0.001
		0 – 200mA	0.01
		0 – 2A	0.0001
		0 – 20A	0.001

Digital Multi-Range Portable Meters are ideal for continuous AC TRMS and DC measurements. These precision meters are of Class 0.5 and have a backlight display with annunciators for ease of reading. The meters can be used in horizontal, vertical or inclined position and there are no parallax errors. These are housed in a strong, compact and rugged casing with a tilt handle for ease of carrying. These are designed using advanced microcontrollers and SMT technology and there are no moving parts which could cause loss of accuracy or errors. There are 4 models, one each for A AC, A DC, V AC and V DC. Each model has 5 ranges thereby eliminating the need for having separate instrument for each range. There is overload indication and overload protection against accidental misuse. USB connectivity and user interface software is provided for ease of data handling and analysis. These Digital Multi-Range Portable Meters are most suitable for use in Laboratories, Engineering Schools/ Colleges Workshops and Field Measurements Applications for continuous use and can serve as a master standard meter for verification or re-calibration of secondary standard meters.

Features

- Precision Class 0.5
- TRMS Measurement
- Microcontroller Design (No Moving Parts)
- Backlight Display with Annunciators (No Parallax Errors)
- USB Port (Standard) with User Interface Software (Under development)
- Data Hold, Auto Power Off and Low Battery Indication
- Overload Indication
- Strong Rugged Casing with Tilt Stand



Specification

- 5 Digits (Except for 750V AC)
- 0.0001 to 1 Count Resolution (Depending on Range)
- 1" / 25.4 mm Digit Display
- Sampling Rate : 3 Samples / Sec
- Accuracy : $\pm (0.5\% \text{ rdg} + 3 \text{ dgt})$
- Maximum Overload : 1.2 Times (Continuous)
- Polarity Indication : " – " for Negative Input
- Power : 1.5V 'AA' Battery x 4 pcs
- Power : 6V DC Adaptor (Optional)
- Power Consumption : < 0.2 VA
- Dimension (mm) : 170 x 74 x 240 (approx.)
- Weight (Including Battery) : 850 gms approx. (Ammeter)
- 780 gms approx. (Voltmeter)
- Environment : 22 to 32°C, < 70% RH (Calibration)
- 0 to +50°C, < 70% RH (Operation)
- 10 to +60°C, < 70% RH (Storage)

Accessories

Standard : 1.5V 'AA' Battery x 4 pcs (installed), Test Leads (Red & Black for 2A continuous) x 1 pair, Instruction Manual x 1 pc. and Spare Fuse x 2 pcs (for Ammeter Only)

Optional : Test Leads (Red & Black for 20A continuous) x 1 pair, USB Cable x 1 pc, User Interface Software x 1pc




Ordering Information

Model, Test Leads (Red & Black suitable for 20A continuous) x 1 pair (Optional), USB Cable x 1 pc (Optional), User Interface Software x 1pc (Optional).



DET 909

Precision Earth Resistance Measurement

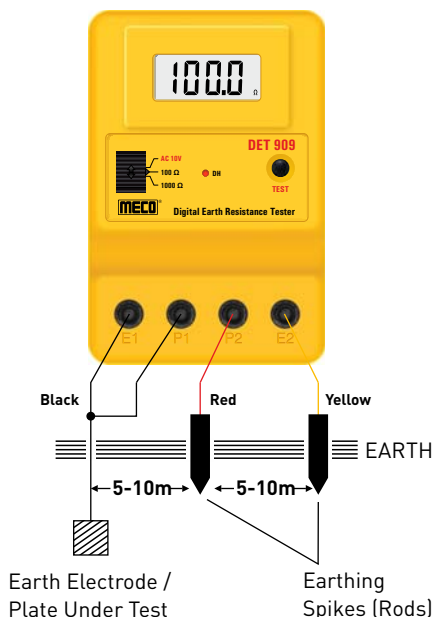

Optional

Introduction

MECO DET909 is designed with technical know how from FUSO Electric Company of Japan. It is useful for measurement of Earth Resistance of Earthing in the Electrical System. This Instrument finds wide applications for testing Earthing of installations in Power Industries, Telecommunication Networks & Electrical Systems etc. It also measures Earth Voltage. DET 909 has 820Hz test frequency which eliminates the interference due to harmonics & noise.

Features


- 3½ Digit (1999 Counts) 14 mm LCD Display with Backlight
- Auto Power Off Function (after 3-5 min.)
- Measurement Frequency 820Hz
- Capable of Measuring Earth Voltage (0 - 10V AC)
- Light Weight & Portable
- Extremely Simple to Operate Connect - Press - Read
- Designed to Reject High Levels of Noise & Interference
- Data Hold (DH) & Low Battery Indication


- Designed to Generally Conform to IS10656-1983
- Range Selection & Single Person Push Button Operation
- Switches
- Two Ranges for Earth Resistance Measurement
- Functions Icons on Display
- Re-Chargeable Battery Operated with Built-in Charger
- IEC 1010 CAT III 200V
- Sturdy, Elegant & Compact Body

Electrical Specifications

Specification	Range	Resolution
Earth Resistance	100Ω [0.3 ~ 100.0]	0.1 Ω
	1000Ω [3 ~ 1000]	1 Ω
Earth Voltage	10V AC [0 ~ 10.00]	0.01V AC

General Specifications :

Accuracy	±(3% rdg.+5 dgt.) For Earth Resistance Valid from 5% of Reading to 95% of Range	at 23°C ±5°C
	± (1% rdg. + 2 dgt.) For Earth Voltage	
Test Current	10mA AC (MAX.)	
Conversion Rate	2.5 Sec	
Over Range Indication	"1" is displayed	
Operating Temperature	0° to 50°C	
Storage Temperature	-20° to 60°C	
Relative Humidity	80% Maximum	
Low Battery	‘  ’ Is Displayed when Battery Voltage drops below Operating Voltage	
Dielectric Strength	2.5KV @ 50Hz for 1min, between Input Terminals & Case	
Insulation Resistance	More than 50MΩ @ 500V between Input Terminals & Case	
VA-Power	< 3.0VA	
Power Supply	Internal Rechargeable 1.2V ‘AA’ x 8 Batteries	
Dimensions	166 x 111 x 75mm (approx.)	
Weight	525gms. Including Battery (approx.)	
Accessories (Standard)	Carrying Case x 1, 1.2V ‘AA’ Rechargeable Batteries (fitted in) x 8, Instruction Manual x 1, Carton x 1, 2 Pin Male-Female Wire for Battery Charging	
Accessories (Optional)	Test Leads x 1 Set (Red, Yellow, Black). Earthing Spikes (Rods) x 2	

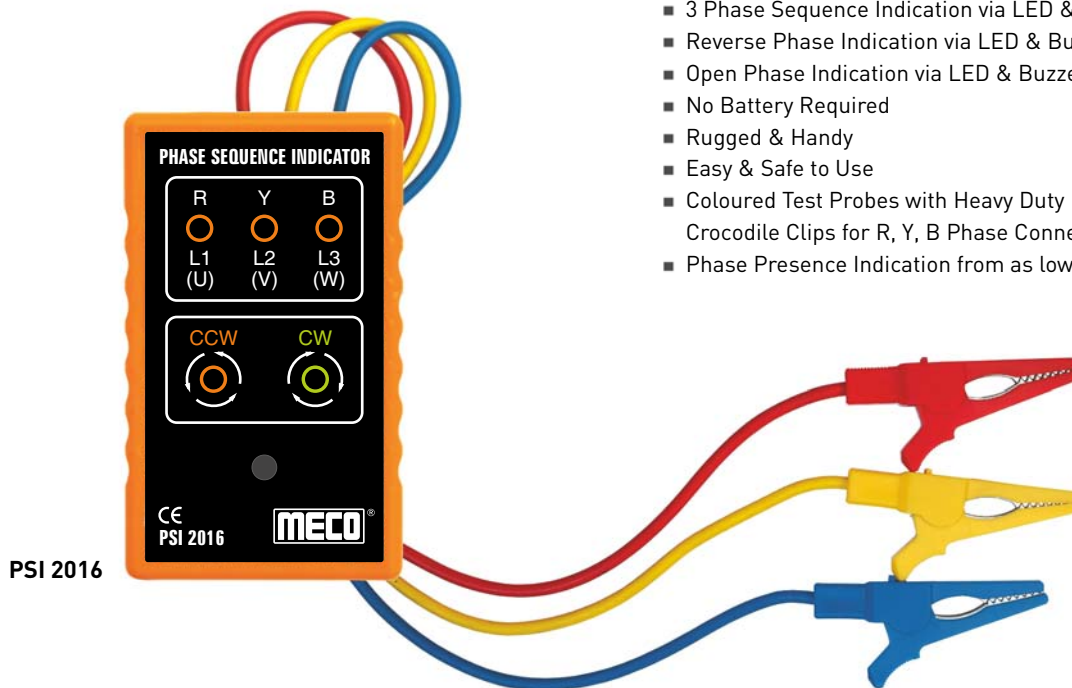

Features


- 3 Phase Sequence Indication via LED & Buzzer
- Reverse Phase Indication via LED & Buzzer
- Open Phase Indication via LED & Buzzer
- No Battery Required
- Rugged & Handy
- Easy & Safe to Use
- Coloured Test Probes with Heavy Duty Insulated Crocodile Clips for R, Y, B Phase Connections
- Phase Presence Indication from as low as 100V AC (PH-PH)

Introduction

In Electrical Systems, sometimes without identification of Phase Sequence it is impossible to proceed further. The Phase Sequence Indicator is used to determine the Phase Sequence R, Y & B of 3 Phase Voltages. It is important that Phase Sequence is known properly prior to energizing electrical motors and other equipment, as incorrect connection could cause damage to the equipment. The correct operation of measuring instruments like 3 Phase Energy Meter, 3 Phase Power Meter & Automatic Control of devices also depends on the Phase Sequence.

PHASE SEQUENCE INDICATOR 	Correct Phase (CW) <ul style="list-style-type: none"> ■ All 3 Yellow LED's ON ■ Green LED ON ■ Intermittent Beep 	PHASE SEQUENCE INDICATOR 	Reverse Phase (CCW) <ul style="list-style-type: none"> ■ All 3 Yellow LED's ON ■ Red LED ON ■ Continuous Beep 	PHASE SEQUENCE INDICATOR 	Open Phase (One Phase Only) <ul style="list-style-type: none"> ■ Yellow LED for Open Phase is OFF e.g. R Phase LED OFF ■ Both Green & Red LED's OFF ■ Continuous Beep
-------------------------------------	--	-------------------------------------	---	-------------------------------------	---

Electrical Specifications	
Voltage Range (PH-PH)	100 - 600V AC
Frequency Range	40 - 400Hz
Operating time for continuous Measurement	60 minutes Max. at 200VAC, 4 minutes Max. at 500VAC
Dielectric Strength	2000 V for one minute
Environmental Specifications	
Storage Temperature	- 20°C ~ 60°C
Operating Temperature	- 10°C ~ 40°C
Safety Specifications	
Electrical Safety	EN 61010 - 1
Over Voltage category	CAT III 600 V, CAT IV 300V
Mechanical & General Specifications	
Size	100 x 60 x 25mm (approx.)
Weight	185g (approx.)
Case & Housing Material	ABS
Accessories	Test Leads with Insulated Crocodile Clips & Carrying Case.

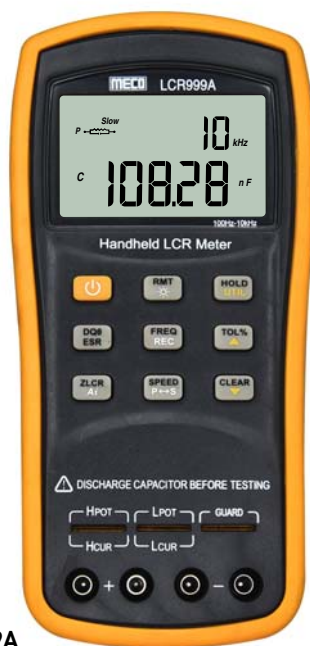

LCR999A

Features

- Basic measurement accuracy 0.1% & speed upto 10 meas / sec.
- Large LCD display with bright white backlight.
- Ultra low power consumption, battery powered for 24 hours of continuous use.
- Automatic identification function (Ai).
- Percentage display & 4 tolerance comparator : 1%, 5%, 10% & 20%
- 9V battery & External power supply
- Automatic correction function with datahold, max. / min. / average recording.
- Utility function configuration & current setup recovery after power off.
- Standard Mini-USB interface, SCPI compatible
- Auto power Off
- Constant output impedance : 100 ohm

Application

- Field maintenance test & external carrying test.
- Fixation point on production line or mobile checkout.
- Warehouse & real time spot or batch inspection.
- Flow inspect and in field measurements.

Specifications

Function		
Measurement Parameter	Primary Parameters : L / C / R / Z Secondary Parameter : D / Q / θ / ESR	
Equivalent Mode	Series, Parallel	
Auto LCR Function	Manual / Auto	
Ranging Mode	Auto	
Test Terminals	2-Terminal, 4-Terminal, 5-Terminal	
Measurement Speed	10 meas/sec (fast), 5 meas/sec (med), 2 meas/sec (slow)	
Correction	Short , Open	
Tolerance Mode	1%, 5%, 10%, 20%	
Input Protection Fuse	0.1A / 63V	
Interface	Mini-USB (Virtual Serial Port)	
Test Signal		
Signal Frequency	100Hz, 120Hz, 1KHz, 10KHz	
Test Signal Level	0.6 Vrms	
Output Impedance	100 Ω	
Basic Accuracy	0.1%	
Measuring Range	L	4 μ H ~ 1000H Range for Display 0.001 μ H ~ 1000.0H
	C	4pF ~ 20mF Range for Display 0.001pF ~ 20.000mF
	R / Z	0.4 Ω ~ 10M Ω Range for Display 0.0001 Ω ~ 10.000M Ω
	ESR	Range for Display 0.0000 Ω ~ 999.9 Ω , Resolution : 0.0001 Ω
	D	Range for Display 0.0000 ~ 9.999, Resolution : 0.0001
	Q	Range for Display 0.0000 ~ 9999, Resolution : 0.0001
	θ	Range for Display - 179.9 $^{\circ}$ ~ 179.9 $^{\circ}$, Resolution : 0.01 $^{\circ}$
Environment	0°C~40°C, ≤90% RH	
Power Supply		
Battery Model	7.2V Ni-MH 600mAH Rechargeable Battery	
AC Adaptor	Input : 220V (1±10%), 50Hz (1±5%) : Output 12V DC	
Charge Time & Current	Continuous Charge Time : Max. 80min.	Charge Current : Max. 150mA
Battery Capcity Indication	Real Time Disaplay on LCD	
General		
Dimensions	193 x 93 x 48mm	
Weight	395gms (approx.)	
Safety and EMC compliance	IEC 61010-1 : 2001, IEC 61326-2-1 : 2005	
Accessories	Manual, Short Circuit Plate x 1, 7.2V Ni MH Rechargeable Battery (installed) x 1, 12V/300mA AC Adapter x 1, 5 Terminal Kelvin Test Leads x 1	
	Optional : SMD 4 Terminal Kelvin Test Tweezers x 1, Banana Plugs-Crocodile Clip Test Leads x 1, Mini USB Communication Cable & S/W CD	



TTR 8100

Transformer is a very important element in the Electric Power Distribution System. It needs to be maintained from time to time to guarantee smooth power supply at consumer end.

MECO TTR8100 is portable instrument for accurate measurement of 1-Phase & 3-Phase Transformer VT / CT Turns Ratio, Excitation Voltage, Current, Phase Angle and Deviation. TTR8100 ensures the Correct Turn Ratio and Quality of the Transformer.

It checks live Test Points, Short Circuit, Open Circuit and Reverse Polarity before each measurement.

Features

Measurements of 1 Φ and 3 Φ Transformer / VT / CT Turns Ratio
 VT/PT Ratio 0.8~10000, CT Ratio 0.8~2000
 Graphical and Literal Illustration of Measurements and connections with Large Back-lighted Dot Matrix 240x128 LCD
 Displays Turns Ratio, Deviation, Secondary Output, Excitation Voltage and Current, Phase Angle and Nameplate Transformer / VT / CT Values in one page for easy quality interpretation.
 Check for Live Test Points, Short Circuit, Open Circuit and Reverse Polarity before each measurement.
 Store 4096 Files of Transformer Nameplate Values (VT / PT / CT, 1 Φ / 3 Φ , Test Frequency, Primary and Secondary Voltages or Ratio, RCF) and Measuring Data.

Ten test Frequencies (50~400Hz)
 9 Types of 3 Φ Winding Connections pre-installed.
 Wireless Blue Tooth Communication with PC.
 Select Filter to Remove Field noise (Slow, Normal, Fast)
 Record with Date and Time Stamp
 Powerful lithium Battery (3400mAh) with built-in Charging Circuit
 User Programmable RCF (Reference Correction Factor, 0.99~1.01) to Correct Accuracy within 1% Error
 PC Application Software Included
 Friendly File System for Easy On-site Data Retrieval and Nameplate Values Management

Reference Conditions : 23°C \pm 5°C (30 to 50% RH). Add 25ppm / °C for -0° to 18°C and 28° to 50°C to all Accuracy Specifications. No external electrical or magnetic fields. Output current \leq 150mA for VT / PT and \leq 50mA for CT. Calibration Cycle is 1 Year.

Electrical

Ratio Range (VT / PT)	Autoranging : 0.8000 to 10000:1	
Accuracy (70Hz)	Ratio Range	Accuracy (%of Reading)
	0.8000 to 999.99	\pm 0.1%
	1000.0 to 4999.9	\pm 0.2%
	5000.0 to 10000	\pm 0.25%
Ratio Range (CT)	Autoranging : 0.8000 to 2000.0	
Accuracy (70Hz)	Ratio Range	Accuracy (%of Reading)
	0.8000 to 2000.0	\pm 0.5%
Excitation Signal	VT / PT Mode : 34Vrms max CT Mode : Auto Level 0 to 1A, 0.1 to 20Vrms	
Excitation Current Display	Range : 0 to 1000mA Accuracy : \pm [2% of Reading +2mA]	
Excitation Frequency (Hz)	50, 55, 60, 70, 100, 120, 200, 240, 300, 400	
Display	5" Large Dot Matrix LCD Display (240x128) with Backlight	
Power	Rechargeable Lithium Battery, 3400mAh	
Battery Life	Over 10Hrs of Continuous Operation. Battery life (%) Indication	
Battery Charger	Universal Input (90 to 264Vrms Input)	
Charging Time	<4Hrs	
Data Storage	4096 Files Each (VTM, CTM, VTR, CTR, BMP)	
Date/Time	Battery-Backed, Real-time Calendar Clock	
Measurement Method	ANSI/IEEE C57.12.90 and IEC 60076.1	
Accessory	Test Leads x 1 Pair, Alligator Clips x 4, Rechargeable Lithium Battery x 1, Instruction Manual x 1, AC Adaptor x 1, Power Cord x 1, Software CD and Manual x 1, Carrying Bag x 1	

Application




Accessories





7002, 7272

Application

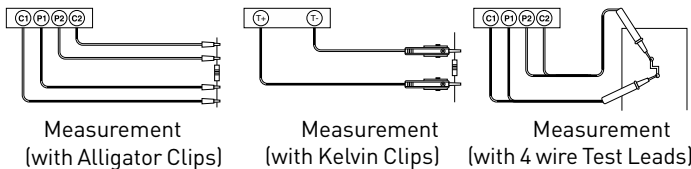

Electrical Specifications (23°C ± 5°C)

Manual Range

	Resistance Range	Resolution	Accuracy
10A (7272)	400μΩ ~ 4000μΩ	1μΩ	±0.25% ±25μΩ
	1.500mΩ ~ 16.000mΩ	1μΩ	±0.25% ±25μΩ
	5.000mΩ ~ 60.000mΩ	1μΩ	±0.25% ±25μΩ
5A (7002)	1.000mΩ ~ 8.000mΩ	1μΩ	±0.25% ±25μΩ
	5.00mΩ ~ 32.00mΩ	10μΩ	±0.25% ±250μΩ
	10.00mΩ ~ 120.00mΩ	10μΩ	±0.25% ±250μΩ
1A	4.00mΩ ~ 40.00mΩ	10μΩ	±0.25% ±250μΩ
	15.00mΩ ~ 160.00mΩ	10μΩ	±0.25% ±250μΩ
	50.00mΩ ~ 600.00mΩ	10μΩ	±0.25% ±250μΩ
100mA	0.0400Ω ~ 0.4000Ω	100μΩ	±0.25% ±2.5mΩ
	0.1500Ω ~ 1.6000Ω	100μΩ	±0.25% ±2.5mΩ
	0.5000Ω ~ 6.0000Ω	100μΩ	±0.25% ±2.5mΩ
10mA	0.400Ω ~ 4.000Ω	1mΩ	±0.25% ±25mΩ
	1.500Ω ~ 16.000Ω	1mΩ	±0.25% ±25mΩ
	5.000Ω ~ 60.000Ω	1mΩ	±0.25% ±25mΩ
1mA	4.00Ω ~ 40.00Ω	10mΩ	±0.25% ±250mΩ
	15.00Ω ~ 160.00Ω	10mΩ	±0.25% ±250mΩ
	50.00Ω ~ 600.00Ω	10mΩ	±0.25% ±250mΩ
100μA	0.0400kΩ ~ 0.4000kΩ	100mΩ	±0.75% ±3Ω
	0.1500kΩ ~ 1.6000kΩ	100mΩ	±0.75% ±3Ω
	0.5000kΩ ~ 6.0000kΩ	100mΩ	±0.75% ±3Ω

Features

- Basic Accuracy 0.25%
- Max. Test Current : 10A (60mΩ) for 7272, 5A (120mΩ) for 7002
- Manual or Auto Range
- Four Terminal Kelvin Measurement
- 6 Ranges with 1μΩ Best Resolution
- Measurement of Resistive and Inductive Materials
- Setting for HI, LO & PASS Readings
- Memory of 3000 Measurements Data
- Programmable HI-LO Alarm with memory of 20 Data
- Large LCD with Backlight & HOLD Function
- Low Power Consumption
- Battery Operated (Rechargeable Battery)
- Low Battery indication
- LED indication for Invalid Resistance Measurement
- Cable Length Measurement in feet & meters
- User Interface Software for PC Communication via RS232C (to USB Bridge) Cable
- Built-in Battery Charging Circuit & Calendar Clock

General Specifications

- Battery Charging Time 10Hrs
- AC Adaptor : Input 110V or 220VAC, Output DC 15V/1-3A
- LCD Display 4 5/6 Digit + Backlight
- Dimension : 260 x 158 x 70mm (approx.)
- Weight : 1125gms Including Battery (approx.)
- Environment : 0°C - 50°C ≤ 85% RH (Operation)
: -20°C - 60°C ≤ 75% RH (Storage)

Accessories


- Users Manual x 1 ■ Software Manual x 1 ■ Software CD x 1
- RS232C (to USB Bridge) Cable x 1 ■ AC Adaptor x 1
- 11.1V Rechargeable Lithium Battery (3400mAh) x 1
- 1 Set of Kelvin Clips ■ Carrying Bag x 1
- **Optional** : 4 Wire Test Leads (Double Prods)

Electrical Specifications (23°C ± 5°C)

Auto Range

	Resistance Range	Resolution	Accuracy
10A (7272)	400μΩ ~ 60.000mΩ	1μΩ	±0.25%±25μΩ
5A (7002)	1.000mΩ ~ 8.000mΩ	1μΩ	±0.25%±25μΩ
	8.00mΩ ~ 120.00mΩ	10μΩ	±0.25%±250μΩ
1A	4.00mΩ ~ 600.00mΩ	10μΩ	±0.25%±250μΩ
100mA	0.0400Ω ~ 6.0000Ω	100μΩ	±0.25%±2.5mΩ
10mA	0.400Ω ~ 60.000Ω	1mΩ	±0.25%±25mΩ
1mA	4.00Ω ~ 600.00Ω	10mΩ	±0.25%±250mΩ
100μA	0.0400kΩ ~ 6.0000kΩ	100mΩ	±0.75%±3Ω

Software



Application program to represent Real Time Values & Facility to open / save recorded data, plot data, export data, print display screen, parameter setting etc. The screen also displays current time, start time, system mode, sample rate, high limit, low limit, sample count & present sample value. The program also supports plotting of present or recorded data.



4680SL,
4680SLC



Resistance
Verification Plate



Carry Bag

The faults in any Electrical System are unavoidable. Earthing plays an important role in Generation, Transmission & Distribution for safe and proper operation of any Electrical Installation. **MECO 4680SL/4680SLC Clamp-On Earth / Ground Resistance Tester** has long elliptical jaw suitable for flat as well as round earthing strips. It completely eliminates the use of ground and auxiliary rods thus saving lot of time and avoiding shutdown. Calibration check can be verified by using the Resistance Verification Plate provided. This is an extremely handy instrument especially at place where it is next to impossible to measure Earth / Ground Resistance by conventional methods. Substantial time saving and easy operating justify the investment in these instruments.

Features

- Non Contact Ground Resistance Measurement
- No Auxillary Electrodes Needed
- Data Storing Memory
- Data Hold, Noise Signal & Continuity Loop Test
- Ground Resistance Measurement 0.01Ω ~500Ω
- Suitable for Earthing Strip upto 55mm
- Suitable for Round Conductor upto 20mm Φ
- Leakage Current (0.5mA~20.00A) (Model 4680SLC)
- Auto Ranging
- Auto Power Off

General Specifications

Jaw	: 55 x 32 mm (approx.)
Conductor Size	: Upto 55 mm / 20 mm Φ
Power	: Four 1.5V "AA" Battery
Display	: 4 Digit 9999 counts LCD Back Light Display
Range Selection	: Auto
Memory	: 99 Sets
Overload Indication	: OL
Low Battery Indication	:
Operating Environment	: -10°C ~ 55°C
Measuring category	: CAT III 150V IEC/EN 61010-1, Pollution Degree 2
Dimensions	: 275 x 85 x 56 mm (approx)
Weight	: 868 gms Including Battery (approx)
Accessories	: Resistance Verification Plate x 1, Battery 1.5V (AA) x 4 (Installed), User Manual x 1, Carry Bag x 1
Configurable Alarm	: Resistance : 1~199Ω & Current : 1~499mA

Electrical Specifications (23°C ± 5°C)

Ground Resistance (Auto Range) (4680SL, 4680SLC)		
Range	Resolution	Accuracy of Reading
0.010 ~ 0.099 Ω	0.001 Ω	± (1%+0.01 Ω)
0.10 ~ 0.99 Ω	0.01 Ω	± (1%+0.01 Ω)
1.0 ~ 49.9 Ω	0.1 Ω	± (1.0%+0.1 Ω)
50.0 ~ 99.5 Ω	0.5 Ω	± (1.5%+0.5 Ω)
100 ~ 199 Ω	1 Ω	± (2%+1 Ω)
200 ~ 395 Ω	5 Ω	± (5%+5 Ω)
400 ~ 500 Ω	10 Ω	± (10%+10 Ω)

Ground & Leakage Current : Auto Ranging, 50/60Hz, RMS (4680SLC)		
Range	Resolution	Accuracy of Reading
0.00 ~ 9.95 mA	0.05 mA	± (2.5%+1 mA)
10.0 mA ~ 99.0 mA	0.1 mA	± (2.5%+5 mA)
100 mA ~ 299 mA	1 mA	± (2.5%+10 mA)
0.30 A ~ 2.99 A	0.01 A	± (2.5%+0.1 A)
3.0 A ~ 9.9 A	0.1 A	± (2.5%+0.3 A)
10.0 A ~ 20 A	0.1 A	± (2.5%+0.5 A)



JAW
65
mm



4680BL,
4680BLC



Resistance
Verification Plate



Carry Bag

The faults in any Electrical System are unavoidable. Earthing plays an important role in Generation, Transmission & Distribution for safe and proper operation of any Electrical Installation. **MECO 4680BL/4680BLC Clamp-On Earth / Ground Resistance Tester** has long elliptical jaw suitable for flat as well as round earthing strips. It completely eliminates the use of ground and auxiliary rods thus saving lot of time and avoiding shutdown. Calibration check can be verified by using the Resistance Verification Plate provided. This is an extremely handy instrument especially at place where it is next to impossible to measure Earth / Ground Resistance by conventional methods. Substantial time saving and easy operating justify the investment in these instruments.

Features

- Non Contact Ground Resistance Measurement
- No Auxillary Electrodes Needed
- Data Storing Memory
- Data Hold, Noise Signal
- Ground Resistance Measurement 0.01Ω ~1000Ω
- Suitable for Earthing Strip upto 65mm
- Suitable for Round Conductor upto 25mm Φ
- Leakage Current (0.5mA~30.00A) (Model 4680BLC)
- Auto Ranging
- Continuity Loop Test
- Auto Power Off


General Specifications

Jaw	: 65 x 32 mm (approx.)
Conductor Size	: Upto 65 mm / 25 mm Φ
Power	: Four 1.5V "AA" Battery
Display	: 4 Digit 9999 counts LCD Back Light Display
Range Selection	: Auto
Memory	: 99 Sets
Overload Indication	: OL
Low Battery Indication	:
Operating Environment	: -10°C ~ 55°C
Dimensions	: 293 x 90 x 66 mm (approx)
Weight	: 1250 gms Including Battery (approx)
Accessories	: Resistance Verification Plate x 1, Battery 1.5V (AA) x 4 (Installed), User Manual x 1, Carry Bag x 1
Configurable Alarm	: Resistance : 1~199Ω Current : 1~499mA

Electrical Specifications (23°C ± 5°C)

Ground Resistance (Auto Range) (4680BL, 4680BLC)		
Range	Resolution	Accuracy of Reading
0.010 ~ 0.099 Ω	0.001 Ω	± (1%+0.01 Ω)
0.10 ~ 0.99 Ω	0.01 Ω	± (1%+0.01 Ω)
1.0 ~ 49.9 Ω	0.1 Ω	± (1.5%+0.1 Ω)
50.0 ~ 99.5 Ω	0.5 Ω	± (2%+0.5 Ω)
100 ~ 199 Ω	1 Ω	± (3%+1 Ω)
200 ~ 395 Ω	5 Ω	± (6%+5 Ω)
400 ~ 590 Ω	10 Ω	± (10%+10 Ω)
600 ~ 1000 Ω	20 Ω	± (20%+20 Ω)

Ground & Leakage Current : Auto Ranging, 45/65Hz, RMS (4680BLC)		
Range	Resolution	Accuracy of Reading
0 ~ 80 mA	0.05 mA	± (2.5%+1 mA)
80 mA ~ 650 mA	0.5 mA	± (2.5%+2 mA)
650 mA ~ 4 A	5 mA	± (2.5%+10 mA)
4 A ~ 30 A	10 mA	± (2.5%+20 mA)

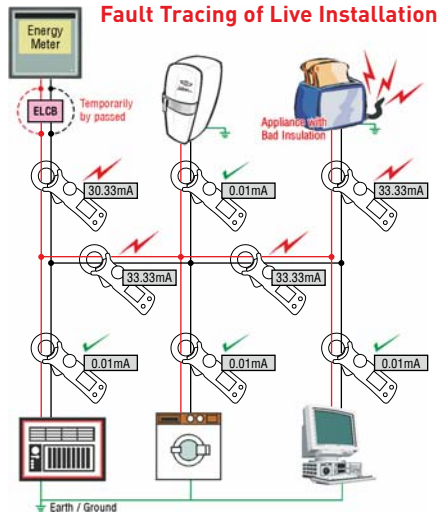

4671




4671A




Display	3½ DIGIT 4000 COUNTS	3½ DIGIT 1999 COUNTS
Jaw Opening	30mm (Approx.)	30mm (Approx.)
AC Current	Range : 40 / 400mA / 4 / 40 / 60A Resolution : 10 / 100µA / 1 / 10 / 100mA Accuracy : 50 / 60Hz ±(1.0% rdg ± 3dgt) for 40mA to 40A ±(1.5% rdg ± 3dgt) for 60A (0~50A) ±(3.0% rdg ± 5dgt) for 60A (50~60A) Accuracy : (40Hz ~ 1KHz) ±(2.0% rdg ± 5dgt) for 40mA to 40A ±(3.0% rdg ± 5dgt) for 60A (0~50A) ±(3.5% rdg ± 5dgt) for 60A (50~60A)	Range : 20 / 200mA / 2 / 60A Resolution : 0.01 / 0.1mA / 0.001 / 0.1A Accuracy : 40Hz ~ 400Hz ±(2.5% rdg ± 5dgt) for 20mA to 2A ±(3.0% rdg ± 8dgt) for 60A
AC Voltage	Range : 400V, Resolution : 0.1V Accuracy : ±(1.5% rdg ± 2dgt) for 50 / 60Hz ±(2.0% rdg ± 4dgt) for 40 ~ 1KHz	Range : 600V, Resolution : 1V Accuracy : ±(2.0% rdg ± 5dgt) for 40Hz ~ 400Hz
DC Voltage	-	Range : 600V DC, Resolution : 1V Accuracy : ±(2.0%rdg ± 5dgt)
Resistance And Continuity	Range : 40 ~ 400Ω, Resolution : 0.1Ω Accuracy : ±(1.0%rdg ± 2dgt), Beeping : <38.0Ω OL Protection : 600V AC	-
Frequency Response	40Hz ~ 1KHz	40Hz ~ 400Hz
Relative Measurement	✓	-
Data Hold	✓	✓
Max/ Min Hold	✓	-
Auto Power Off	✓	✓
Low Battery Indication	✓	✓
Sampling Time	3 Time/sec.(display), 30 Time / Sec (Bargraph)	3 Time / Sec
Power	Two 1.5V 'AA' Battery	Two 1.5V 'AAA' Battery
Operating Environment	-10° to 50°C, RH < 85%	-10° to 50°C, RH < 85%
Storage Environment	-20° to 60°C, RH < 75%	-20° to 60°C, RH < 75%
Altitude	UP TO 2000M	UP TO 2000M
Dimensions	210 x 72 x 36mm (Approx.)	183 x 63 x 29mm (Approx.)
Weight	210gms Including Battery (Approx.)	160gms Including Battery (Approx.)
Accessories	Battery (Installed), Test Leads x 1 Pair, Carrying Case x 1, User Manual x 1	Battery (Installed), Test Leads x 1 Pair, Carrying Case x 1, User Manual x 1

Application

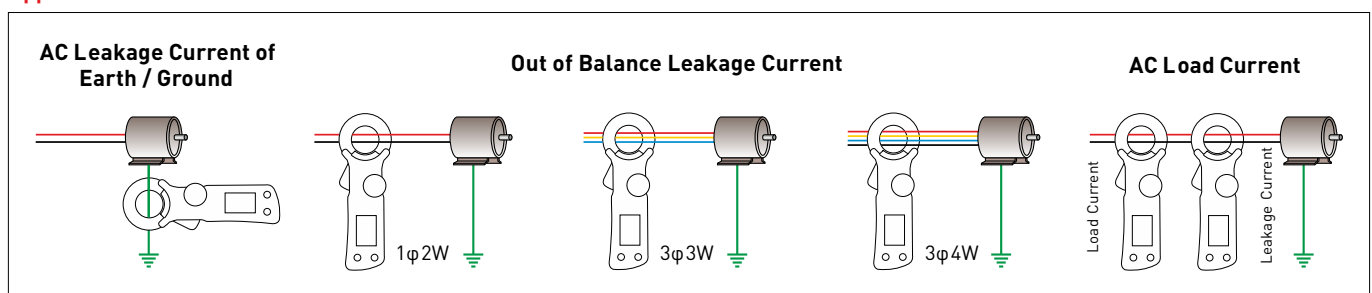




NCVD-1000S

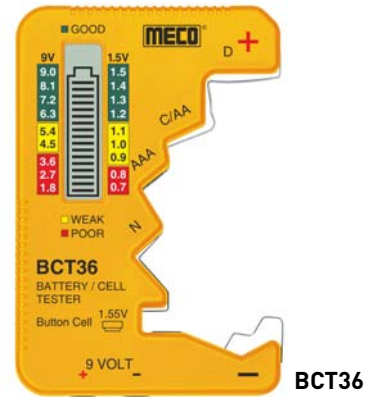

BCT36

Applications

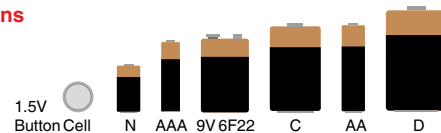

Functions	Safe Non Contact Voltage Detection, Torch Light, Auto Power Off
Voltage Range	90 ~ 1000V AC
Frequency Range	50 ~ 60Hz
Alarm Mode	Bright RED LED with Audible Sound (Buzzer)
Torch	White LED Illumination
NCV Sensitivity	Fixed
Measurement Category	CAT III 1000V AC
Power	1.5V AAA x 2 Batteries
Auto Power Off	5 Min. (approx.)
Dimension	148 x 26 x 18mm (approx.)
Weight	38gms (approx.) Including Batteries
Accessories	1.5V (AAA) x 2 Batteries, Blister


Introduction

This compact Battery / Cell Tester checks the capacity condition of various type of batteries / cell i.e. Button Cell, N, AAA, 9V 6F22, C, AA, D etc. The Battery / Cell Tester helps to identify the WEAK and POOR batteries so that they can be weeded out from the system before they make the complete system unreliable.

The state of Battery / Cell is indicated on the tester display as Green "GOOD", Yellow "WEAK" and Red "POOR" directly.

Battery / Cell Condition

Indication	1.5V Battery / Cell	9V Battery
GOOD	1.2V ~ 1.5V	6.3V ~ 9V
WEAK	0.9V ~ 1.1V	4.5V ~ 5.4V
POOR	0.7V ~ 0.8V	1.8V ~ 3.6V
Dimension	95 x 63 x 15mm (approx.)	
Weight	30gms (approx.)	

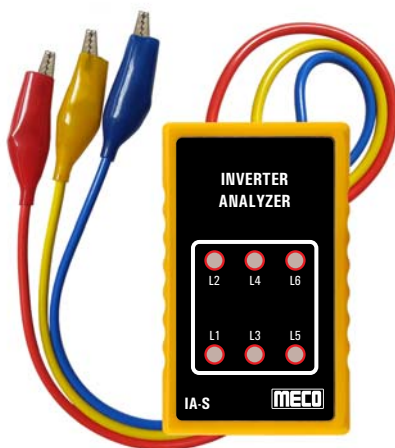

IA-S

Features

- Helps to Diagnose Fault in Inverter Based Products 60 - 600V AC, 40 - 400Hz (Max. for 5 minutes)
- No Battery Required
- Rugged, Handy, Easy and Safe to Use
- Color Identified Test Probes with Insulated Crocodile Clips for R, Y, B Connections
- LED Based Instant Diagnosis

Introduction

Inverter Analyzer is suitable to check all inverter products. It can be used to analyze the fault in Air Conditioners (AC's), Refrigerators etc. It helps to diagnose whether there is a Compressor failure or a PCB failure.

Working

In case of a breakdown,

Step 1 : Turn the power off.

Step 2 : Remove the connections between the Compressor and PCB.

Step 3 : Check and ensure that the charged voltage of built-in smoothening electrolytic capacitor drops to < 10V DC or below while carrying out any service.

Step 4 : Connect Inverter Analyzer instead of Compressor by connecting the faston terminals of the PCB to the Crocodile Clips of the Inverter Analyzer (R, Y, B respectively). Be careful not to touch the Crocodile Clips (R, Y, B) with each other.

Step 5 : Turn the power on and operate the A.C. or Refrigerator.

Step 6 (Diagnosis) : When all LED's of the Inverter Analyzer are lit uniformly, it means the PCB is proper and Compressor is faulty. When any / all LED's are not uniformly lit, it means there is fault in the PCB.

Step 7 : On completion of diagnosis, be sure to switch off the power. Then remove the connections of the Crocodile Clips of the Inverter Analyzer. Re-connect the faston terminals of the PCB to Compressor firmly. Loose connections may lead to burning of the terminals.

24 DEC 2015
ACCOLADE
ELECTRONICS PVT. LTD.
24th Floor, TTC Industrial Area, Mahape, Navi Mumbai - 400710
CIN: U72900MH2008PTC186975

☎ +91 20 32 52 82 14 / 15
☎ +91 20 25 29 39 57
✉ info@accoladeelectronics.com
🌐 www.accoladeelectronics.com

Data Connectivity, Interface Solutions
Application Specific Medical Controllers
Embedded Systems & Solutions

To,
MECO METERS PRIVATE LTD.
Plot No. EL-60, MIDC Electronic Zone, TTC Industrial
Area, Mahape, Navi Mumbai 400710, INDIA

21st December 2015.

Subject: Customer appreciation letter.

Dear Sir,

As one of your customers, we purchased a Universal Calibrator-90P from your company. We wanted to say thank you for the assistance you gave us in purchasing the product and training to our Technical Team. We can say that we are greatly satisfied with the Universal Calibrator-90P which we bought from your company.

Again, we wanted to let you know that we greatly appreciate the effort of your company especially your personal attention & your great customer service.

Thanking you,

Deepak Jagdale
Director
Accolade Electronics Pvt. Ltd.
Pune

Reg. Office : 19-20, Fly View, Near Fly Over, Warje, Pune - 411 058 (India).
Works : Ghare Complex, S. No. 78/1, Dangat Industrial Estate, Shivajinagar, Pune - 411 023.

Date: 15.03.2022

Phillips
MACHINE TOOLS



To,
Dr. Kamal Goliya - CEO
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai - 400 710
Tel. No. 022 - 27673300

Dear Sir,

Sub Satisfactory Executions of Supply of MECO Testing Instruments against Purchase order No. PO-21-22-011442, 001443 dt. 07.08.2021 & PO 004512 Dt. 30.10.2021 for Karnataka Govt. ITI Projects with Tata Technologies Ltd.

Please refer our several above Purchase order for Supply of MECO Products against above mentioned projects. We are thank full to M/s. MECO Instruments for honouring timely delivery as per given schedule for all items.

We appreciate Mr. Haren Shah - Senior Marketing Executive for extending his excellent service during completion of order and providing / updating us time to time the proceeding in executing this order.

We look forward to have similar kind of service and support from your organization in our upcoming projects.

Thanking You,
Your Faithfully,
For M/s. Phillips Machine Tools India Private Limited.



Mr. Shrikant Kumar
Assistant Manager - Sales Support



c.c.
Mr. Haren Shah - Senior Marketing Executive
Email : haren.shah@mecoinst.com & harenvishah@yahoo.com
Mobile No. : 9820093232

PHILLIPS MACHINE TOOLS INDIA PVT. LTD.
W-225, TTC Industrial Area, MIDC Khairi, Koparkhaim, Navi Mumbai - 400705, Maharashtra, India.
☎ +022 6139 2800 | Email: support.india@phillipscorp.com | www.phillipscorp.com
CIN No.: U72200MH2008PTC186975


28 NOV 2013



TO WHOMSO EVER IT MAY CONCERNED


We have purchased the Power and Harmonic Analyzer model PHA 5850 from Meco Instruments Pvt Ltd, Mumbai and the performance of the instrument during the energy audit was found to be excellent. I also appreciate the excellent service support provided by Mr Haren Shah during the last 2 years in formulating the Energy Audit reports and also software support in case of an emergency at the field.

I find the Analyzer PHA 5850 is a very cost effective and an efficient Electrical tool and is essential for an Energy auditor.

For Tata Global Beverages Ltd

Radhakrishnan Nair R
(Sr Manager- Engineering and Establishments)

Date 22.11.2013

TATA GLOBAL BEVERAGES LIMITED
Kirkoskar Business Park Block C, 3rd & 4th Floor, Hebbai, Bengaluru 560 024
Tel 91 80 67171200 Fax 91 80 67171201
Registered Office 1 Bishop Lefroy Road, Kolkata 700 020



NO RELIGION IS GREATER THAN TRUTH


MAHATMA EDUCATION SOCIETY
Dr. K. M. Vasudevan Pillai's Campus, 10, Sector 10, New Panvel - 410 206.
Tel : 2745 1709 / 2745 6100 / Fax : 9122 2748 3208 website : www.vpillaiscampus.ac.in

TO WHOMSO EVER IT MAY CONCERNED

We have purchased the Power and Harmonic Analyzer model PHA-5850 B from MECO Meters Pvt. Ltd, Navi Mumbai and the performance of the instrument during the energy audit was found to be excellent.

I also appreciate the excellent service support provided by Mr.Haren Shah during the last one year in formulating the Energy Audit report and also software support in case of an emergency at the field.

I find the Analyzer PHA 5850B is a very cost effective and an efficient Electrical tool and is useful for an Energy auditor.

For Mahatma Education Society,

M.V. Padmanabhan
FIE(I),Sr.M.IEEE(USA)
Consultant(Electrical System)
Dt.26thNov.2013.

Regd. Office : Chembur Naka, Mumbai - 400 071. Tel : 2522 4850 / 2522 8414 Fax : 91 22 2522 9587
email : vpilais@vpiastm01.vsnl.net.in



Automotive and Battery Capacity Testers / Meters

- ✓ Battery (Load) Testers (Digital)
- ✓ Vehicle Battery System Meters
- ✓ Multifunction Automotive Meter
- ✓ Digital Automotive Multimeter
- ✓ Battery Capacity (Impedance) Testers



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable



DBM72

Features

- 80A Discharge Current Load Test for 6V / 12V (40Ah ~ 200Ah) Lead Acid and Li-ion Battery
- Built-In 10 Seconds Timer to Auto Cut-off Load After Test
- Temperature Rise is Controlled (for Circuit Protection)
- Two Way Internal Resistance Measurement (Load Test Method & 4-Wires Method)
- Auto Data Hold

Specifications	Range
Battery Type	Lead Acid & Li-ion Battery
Battery Voltage	6V / 12V DC
Battery Capacity	40 Ah ~ 200Ah
Battery Load Test Current	80A
Load Test Time Control Timer	<10 Seconds
Battery Drop Voltage in Load Test	✓
Temperature Control in Load Test	✓
Battery Internal Resistance by Load Test	Dropped Voltage
Battery Internal Resistance by 4 - Wires Test	0 ~ 99mΩ ±5%
Battery Conclusion by Load Test or by 4 - Wires Test	GOOD / WEAK / BAD
Reverse Polarity Protection	✓
Detect and Display Bad Cell	✓
Missing Lead Detection	✓
Overload Protection of Input Voltage	✓
Safety Standard	CAT I 48V
Cable Length	300mm (approx.)
Dimension	205 x 115 x 70mm (approx.)
Weight	900g (approx.)



MBM27

Features

- Key Parameters Measured for Diagnosis of Motorcycle / Two Wheeler Vehicle Battery and Electrical System.
- 12V (3 to 20Ah) Lead Acid Wet and Dry Charged Batteries of Motorcycle and Two Wheelers.
- Three Testing References by Battery Type (Wet Charged Battery), CCA Rating (Dry Charged Battery) and Ah Rating (General Purpose Cranking Battery).
- Display of Battery Condition [Good / Caution / Replace].
- Reverse Polarity Protection and Overload Voltage Protection to ensure Operator Safety.

Specifications	Range
Battery Test	✓
Engine Cranking Load Test	✓
Charging System Test	✓
CCA Range	100 ~ 1000
Ah Range	3 ~ 20Ah (not continuous)
State of Charge (SOC)	0 ~ 100%
State of Health (SOH)	0 ~ 100%
Voltage Range	9 ~ 16V ± 3%
Internal Resistance	0 - 99mΩ ± 5%
Display Battery Internal Resistance	Milli Ohms
Display Battery Voltage	Volts
Display Battery Condition	Good / Caution / Replace
Test 12V Batteries	✓
Battery Recharge Indication	✓
Reverse Polarity Protection	✓
Detect and Display Bad Cell	✓
Loose Lead Detection	✓
Overload Protection of Input Voltage	✓
Cable Length	700mm (approx.)
Dimension	146 x 82 x 25mm (approx.)
Weight	266g (approx.)



Features

- Key Parameters Measured for Diagnosis of Vehicle Battery & Electrical System
- Overload Protection to ensure Operator Safety
- Loose Lead Detection
- Reverse Polarity Protection
- Internal Unit Conversion CCA / IEC / EN / DIN
- Battery Recharge Indicator, Detects and Displays Bad Cell and Overload Protection of Input Voltage

Specifications	VBSM6129B+	VBSM6246	VBSM6246P
Battery Test	✓	✓	✓
Engine Activation Load Test	✓	✓	✓
Maximum Load Test	✓	✓	✓
Charging System Test	✓	✓	✓
CCA & EN Range	100 ~ 1700	100 ~ 1700	100 ~ 1700
IEC & DIN Range	100 ~ 1000	100 ~ 1000	100 ~ 1000
State of Charge (SOC)	0 ~ 100%	-	-
State of Health (SOH)	0 ~ 100%	0 ~ 100%	0 ~ 100%
JIS Range	Refer Table in Instruction Manual	Refer Table in Instruction Manual	Refer Table in Instruction Manual
Ah Range	3 ~ 250Ah	-	-
Display Battery Internal Resistance	0 ~99 Milli Ohms (±5%)	0 ~99 Milli Ohms (±5%)	0 ~99 Milli Ohms (±5%)
Display Battery Voltage	Volts	Volts	Volts
Display Battery Condition	Good / OK / Pay Attention / Replace	Good / OK / Pay Attention / Replace	Good / OK / Pay Attention / Replace
Thermal Printer	-	-	✓
Test Batteries	12V	12V / 24V	12V / 24V
Battery Recharge Indication	✓	✓	✓
Reverse Polarity Protection	✓	✓	✓
Detect and Display Bad Cell	✓	✓	✓
Loose Lead Detection	✓	✓	✓
Internal Unit Conversion EN, IEC, DIN	✓	✓	✓
Overload Protection of Input Voltage	✓	✓	✓
LCD with Backlight	✓	✓	✓
Safety Standard	CAT III 600V	CAT III 600V	CAT III 600V
Cable Length	700mm (approx.)	700mm (approx.)	700mm (approx.)
Dimension	125 x 70 x 34mm (approx.)	180 x 90 x 32mm (approx.)	235 x 90 x 50mm (approx.)
Weight	400g (approx.)	400g (approx.)	450g (approx.)




User Changable
Pinpoint or Hook
Test Leads



MAM6138



LCD Screen

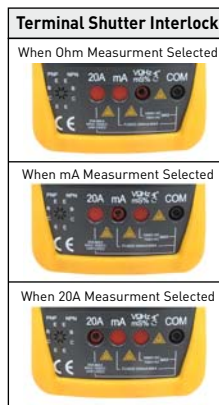

6255



Features

- 3 in 1 Automotive Auto Ranging DMM, Power Probe & Logic Probe
- Pen Type Design Perfect for Automotive Diagnosis
- Hands - Free Test Leads for Excellent Convenience
- Flashlight for Operation of Automotive Diagnosis
- Auto Range, Auto Power Off, Low Battery Warning & Data Hold

Specification	Range	Accuracy
VDC	200mV / 2V / 20V / 200V / 600V	± (0.5% + 5)
VAC	2V / 20V / 200V / 600V	± (1.2% + 5)
Resistance	200 / 2000 / 20K / 200K / 2M / 20MΩ	± (0.8% + 5)
Continuity Buzzer & Diode	✓	NA
Logic Test	6V / 12V / 24V	
Test Lighter (Bulb Style Circuit Tester)	12V / 24V	
Flash Light, Data Hold, Auto Power Off	✓	
Auto & Manual Range, Low Battery Warning	✓	
Power Source	1.5V AA x 2	NA
Max. Display	1999	
Dimension	210 x 60 x 32mm (approx.)	
Weight	240g (approx.)	

DMM Mode



Logic Probe Mode



Test Light Mode



Flash Light



Features

- Terminal Shutter Interlock Mechanism Prevents Wrong Operations
- 11 Functions
- Heavy Duty Rubber Holster
- Data Hold, Auto Power Off
- Measurement of Duty, Ignition Frequency, Ms-Pulse Width, RPM & DWELL

Specifications	Range	Accuracy
Ignition Frequency	0.1Hz ~ 20KHz	± (1.5% + 10)
Pulse Width	0.1 ~ 999.9ms	± (1.5% + 10)
RPM	2STR : 300 ~ 19999 rpm 4STR : 600 ~ 19999 rpm	± (3% + 5)
DC V	20V / 200V 1000V	± (0.5% + 3) ± (0.8% + 3)
AC V	20V / 200V 700V	± (1% + 5) ± (1.2% + 5)
DC A	20mA / 200mA 20A	± (1.5% + 5) ± (2% + 10)
AC A	20mA / 200mA 20A	± (2% + 5) ± (3% + 10)
Resistance	200Ω 2K / 20K / 200K / 2M	± (1% + 5) ± (1% + 1)
Frequency	2KHz / 20KHz	± (1.5% + 10)
Temperature	-40 ~ 0°C 0 ~ 400°C 400 ~ 1000°C	± (5% + 5) ± (1% + 3) ± (2% + 3)
DUTY	0.1% ~ 99.9%	NA
DWELL	1 / 2 / 3 / 4 / 5 / 6 / 8	± (3% + 5)
Continuity Buzzer	✓	NA
Diode Test	✓	
Transistor Test	✓	
Power Source	9V Battery	
Dimension	200 x 85 x 38 mm (approx.)	
Weight	800g (approx.)	

What is Internal Resistance of Battery?

One of the basic requirements of a battery for digital applications is low internal resistance. Measured in milliohms, the internal resistance is the gatekeeper that, to a large extent, determines the runtime. The lower the resistance, the less restriction the battery encounters in delivering the needed power. The internal resistance (IR) of a battery is defined as the opposition to the flow of current within the battery. There are two basic components that impact the internal resistance of a battery; they are electronic resistance and ionic resistance. The electronic resistance plus the ionic resistance will be referred to as the total effective resistance.

How does Internal Resistance affect Performance?

Storage batteries are repeatedly charged and discharged over a long interval. This tends to gradually deteriorate the battery performance and the internal resistance increases until charging is no longer possible. Faults may also be caused by internal short-circuits, reducing the battery voltage, making the battery over-heat or in the case of a short-circuit caused by corrosion, possibly even leading to a fire.


A high mW reading can trigger an early 'low battery' indication on a seemingly good battery because the available energy cannot be delivered in the required demand and remains inside the battery.

The internal resistance of a battery is dependent on the specific battery's size, chemical properties, age, temperature and the discharge current.



Effects of internal battery resistance

A battery with low internal resistance delivers current to the equipment (Load) as per requirement. High internal resistance causes battery voltage to drop. Because of drop in voltage, current flowing to the equipment (Load) gets cut-off leaving energy in the battery.

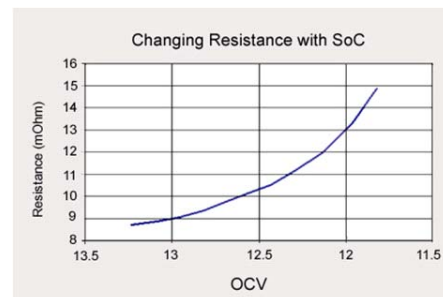

Typical internal resistance readings of a lead acid battery

The readings were taken at open circuit voltage (OCV).

MECO Battery Capacity Tester


In the modern age with the increase in various portable devices, maintenance of batteries has become crucial as the performance of these devices depend on life of batteries. Because of continues charging and discharging of batteries their performance gradually deteriorates until charging is no longer possible which may result in sudden failure of the system.

MECO Batter Capacity Testers can give quick results on the state of a battery either as PASS, WARNING or FAIL which is based on comparator settings of internal resistance and the voltage for various batteries. MECO Battery Capacity Testers can check all types of batteries including Nickel-Metal Hydride batteries (NiMH), Nickel Cadmium batteries (NiCd), Lithium-Ion batteries (Li-ion), Alkaline batteries and Lead-Acid batteries. Users can choose from 2 models to suit their applications : Battery Capacity Tester Model 6363 for testing batteries upto 40V and 500Ah and Battery Capacity Tester Model 6390 for testing batteries upto 60V and 1200Ah.

The analysis of batteries state is PASS / WARNING / FAIL based on a six-way combination of comparisons against upper and lower limits of Internal Resistance and Voltage threshold. This result is then indicated by LEDs and a Beeper.

Comparator Table

Resistance	Low Limit Resistance		High Limit Resistance		
Voltage	Lo	↓	Middle	↓	Hi
Voltage Lo	WARNING Beeper		WARNING Beeper		FAIL Beeper
Comparison →					
ValueHi	PASS		WARNING Beeper		FAIL Beeper

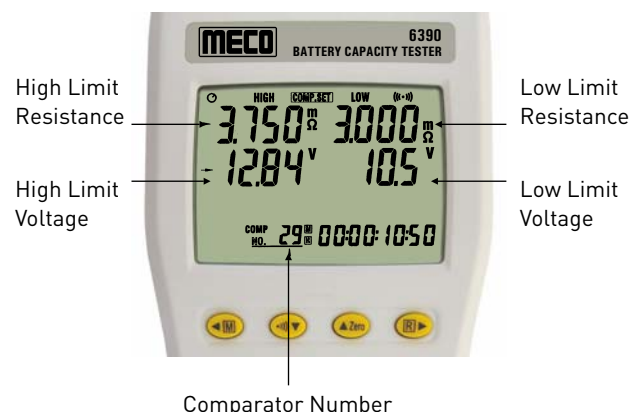

Applications (For 6363 & 6390)

For Manufacturers, R & D Units, Service Centers, Technicians, Dealers & Service Executives in following industries

- Battery
- UPS
- Automobile
- Emergency Power Backup
- Solar Energy
- Wind Energy
- Lift
- Crane & forklift
- IT
- Telecom
- Aircraft
- Railways



BCM 6300

Features

- Right Device to Know the TRUE-LIFE of Battery Capacity (Internal Resistance / Voltage & Temperature) Simultaneously Measured
- 4 Wire Kelvin measurement
- On-line Testing without shutting down battery
- Auto Ranging
- Large LCD with backlight
- Built-in Comparator Function
- Rates Condition as PASS, WARNING or FAIL
- Compact and Lightweight
- Auto Power Off
- Data Hold and Low Battery Indication

Specifications

Battery Types Tested	Lithium Batteries, Nickel-Cadmium Batteries, Lead-Acid Batteries, Alkline batteries or other types of Batteries etc.
Resistance	Ranges : 19.999mΩ, 199.99mΩ, 1.9999Ω, 19.999Ω and 199.99Ω (Auto Ranging) Resolution : 1μΩ, 10μΩ, 100μΩ, 1mΩ and 10mΩ Accuracy : ± (0.8% + 10 dgt) on all ranges except ± (1% + 10 dgt) for 19.999mΩ
Measurement Condition	Current : 50mA, 5mA, 500μA and 50μA Frequency: 1KHz AC ± 10%
Voltage	Measurement : ± 0.000V to 99.999V AC Resolution : 1mV DC Accuracy : ± (0.5% rdg + 5 dgt) Maximum Display Value : ± 99.999V DC
Ambient Temperature Measurment	Range : -10°C to 50°C Resolution : 0.1°C Accuracy : ±1.5°C Maximum Display Value : 50.0°C
Measurment Speed	3 Times / Second
Open Circuit Terminal Voltage (AC)	≤ 2.5V _{pp}
Comparator Settings	Resistance High and Low Limits and Voltage Throughhold Point
Number of Comparator Settings	30 Sets
Operating Environment	0°C to 40°C (32°F to 104°F1, 80% RH or Less, Non-Condensing
Storage Environment	-10°C to 50°C (10°F to 122°F1, 80% RH or Less, Non-Condensing
Maximum Input Voltage	100V DC
Power Supply	Six 1.5V "AA" Size Batteries
Battery Life	9 Hours (approx.)
Dimensions	175 x 40 x 105 mm (approx.)
Weight	490gms Including Batteries (approx.)
Accessories	Kelvin Four Wire Test Lead x 1 Pair, Kelvin Four Wire Pin Type Test Lead x 1 Pair, Kelvin Four Wire Big Alligator Test Lead x 1 Pair, Test Jig For Alkaline Batteries x 1 pc, Batteries (installed) and User Manual x 1




Product Kit



6363



Top Connections



Software Window



Features

- Memory & Read Function
- Right Device to know the TRUE-LIFE of Battery Capacity (Resistance / Voltage) Simultaneously Measure
- On-line Testing without shutting down battery
- Built-in Comparator Function
- Rates Conditions as PASS, WARNING or FAIL
- Datalogging Memory Function
- Compact and Lightweight
- USB Interface & Software
- Auto Power Off

Specifications

Battery Types Tested	UPS Battery, Motor Cycle (6V/12V : 2 ~ 20Ah), Car (12V : 21 ~ 80Ah), Truck (12V : 83 ~ 160Ah) Household Appliances [(9V : upto 625mAh), (AA : upto 2850mAh), (AAA : upto 1250mAh), (C : upto 8350mAh), (D : upto 20500mAh)], Lithium Notebook Battery [(14.8V : 3600 ~ 4800mAh), (11.1V : 3600 ~ 7200mAh)], Lithium Digital Camera Battery (3.7V : 650 ~ 1350mAh), Lithium Cordless Phone Battery (3.7V : 800 ~ 1250mAh),
Battery Capacity	0 to 500Ah
Resistance	Ranges : 40mΩ, 400mΩ, 4Ω, 40Ω Resolution : 10μΩ, 100μΩ, 1mΩ, 10mΩ Accuracy : ± (1% rdg + 10 dgt) on all Ranges
Measurement Condition	Current : 25mA, 2.5mA, 250μA, 25μA Frequency : 1KHz ± 10%
Voltage	Measurement : 4V, 40V Resolution : 1mV, 10mV Accuracy : ± (0.1% rdg + 6 dgt)
Open Circuit Terminal Voltage	≤ 3.5V _{pp}
Manual Data Logging	500 Sets
Continuous Data Logging	9600 Sets
Comparator Settings	Resistance High and Low Limits and Voltage Throughhold Point
Number of Comparator Settings	99 Sets
Operating Environment	0°C to 40°C (32°F to 104°F1, 80% RH or Less, Non-Condensing
Maximum Input Voltage	50V DC
Power Supply	Six 1.5V "AA" Size Batteries
Battery Life	7 Hours
Dimensions	250 x 100 x 45 mm (approx.)
Weight	490gms Including Batteries (approx.)
Accessories	Instruction Manual x 1, Batteries (installed), Test Probe (Alligator Clips) x 1, USB Cable x 1, Software Disk x 1, Carrying Bag x 1



DC Current Adaptor



6390



Features

- Right Device to know the TRUE-LIFE of Battery Capacity (Resistance / Voltage / Current & Temperature) Simultaneously
- Measure battery charge / discharge capacity (Ah)
- Measure battery State of Charge SOC (%)
- On-line Testing without shutting down battery
- Built-in Comparator Function
- Rates Conditions as PASS, WARNING or FAIL
- Auto Datalogging (Micro SD Card) upto 99 blocks
- Compact and lightweight
- USB Interface & Software
- Load Test Analysis (Charge / Discharge)
- Auto-Hold & Auto-Data Storage
- Wide Range 0 ~ 1200 Ah
- Auto Power Off
- Memory & Read Function

Software Window



Specifications

Battery Types Tested	UPS Battery, Motor Cycle (6V/12V : 2 ~ 20Ah), Car (12V : 21 ~ 80Ah), Truck (12V : 83 ~ 160Ah) Household Appliances [(9V : upto 625mAh), (AA : upto 2850mAh), (AAA : upto 1250mAh), (C : upto 8350mAh), (D : upto 20500mAh)], Lithium Notebook Battery [(14.8V : 3600 ~ 4800mAh), (11.1V : 3600 ~ 7200mAh)], Lithium Digital Camera Battery (3.7V : 650 ~ 1350mAh), Lithium Cordless Phone Battery (3.7V : 800 ~ 1250mAh),
Battery Capacity	0 to 1200Ah
Resistance	Ranges : 4mΩ, 40mΩ, 400mΩ, 4Ω, 40Ω, 400Ω Resolution : 1μΩ, 10μΩ, 100μΩ, 1mΩ, 10mΩ, 100mΩ Accuracy : ± [0.8% rdg + 6 dgt] on all Ranges except ± [3% rdg + 20 dgt] on 4mΩ
Measurement Condition	Current : Approx. 40mA, 4mA, 400μA, 40μA, 4μA Frequency: 1KHz ± 30Hz
DC Voltage	Range : 6V, 60V; Resolution : 1mV, 10mV; Accuracy : ± [0.1% rdg + 6 dgt]
Temperature	Range : -20°C to 60°C (-4°F to 140°F); Resolution : 0.1°C / 0.1°F; Accuracy : ± [1°C/±1.8°F]
DC Current	Range : 600V; Resolution : 0.1A; Accuracy : ± [2% rdg + 2 dgt]
Open Circuit Voltage	5V Max.
Data Logging	Manual Datalogging : 999 Sets (Can be read by Meter & Download by PC) Auto Datalogging : Micro SD card (Max. 99 Blocks)
Comparator	Setting : Resistance Upper and Lower Limits and Voltage (Threshold) Upper and Lower Limit Memory : 99 Sets of Values
Operating Environment	0°C to 40°C (32°F to 104°F), 80% RH or Less, Non-Condensing
Power Supply	Six 1.5V "AA" Size Alkaline Batteries
Battery Life	5.5 Hours
Standard	IEC 61010-1, 1000V Insulation CAT III, Pollution Degree 2
Dimensions	198 x 94 x 49 mm (approx.)
Weight	530 gms Including Battery (approx.)
Accessories	Alligator Clip Type Test Lead with Temperature Sensor x1, Pin Type Test Lead x 1, DC Current Adaptor x 1, Zero Adjustment Board x 1, Instruction Manual x 1, AA 1.5V Batteries x 6, AC Adaptor x 1, Micro SD Card (installed) x 1, USB Cable x 1, PC Software Disk x 1 & Carrying Bag x 1

Resistance Measurement

Range	Resolution	Measurement Current	Accuracy
4mΩ	1μΩ	40mA approx.	± (3% rdg ± 20 dgt)
40mΩ	10μΩ	40mA approx.	
400mΩ	100μΩ	4mA approx.	
4Ω	1mΩ	400μA approx.	
40Ω	10mΩ	40μA approx.	
400Ω	100mΩ	4μA approx.	
			± (0.8% rdg ± 6 dgt)

Measuring Current Frequency : 1KHz ± 30Hz

Voltage Measurement

Range	Resolution	Accuracy
6V	1mV	± (0.1% rdg ± 6 dgt)
60V	10mV	

Maximum Input Voltage : 60VDC maximum. No AC Voltage Input.


Temperature Measurement

Range	Resolution	Accuracy
-20°C to 60°C	0.1°C	± 1.0°C
-4°F to 140°F	0.1°F	± 1.8°F

DC Current Measurement

Range	Sensitivity	Resolution	Accuracy
600A	0.6A ~ 600.0A	0.1A	± (2.0% rdg ± 2 dgt)


Input Terminals

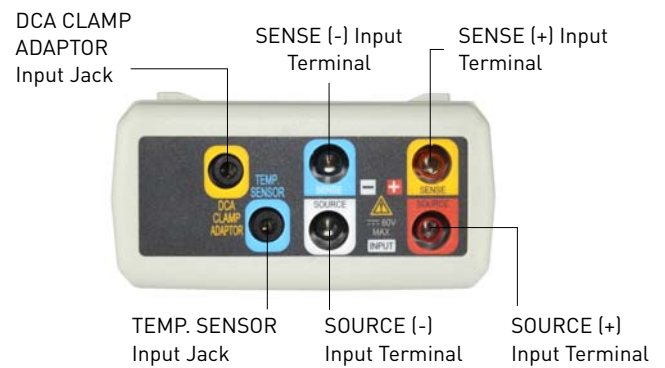


Usage



Zero Adjustment Using Pin Type Test Lead

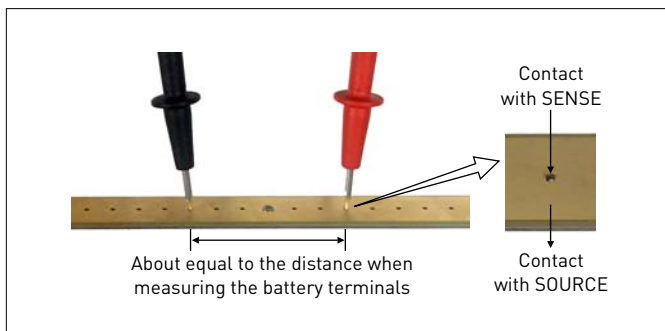

Zero Adjustment Using Clip Type Test Lead

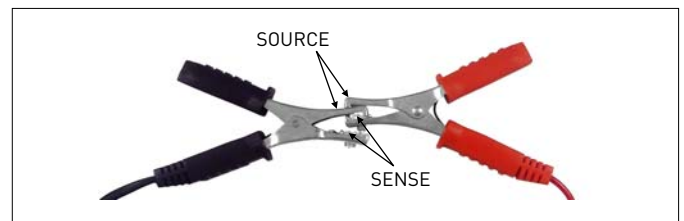

Product Kit



1st Floor Energy Building
Pandit Deendayal Petroleum University Campus
Gandhinagar, Gujarat - 382 007, INDIA
Phone : +91-79-2327 5361
Fax : +91-79-2327 5380
Email : information@germi.org
Website : www.germi.org

GERMI
GUJARAT ENERGY RESEARCH
AND MANAGEMENT INSTITUTE


ENERGY EDUCATION
ENERGY RESEARCH & DEVELOPMENT
ENERGY AWARENESS & PUBLICATION
ENERGY CONSULTANCY

Dr. Omkar Jani
Principal Research Scientist, Solar Energy Research Wing
GERMI Research, Innovation and Incubation Centre

GERMI/Solar/2016/554
4 January 2016

TO WHOMSOEVER IT MAY CONCERN

This is to certify that "SOLIR SYSTEM INILYZER MODEL: 9018 BT" , which is procured vide our Purchase Order number GERMI/SRWTRG/2015/021 dated 24.11.2015 from **M/s. Mecometers Private Limited**, Mahape, Navi Mumbai for Gujarat Energy Research and Management Institute, Gandhinagar, Gujarat, is for our internal use, training and research purpose.

Sincerely yours,

Omkar Jani

CRED A
CHHATTISGARH STATE RENEWABLE ENERGY DEVELOPMENT AGENCY
(Dept. of Energy, Govt. of Chhattisgarh)
2nd Floor, CSERC Building, Shanti Nagar, RAIPUR (C.G.)
Tel.: +91-771-4019230, 4019231, 4019227, 4019228. Fax: 0771-4205389
E-mail: info@creda.in Website: www.creda.in

CRED A

CRED A/EC/F-8D/SI/14624

Raipur, Date: 30 DEC 2015

TO WHOMSOEVER IT MAY CONCERN

It gives us immense pleasure & satisfaction to put on record our appreciation for M/s. Mecometers Pvt. Ltd., Navi Mumbai from whom we had purchased "Battery Capacity Tester" model No.-6363.

The performance of the instrument found to be satisfactory & excellent during the field inspection & testing of lead acid battery of the solar photovoltaic plant.

We also express our appreciation to the team of M/s. Mecometers Pvt. Ltd. for their excellent service support to CRED A.

I find the "Battery Capacity Tester" is very effective as well as essential electrical measuring instrument for testing & inspection of battery in solar photovoltaic plant.

Date: 30.12.2015
Place: Raipur

(Sanjeev Jaisi)
Chief Engineer, CRED A


CRED A - Energetic agency with ever lasting energy sources

Save Power. Save India. **Arzoo**
ENERGY
BY RUSAL GROUP

Date : 17.01.2023

To
Mr. Haren Shah - Senior Marketing Executive
M/s. MECO METERS PVT. LTD.
Mahape, Navi Mumbai.
Maharashtra

Dear Sir,

Hope all Fine at your side.

We are using MECO Power & Harmonics Analyzer Model PHA 5850-B since many years. The Analyzer is working to our satisfaction without any issue till date.

We have witness Testing with PHA5850 the monitoring, data logging, downloading data to prepare the reports are seems to be key features of this analyzer. Purpose of procuring this analyzer is served to our satisfaction.

We thanks and appreciate Mr. Haren Shah for extending timely technical support as and when require. Hope the support service will continue from MECO in future also.

Also to be noted that we are able to conduct the Energy Study /Audit with MECO PHA 5850 time to time as it is given with user friendly software.

Thanking you in advance
Yours faithfully

Arzoo Energy

c.c. For Information :

Mr. Haren Shah - Senior Ma

Arzoo Energy (I) Pvt. Ltd.
301, 3rd Floor, Parasmani Tower, 95 M.M.G.S. Marg, Near Dadar Station, Dadar (E), Mumbai - 400014
Tel: 022 - 2417 2663 / 9867711509 • Web: www.arzooenergy.in • Email: info@arzooenergy.in

ACCUTECH
Calibration & Instrument solution

• Calibration of Electro-Technical, Thermal, Mechanical & Flow Instruments / Equipment.
• Industrial Process Control Instruments Manufacture & Repairing.

Shop No. A-31, Sagar Complex, Nashik Phata, Opp. Kasarwadi Rly. Station, Kasarwadi, Pune-411034.
Contact : 91-9802962504.
E-mail : service.acc@gmail.com

APPRECIATION LETTER

16th-Dec-2015.

To Whomsoever It May Concern

We Have Purchased the Universal Calibrator Model No.90A From **Meco Instruments Pvt. Ltd.** Mahape Navi Mumbai. The performance of the Instrument during calibration from IDEMI Mumbai was found within claimed accuracy from Meco.

The Instrument is user friendly. We are thanking to Meco Instruments to Support us for growing our calibration Laboratories.

We hope to have similar support from your organization in future also. So it will strengthen our business relations.


For :-
Accutech Calibration & Instrument Solution.

Name: Sainath
Managing Partner



Solar Analyzers

- ✓ Solar Module Analyzer
- ✓ Solar Power Meter



+60
YEARS
ONE MISSION




Reliable




Long-Lasting



Affordable

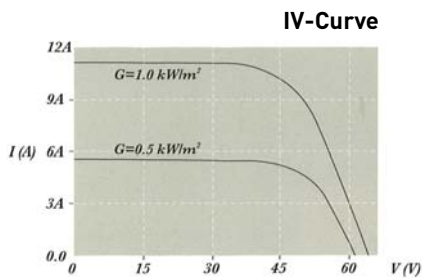

9009

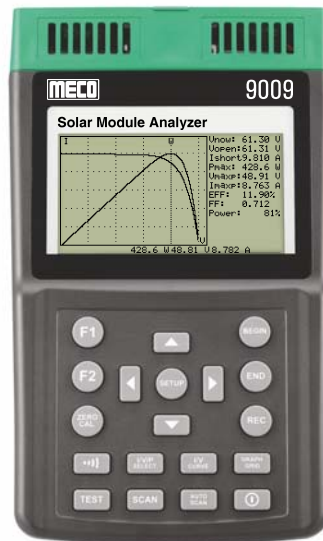

Solar Cell



Solar Panels




MECO Solar Module Analyzer Model 9009 is a portable analyzer used for testing, maintenance and finding efficiency of various parameters of solar panels and cells. Analyzer can be used to design Solar System to generate specific power. It can identify Solar Power System requirement, best angle of Solar Panel installation and Broken / Worn-out cells

Features

- I-V Curve Test for Solar Panel / Module / Cell
- Max. Solar Panel / Module / Cell Power (Pmax) search by Auto-Scan : 60V, 12A (500W Capability)
- Best Resolution : 1mV, 1mA
- Manual Single Point I-V Test
- Max. Voltage (Vmaxp) at Pmax
- Max. Current (Imaxp) at Pmax
- Voltage at Open Circuit (Vopen)
- Current at Short Circuit (Ishort)
- I-V Curve with Cursor to Display each Data Point
- Efficiency (%) Calculation of Solar Panel
- Solar Panel Area Setting : 0.001 m² ~ 9999 m²
- Standard Light Source Setting : 10 W/m² ~ 1000 W/m²
- Communicate with PC via USB Cable
- AC Adaptor and Rechargeable Lithium Battery
- Memory Size : 100 Records
- Sampling Time of Data Logging : 0 ~ 99 min.
- Large LCD with Backlight

IV-Curve

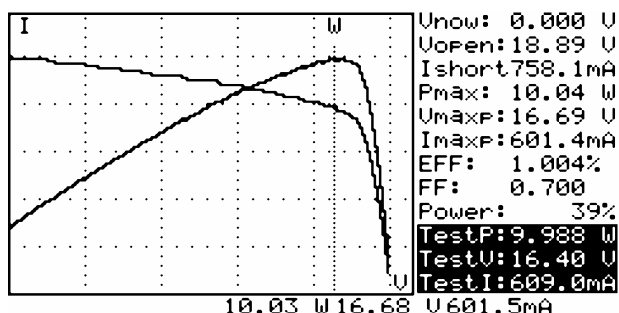

General Specifications

Battery Type	Rechargeable Lithium Battery, 3400mAh
Battery Life	400 times of linear scan from 60V to 0V and 0A to 12A.
Data Logging Memory Size	100 records
AC Adaptor	AC 110 ~ 240V Input, DC 15V / 1 ~ 3A Output
Standards	EN 61326 - 1:2013 EN 61010 - 1:2010 CAT I 60V Pollution Degree 2
Operation Environment	5°C ~ 50°C, <85% RH
Temperature Coefficient	0.1% of full scale / °C (<18°C or >28°C)
Storage Environment	-20°C ~ 60°C, <75% RH
Dimension	257 x 155 x 57mm (approx.)
Weight	1160gms Including Battery (approx.)
Accessories	User Manual x 1, AC Adaptor x 1, Optical USB Cable x 1, Rechargeable Lithium Battery (installed) x 1, Software CD x 1, Software Manual x 1, Kelvin Clips (12A max) x 1 Set, 4 Wire to 2 Wire Connector (10A Max and 12A for 1minute) x 1 set, Carrying Bag x 1

Electrical Specifications (23°C ± 5°C, Four-Wire Measurement
Maximum Power Limit is 500W)

DC Voltage Measurement

Range	Resolution	Accuracy
0 ~ 10V	0.001V	$\pm 1\% \pm (1\% \text{ of } V_{open} \pm 0.1V)$
10 ~ 60V	0.01V	$\pm 1\% \pm (1\% \text{ of } V_{open} \pm 0.1V)$

Vopen : Open Circuit Voltage of Solar Cell or Module

DC Current Measurement

Range	Resolution	Accuracy
0.01 ~ 10A	1mA	$\pm 1\% \pm (1\% \text{ of } I_{short} \pm 9mA)$
10 ~ 12A	10mA	$\pm 1\% \pm (1\% \text{ of } I_{short} \pm 0.09A)$

Ishort : Short Circuit Current of Solar Cell or Module


DC Current Simulation

Range	Resolution	Accuracy
0.01 ~ 10A	1mA	$\pm 1\% \pm 9mA$
10 ~ 12A	10mA	$\pm 1\% \pm 0.09A$

User Interface & Data Acquisition Software

Solar Module Analyzer is supplied with user friendly software for Data Storing and Analysis. Users can store Data (.CSV/.TAB) that can be read in MS EXCEL and Print Waveform / Graph via Printer

Software Window

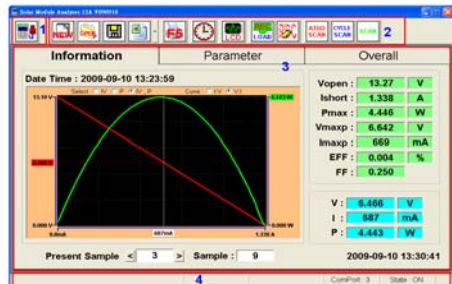

Cycle Scan

Cycle Time: Minute

Product Kit




Rear Panel Connections



Applications

- Quality Control at Production Line, Warehouse or Site of Installation
- Identify Requirements of Solar Power System
- Maintenance of Solar Panels
- Verify the Best Installation Angles of Solar Panels
- Research and Development

Print LCD

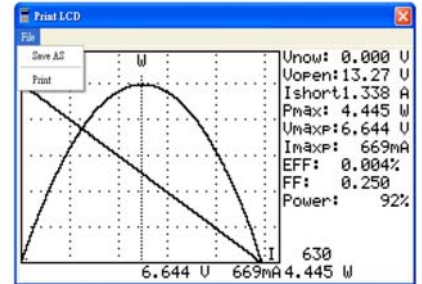

4 Wire Measurement



Solar Panel Connections





Applications

- Solar Power Plant
- Solar Radiation Measurements
- Solar Power Research for Location of the Solar Panels or Solar Water Heaters
- Physics and Optical Laboratories
- Meteorology
- Agriculture
- Windows Performance Calculate the Rate of Daylight Penetration

Features

- Solar Power Measurement with Orientation and Tilt Angle
- Measurement : Solar Power (illuminance), Orientation, Tilt Angle
- Solar Power Measurement Range : 2000 W/m² or 634 BTU / (ft².h).
- Easy Measurement for Rate of Daylight Penetration
- Auto Change for Measuring Range
- Auto Power off with Disable Function
- Instantaneous, Average, Min/Max Values, Data Hold
- 20 Points Memory, Low Battery Indicator
- Socket for Tripod Mounting
- Operation with 9V Battery
- Magnetic Mount
- Backlight LCD and 4 Digits Triple Display


Specifications

Sensor	High Sensitivity Silicon Photodiode
Spectral Response	400 ~ 1100 nm
Range	0 ~ 2000 W/m ² (0 ~ 634 BTU / ft ² .h)
Accuracy (at 23°C, 60% RH)	± 10W/m ² (± 3 BTU / ft ² .h) or ± 5% (whichever is greater)
Resolution	0.00 ~ 99.99 W / m ² : 0.01 W / m ² ,
	100.0 ~ 999.9 W / m ² : 0.1 W / m ² , 1000 ~ 2000 W / m ² : 1 W/m ²
	0.00 ~ 99.99 BTU / ft ² .h : 0.01 BTU / ft ² .h,
	100.0 ~ 634.0 BTU / ft ² .h : 0.1 BTU / ft ² .h
Angular Accuracy	Cosine Corrected < 7% (angle < 60°)
Tilt Angle Range	0 ~ 90°
Tilt Angle Accuracy (at 23°C, 60% RH)	± 1.2° (< 60°), Additional Temperature Induced Error ± 0.1° / °C from 23°C
Sample Time	Approx. 0.4 Second
Operation Temp. & Relative Humidity	0°C ~ 50°C (32°F ~ 122°F) Less than 80% RH
Store Temp. & Relative Humidity	-10°C ~ 60°C (14°F ~ 140°F) Less than 85% RH
Auto Power Off	Enable or Disable (Auto Power off after approx. 10 minutes)
Battery Life	Approx. 30 Hours for Continuous Use
Max / Min / Avg	Yes
Data Hold	Yes
Low Battery Indication	Yes
Backlight Function	Yes
Zero Adjustment	Yes
Over Range Indication	Yes ("--HI--")
Memory	Yes (20 Points Memory)
Compass	Yes
Solar Transmission Measurement	Yes
Tripod Socket	Yes
Weight	220gms Including Battery (approx.)
Dimensions	Main Instrument : 140 x 49 x 29 mm (approx.)
	Sensor Probe : 83 x 54 x 26 mm (approx.)
Accessories	9V Battery, Instruction Manual, Carrying Case



Environment Testing Instruments

- ✓ Infrared Thermometer (Body & Industrial)
- ✓ Humidity & Temperature Meter
- ✓ Air Flow Anemometer
- ✓ Digital Sound Level Meter
- ✓ Digital Lux Meter
- ✓ Laser Distance Meter
- ✓ Combustible Gas Leak Detector
- ✓ Tachometer
- ✓ Coating Thickness Gauge



+60^{YEARS}
ONE MISSION



Reliable



Long-Lasting



Affordable




■ Warranty One Year
 ■ Annual Re-calibration service available at extra cost "As per requirements of Legal Metrology Act."


BT-99

Green

 Normal Temperature
(Less than 37.5°C / 99.5°F)

Orange

 Marginally High Temperature
(Between 37.5°C to 38°C / 99.5°F to 100.4°F)

Red

 Very High Temperature
(Above 38°C / 100.4°F)

MBT-99

Green

 Normal Temperature
(Less than 37.3°C / 99.2°F)

Orange

 Marginally High Temperature
(Between 37.4°C to 37.9°C / 99.3°F to 100.3°F)

Red

 Very High Temperature
(Above 37.9°C / 100.3°F)

Features

- Handheld
- Precise non-contact measurements
- Measures temperature from distance
- Reduces risk of virus spread
- Body Temperature Measurements
- Surface Temperature Measurements
- Fast response
- 34 (BT-99) & 32 (MBT-99) Measuring Data can be stored
- Alarm for higher or lower body temperature (BT-99)
- LCD display with backlight
- Green, Orange and Red backlights to classify level of Body temperature
- °C / °F switchable
- Auto power off

Applications

- Home
- Office
- Hospitals
- Schools / Colleges
- Airports
- Restaurants / Hotels
- Supermarkets
- Gymnasiums
- Temples, Churches, Mosques
- Exhibitions
- Railway / Bus Stations
- Construction Sites



General Specifications	BT-99	MBT-99
Body Temperature Measuring Range	36°C ~ 42.9°C (97°F ~ 109°F)	32.0°C ~ 43.0°C (89.6°F ~ 109.4°F)
Body Temperature Measuring Accuracy	± 0.3°C (± 0.6°F)	± 0.3°C (± 0.6°F)
Surface Temperature Measuring Range	0 ~ 100°C (32 ~ 212°F)	0.0°C ~ 100.0°C (32.0°F ~ 212.0°F)
Surface Temperature Measuring Accuracy	± 1°C (± 1.8°F)	± 1°C (± 1.8°F)
Resolution	0.1°C / 0.1°F	0.1°C / 0.1°F
Response Time	0.5 Sec	5 Sec.
Measuring Distance	5 ~ 8 cm	5 ~ 8 cm
Auto Power Off	7 Sec (approx.)	10 Sec (approx.)
Operating Temperature	10°C ~ 40°C (50°F ~ 104°F)	10°C ~ 40°C (50°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)	-10°C ~ 60°C (14°F ~ 140°F)
Relative Humidity	10% ~ 90% RH operating, <80% RH storage	10% ~ 90% RH operating, <80% RH storage
Power	1.5V AA Battery x 2 pcs.	1.5V AAA Battery x 2 pcs.
Weight	140gms (including battery approx.)	140gms (including battery approx.)
Dimension	145 x 80 x 40mm (approx.)	165 x 95 x 45mm (approx.)
Accessories	Carrying Pouch, Instruction Manual, 1.5V AA Battery x 2 pcs.	Carrying Pouch, Instruction Manual, 1.5V AAA Battery x 2 pcs.

Note : Infrared Thermometer has advantage of measuring temperature from a distance and without contact with the object. Hence the reading may be approximate and used for surveillance / segregation only. For more accurate and confirmatory reading, please use Contact Type Thermometer.


IRT600TC

IRT1050P

Temperature Range	-50°C ~ 600°C	-50°C ~ 1050°C
	-58°F ~ 1112°F	-58°F ~ 1922°F
Accuracy	For <0°C (32°F) : ±3°C (±5.4°F) or ±3% For ≥0°C (32°F) : ±1.5°C (±2.7°F) or ±1.5%	±1.5°C
Distance Spot Ratio	12 : 1	50 : 1
Emissivity	0.1 ~ 1.0 (Adjustable)	0.10 ~ 1.00 (Adjustable)
Repeatability	±1% or ±1°C / ±1.8°F	±1% or ±0.5°C
Wavelength	-	630 ~ 670nm
Resolution	0.1°C / 0.1°F	0.1°C / 0.1°F
Spectral Response	8µm ~ 14µm	8µm ~ 14µm
Special Function		
°C / °F Selection	✓	✓
Laser Switch	✓	✓
Auto Power Off	✓	✓
Low Battery Indication	✓	✓
Backlight Display	✓	✓
MAX Function	-	✓
MIN Function	-	✓
DIF Function	-	✓
AVG Function	-	✓
Data Storage	-	✓
High / Low Temperature Alarm Settings Function	-	✓
LCD Size	24 x 26mm (Colour)	36 x 27mm
Packing Information		
Power	1.5V AAA x 2 Batteries	9V Battery
Product Color	Yellow + Black	Yellow + Black
Dimensions	150 x 82 x 45mm (approx.)	235 x 130 x 54mm (approx.)
Product Net Weight	122gms including battery (approx.)	278gms including battery (approx.)
Accessories	Drawstring Pouch x 1, Instruction Manual x 1, 1.5V AAA Battery (installed) x 2	Heavy Duty Carry Box x 1, Instruction Manual x 1, Tripod Stand x 1, 9V Battery (installed) x 1



920P

Humidity & Temperature Meter

Humidity Measuring	
Functions	°C / °F / RH Selection, MAX / MIN, Auto Power Off
Range	0% ~ 100% RH
Accuracy	± 3%RH (25°C , 20 ~ 80% RH) ± 3.5%RH (At Other Ranges)
Resolution	0.01%RH
Temperature Measuring	
Range	- 20°C ~ 80°C / - 4°F ~ 176°F
Accuracy	±0.5°C / ±0.9°F (25°C) ±0.8°C / ±1.5°F (At Other Ranges)
Resolution	0.01°C / 0.01°F
Power	9V Battery
Dimensions	173 x 56 x 39mm (approx.)
Weight	139gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)



961P

Air Flow Anemometer

Air Flow Measuring	
Functions	m / Sec, Ft / min, Knots, Km / h, MPH, CFM, MAX / MIN / HOLD, Auto Power Off
Range	1 ~ 25m/s
Accuracy	± (3% rdg ± 0.2m/s)
Resolution	0.01m/s
Temperature Measuring	
Range	0 ~ 50°C, 32 ~ 122°F
Accuracy	± 2°C / ± 4.0°F
Resolution	0.1°C / 0.1°F
Power	9V Battery
Dimensions	202 x 56 x 39mm (approx.)
Weight	155gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)



970P

Digital Sound Level Meter

Functions	MAX / MIN / HOLD, Auto Power Off
Range	35dB ~ 130dB (31.5Hz ~ 8 KHz)
Accuracy	± 1.5dB (under reference conditions)
Resolution	0.1dB
Selection	-
Power	9V Battery
Dimensions	172 x 56 x 39 mm (approx.)
Weight	144gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)



930P

Digital LUX Meter



930T

Digital LUX Meter with Flexible Sensor

Functions	MAX / MIN, Backlight, Auto Power Off with Disable Feature, Data Hold (930T)
Range	0.1 ~ 200,000 lux , 0.1 ~ 20,000 fc
Accuracy	±5% rdg+10 dgt (<10,000 lux/fc) 930P ±10% rdg+10 dgt (>10,000 lux/fc) 930P ±3% + 30 dgt (930T)
Resolution	0.1 lux or 0.1 fc
Selection	lux / fc
Power	9V Battery (930P) 1.5V AAA x 2 Batteries (930T)
Dimensions	190 x 56 x 39mm (approx.) 930P 157 x 54 x 34mm (approx.) 930T
Weight	135gms (930P), 70gms (930T) Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, Batteries (installed)




PTHM-90




PTHM-90C



THM-9



Model	PTHM-90	PTHM-90C	THM-9
Functions	Auto Measure Temperature & Humidity, Alarm °C / °F Selection, MAX / MIN, Calendar, Time, Date		°C / °F Selection, MAX / MIN, Clock & Calendar, Integral Hour Alarm
Backlight	-	✓	-
Display	Temperature, Humidity, Calendar and Time		Temperature, Humidity and Time
Temperature Range	-20°C ~ 90°C	-40°C ~ 90°C / -40°F ~ 194°F	-10°C ~ 50°C / 14°F ~ 122°F
Temperature Accuracy	±1.0°C	±1.0°C / 1.8°F	±2.0°C / 3.6°F
Temperature Resolution	0.1°C	0.6°C / 1.0°F	0.1°C / 0.1°F
Humidity Range	10% ~ 95%	10% ~ 99%	10% RH ~ 99% RH
Humidity Accuracy	±5%		±10% RH
Humidity Resolution	1%		1% RH
Power	3V (1 pc CR2032)		One 1.5V "AAA" Battery
Dimensions	63 x 29 x 13.5mm	80 x 40 x 15mm with holster	103 x 93 x 24mm
Weight (approx.)	23gms Including Battery	36gms Including Battery	106gms Including Battery
Accessories	Manual, Velcro, Box, Compass (PTHM-90C), Battery Installed		Battery : 1.5V AAA x 1, Blister & Manual



DTHM-90

Desk Temp. & RH Meter with Clock & Calendar

Functions	Auto Measure Temperature and Humidity, MAX/MIN, Calendar, Alarm, Time & Date, °C/°F Selection
Display	Temperature, Humidity, Calendar, Date and Time
Temperature Range	-20°C ~ 90°C
Temperature Accuracy	±1.0°C
Temperature Resolution	0.1°C
Humidity Range	10% ~ 95%
Humidity Accuracy	±3% (50% ~ 80%) ±5% (10% ~ 50%, 80% ~ 95%)
Humidity Resolution	1%
Power	3V (1 pc CR2032)
Dimensions	91 x 67 x 11mm (approx.)
Weight	60gms (approx.) Including Battery
Accessories	Manual, PP Bag, Battery Installed White Box



MTP-9

Features

°C/°F, MAX/ MIN, Hold
Water Resistance
APO & Low Power Consumption
Suitable for Air & Liquid
Stainless Steel Sensor Probe

Application

Food Processing
Refrigeration
Brewing
Pharmaceutical

Long Probe Handy Multipurpose Thermometer

Functions	°C / °F Selection, MAX/ MIN, Data Hold, Auto Power Off
Temperature Range	-50°C ~ 300°C/ -58°F ~ 572°F
Accuracy	±1°C(-20°C ~ 80°C) and ±5°C(Other)
Resolution	0.1°C / 0.1°F
Power Supply	1.5V DC Ah13/ LR44 Button Cell x 1
Dimensions	230 x 20.5 x 20.5mm (approx.)
Product Net Weight	35gms (approx.) (With Battery and Carrying Tube)
Accessories	Carrying Tube x 1, Wristlet x 1, Instruction Manual x 1, 1.5V DC Button Cell(installed) x 1



920K



Humidity & Temperature Meter

Specifications	Range	Resolution	Accuracy
Ambient Temperature / Wet Bulb Temperature / Dew-Point Temperature	-20 ~ 0°C	0.1°C	±1.0°C (0 ~ 45°C)
	0 ~ 60°C	0.01°C	±1.5°C (-20 ~ 0°C, 45 ~ 60°C)
	-4 ~ 0°F	0.1°F	±2.0°F (32 ~ 113°F)
	0 ~ 99.99°F	0.01°F	±2.7°F (-4 ~ 32°F, 113 ~ 140°F)
	100 ~ 140°F	0.1°F	
Humidity	0 ~ 100% RH	0.1%	±3.0% RH (20 ~ 80%) ±4.0% RH (0 ~ 20%, 80 ~ 100%)
Auto Ranging	Yes		
Refresh Rate	3 Times / Second		
Unit	°C / °F Selectable		
Comfort Indicator	Yes		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	90gms Including Battery (approx.)		
Dimension	155 x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		

930K



Lux Meter

Specifications	Range	Resolution	Accuracy
Lux / Fc	0 ~ 20.00	0.01	±(3% + 2)
	20.00 ~ 200.0	0.1	
	200.0 ~ 2000	1.0	
	2.000K ~ 20.00K	0.01K	
Lux	20.00K ~ 200.0K	0.1K	
Auto Ranging	Yes		
Spectral Measurement Range	320 ~ 730nm		
Response Time	3 Times / Second		
Min / Max	Yes		
Unit	Lux / Fc		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	110gms Including Battery (approx.)		
Dimension	155 x 40 x 40mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		



961K

Anemometer

Specifications	Range	Resolution	Accuracy
m/s (meter per second)	0.80 ~ 30.00 m/s	0.01 m/s	±(2.0% + 50)
	30.00 ~ 40.00 m/s	0.01 m/s	Reference
Km/h (kilometer per hour)	2.88 ~ 108.0 km/h	0.01 km/h	±(2.0% + 50)
	108.0 ~ 144.0 km/h	0.1 km/h	Reference
ft/s (feet per second)	2.62 ~ 98.50 ft/s	0.01 ft/s	±(2.0% + 50)
	98.50 ~ 131.2 ft/s	0.01 ft/s	Reference
knots (nautical miles per hour)	1.6 ~ 58.30 knots	0.01 knots	±(2.0% + 50)
	58.30 ~ 77.70 knots	0.01 knots	Reference
mile/h (mile per hour)	1.80 ~ 67.20 mil/h	0.01 mil/h	±(2.0% + 50)
	67.20 ~ 90.00 mil/h	0.01 mil/h	Reference
ft/m (feet per minute)	157.5 ~ 5900 ft/m	1 ft/m	±(2.0% + 50)
	5900 ~ 7874 ft/m	1 ft/m	Reference
Auto Ranging	Yes		
Refresh Rate	3 Times / Second		
Min/Max/Avg	Yes		
Wind Scale	Level 0 ~ 12		
Unit	m/s, km/h, ft/s, knots, mile/h, ft/m, CMM, CFM, CMS		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	100gms Including Battery (approx.)		
Dimension	176 x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		



970K

Sound Meter

Specifications	Range	Resolution	Accuracy
dB	30dB ~ 130dB	0.1dB	±1.5dB (In the Reference Sound Pressure Level 94dB 1KHz)
Sampling Rate	Fast : 125ms, Slow : 1000ms		
Frequency Range	31.5Hz ~ 8KHz		
Noise	A weighting		
Min /Max	Yes		
Unit	dB		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	120gms Including Battery (approx.)		
Dimension	175 x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		



980K

981K

Tachometer (Contact Type and Non-Contact Type)

Specifications	Range	Resolution	Accuracy
RPM	50.00 ~ 99.99	0.01	±(0.03% + 2)
	100.00 ~ 999.9	0.1	
	10000 ~ 19999	1.0	
Auto Ranging	Yes		
Working Principle	Contact Measurement (980K)		
	Non- Contact Measurement (981K)		
Measuring Distance	50 ~ 250mm (981K)		
Refresh Rate	3 Times / Second		
Min / Max	Yes		
Unit	m/min, m/sec, ft/min, ft/sec, in/min		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	100gms Including Battery (approx.)		
Dimension	980K : 150 x 40 x 27mm (approx.),		
	981K : 135 x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		

Coating Thickness Gauge

Specifications	Range	Resolution	Accuracy
Measuring	0 ~ 99.9 µm	0.1 µm	± (3%+1) µm
	100 ~ 1250 µm	1.0 µm	± (3%+1) µm
	0 ~ 4.99 mil	0.01 mil	± (3%+0.04) mil
	5.0 ~ 49.2 mil	1.0 mil	± (3%+0.04) mil
Auto Ranging	Yes		
Display Type	1.44 inches TFT LCD		
Metal Type	Ferrous / Non-Ferrous		
Measurement Method	Single / Continuous		
Min/Max/Avg	Yes		
Unit	µm / mil		
Data Hold	Yes		
Backlight	Yes		
Audio Alarm	Yes		
Data Storage	100 Groups		
Rotatable Screen	Manual Control by setting [0° / 90° / 180° / 270°]		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	108gms Including Battery (approx.)		
Dimension	140 x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed), Calibration Kit		



990K



940K



Brake Fluid Tester

Specifications	Range	Resolution
Brake Oil Type	DOT3 / DOT4 / DOT5.1	
Brake Oil Status Test	GOOD	Water Content < 1%
	CAUTION	Water Content < 3%
	STOP	Water Content > 3%
Auto Ranging	Yes	
Data Hold	Yes	
Backlight	Yes	
Work light	Yes	
Magnet Function	Yes	
Warning Tone	Yes	
Auto Power Off	Yes	
Low Battery Indicator	Yes	
Power	1.5V AAA x 2 Batteries	
Operating Altitude	< 2000m	
Operating Temperature	-10°C ~ +50°C	
Storage Temperature	-20°C ~ +60°C	
Operating Humidity	< 80% RH	
Weight	250gms Including Battery (approx.)	
Dimension	350 (with probe) x 40 x 27mm (approx.)	
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)	

950K



Combustible Gas Leak Detector

Specifications	Range	Resolution	Accuracy
Combustible Gas	0 ~ 999.9 ppm	0.1 ppm	≤10% FS (Methane)
	1000 ~ 9999 ppm	1.0 ppm	
	0 ~ 20.00% LEL	0.01% LEL	
Auto Ranging	Yes		
Sensitivity	≤50 ppm (Methane)		
Response Time	≤2 Seconds		
Warm-up time	30 Sec (approx.)		
Refresh Rate	400 ms		
Flexible Probe	16 inch		
Min / Max / Avg	Yes		
Unit	ppm, %LEL		
Data Hold	Yes		
Backlight	Yes		
Auto Power Off	Yes		
Low Battery Indicator	Yes		
Power	1.5V AAA x 2 Batteries		
Operating Altitude	< 2000m		
Operating Temperature	-10°C ~ +50°C		
Storage Temperature	-20°C ~ +60°C		
Operating Humidity	< 80% RH		
Weight	300gms Including Battery (approx.)		
Dimension	420 (with probe) x 40 x 27mm (approx.)		
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (Installed)		




Function

- Display Illumination [Backlight]
- Min / Max, Measurement / Continuous Measurement
- Addition / Subtraction
- Pythagoras Measurement
- Area / Volume Calculation
- Wall Area Measurement
- Triangular Area Measurement
- Stake out Measurement
- Front / Back Benchmark Measuring Datum Selection

Display Screen

- Laser Emission Indicator
- Reference Edge [Front]
- Reference Edge [Behind]
- Stored Data Indicator
- Stake out Function
- MAX / MIN Measurement
- Indirect measuring / Pythagoras Theorem Measurement
- Triangular Area
- Timer
- Silence
- Area / Volume Function.
- Battery Indicator
- The third Display Line
- The Second Display Line
- The First Display Line
- Main Display Line (Result)

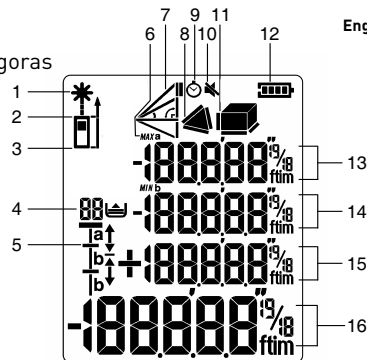

LDM60+



LDM100+



Applications



Specifications

Model	LDM60+	LDM100+
Range	0.05 ~ 60m	0.05 ~ 100m
Measuring Accuracy upto 60 / 100m [in the room]	±1.5mm	±1.5mm
Measurement Time	0.25 ~ 1s	0.25 ~ 1s
Units	m / in / ft / ft'in"	m / in / ft / ft'in"
Smallest Unit Displayed	1mm	1mm
Laser Class	Class II	Class II
Laser Type	630 ~ 670, <1mW	630 ~ 670, <1mW
Auto Laser Switch Off	After 30 second	After 30 second
Automatic Switch Off	After 3 Minutes of Inactivity	After 3 Minutes of Inactivity
Timer (Self-Triggering)	✓	✓
Historical Storage	99	99
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Operating Temperature	-10°C ~ 50°C	-10°C ~ 50°C
Power	1.5V AAA x 2 Batteries	1.5V AAA x 2 Batteries
Battery Life	Up to 5000 Measurements	Up to 5000 Measurements
Rating [Dust Proof & Splash Proof]	IP40	IP40
Dimensions	110 x 44 x 26mm [approx.]	110 x 44 x 26mm [approx.]
Weight	70gms [Including Batteries] approx.	70gms [Including Batteries] approx.
Accessories	1.5V AAA X 2 Batteries [Installed], Drawstring Pouch, Inst. Manual, Wristlet	1.5V AAA X 2 Batteries [Installed], Drawstring Pouch, Inst. Manual, Wristlet



Power & Harmonics Analyzer & Clamp-On Power Meter

- ✓ Power & Harmonics Analyzer
- ✓ AC Clamp-On Power & Harmonics Tester
- ✓ Clamp-On TRMS Power Meter
- ✓ 3 ϕ /1 ϕ Clamp-On TRMS Power Meter for AC/DC Power Measurement



+60 YEARS
ONE MISSION



Reliable



Long-Lasting



Affordable



PHA 5850



Under BEE's PAT Scheme (Perform, Achieves & Trade) it is mandated to compulsorily improve their Energy Efficiency by adopting all the available measures including replacement of their old Equipments with New and Energy Efficient Equipments

Versatile Handy instrument using micro controller technology and easy to use software program for recording and downloading.

Useful for time to time monitoring of Power Parameters, Energy and Presence of Harmonics at several Location / Machines.

Cost Effective & Efficient Tool for Energy Auditor, Maintenance Persons, Service Providers, Site / Plant Engineers.

MECO Power and Harmonics Analyser Model PHA-5850 can Analyze, Measure, Monitor & Data Log values of Power Quality & Consumption (Energy). Capable of analyzing IT standby power consumption to the maximum demand of factory. It comes with a user friendly application software that increases the utility & performance of this instrument. The analyzer is ideal for an any Engineer/ Inspector for carrying out Periodic Visits, Maintanance of Plant, Vigilance checks, Surveys and Energy Audits for checking at Industrial and Consumers end.

Features :

- Analysis of 3P4W, 3P3W, 1P2W, 1P3W Systems
- Display of 35 Parameters in one screen (3P4W)
- Programmable CT (1 to 600) and PT (1 to 3000) Ratios
- Graphic Phasor Diagram
- RMS, PEAK Value & Crest Factor
- True RMS value, Active Power, Apparent & Reactive Power (KVA, KVAR)
- Power Factor, Phase Angle (Φ) & Energy (WH, KWH, KVARH, PFH)
- Average / Maximum Demand (KW, MW, KVA, MVA) with Programmable Period
- Analysis of Total Harmonic Distortion (THD-F)

- Display of 50 Harmonics in one Screen with Wave form with Peak value (1024 Sample / Period)
- Capture 28 Transient Events with Programmable Threshold (%) (DIP, SWELL & OUTAGE)
- Built in timer & Calendar for Data Logging
- Facility to retrieve Power Data & Harmonics on Meter Screen
- 512K Memory with Programmable Interval (2 to 3000 seconds, 17000 records for 3P4W System)
- Optical Isolated RS-232C~USB Interface
- Software for easy download of Recorded Data & Transient events
- Calculated Unbalanced Current through Neutral line

General Specification : PHA5850

Power	Eight x 1.5V "AA" Batteries	Overload Indication	OL
External DC Input	Power supply adapter 12 Volts. DC	Operating Condition	-10°C to 50°C \leq 85% RH
Display	Dot Matrix LCD (240x128) with backlight	Storage Condition	-20°C to 60°C \leq 75% RH
LCD Update Rate	1 time / second	Dimensions	257 x 155 x 57 mm
Power Consumption	140mA (approx.)	Weight	1160 g (Batteries included)
No. Of Samples	1024 samples / period	Accessories	Voltage Test Leads x 4 (3 meter long)
Data Logging Files	85		Alligator Clips (Voltage) x 4 (R.Y.B.N.)
Max. File Capacity	17474 records (3P4W, 3P3W)		Carrying Bag x1
	26210 records (1P3W)		Batteries 1.5V x8
	52420 records (1P2W)		External DC Adaptor x1
	4096 records (50 Harmonics / record)		Software CD x1
Sampling Time	2 to 3000 seconds for data logging		Users Manual x1
Low battery Indication	B		Software Manual x1
			Optical USB Cable x1
			Current Clamps x 3 (Any One CT Set)

Specifications : (23°C ± 5°C)

AC Current

(50Hz or 60Hz, Auto Range, True RMS, Crest Factor <4, CT=1)

Model : PHA-5850A (100A) (Overload Protection AC 200A)

Range	Resolution	Accuracy of Readings
0.04 - 1A	0.1mA / 1mA	± 0.5% ± 0.05A
0.4 - 10A	0.001A / 0.01A	± 0.5% ± 0.05A
4 - 100A	0.01A / 0.1A	± 1.0% ± 0.5A

Model : PHA-5850B (1000A) (Overload Protection AC 2000A)

Range	Resolution	Accuracy of Readings
10.00A	0.001A / 0.01A	-
5A - 100.0A	0.01A / 0.1A	± 0.5% ± 0.5A
50A - 1000.0A	0.1A / 1A	± 0.5% ± 5A

Model : PHA-5850C (3000A) (Overload Protection AC 3000A)

Range	Resolution	Accuracy of Readings
10.0 - 300.0A	0.01A / 0.1A	± 1% of range
300.0 - 3000A	0.1A / 1A	

Model : PHA-5850D (1200A) (Overload Protection AC 1200A)

Range	Resolution	Accuracy of Readings
6.0 - 120.0A	0.01A / 0.1A	± 1% of range
120.0 - 1200A	0.1A / 1A	

Harmonic of AC Voltage in Percentage

Range	Resolution	Accuracy
1 - 20th	0.1%	± 2%
21 - 49th		± 4% of reading ± 2.0%
50 - 99th		± 6% of reading ± 2.0%

Harmonic of AC Current in Percentage

Model : PHA-5850A (100A)

Range	Resolution	Accuracy
1 - 10th	0.1%	± 0.2% of reading ± 1%
11 - 20th		± 2% of reading ± 1%
21 - 50th (A range)		± 5% of reading ± 1%
21 - 50th (mA range)		± 10% of reading ± 1%
51 - 99th		± 35% of reading ± 1%

Model : PHA-5850B (1000A)

Range	Resolution	Accuracy
1 - 20th	0.1%	±2%
21 - 49th		± 4% of reading ± 2.0%
50 - 99th		± 6% of reading ± 2.0%

Model : PHA-5850C (3000A) & PHA-5850D (1200A)

Range	Resolution	Accuracy
1 - 20th	0.1%	±2 %
21 - 50th		± 6%
51 - 99th		± 10%

AC Watt

(50Hz or 60Hz, PF 0.5~1, CT=1, continuous waveform)

Model : PHA-5850A (100A)

Range (0 to 100A)	Resolution	Accuracy of Readings
5.0 - 999.9W	0.1W	± 1% ± 0.8W
1.000 - 9.999KW	0.001KW	± 1% ± 8W
10.00 - 99.99KW	0.01KW	± 1% ± 80W
100.0 - 999.9KW	0.1KW	± 1% ± 0.8KW
1000 - 9999KW	1KW	± 1% ± 8KW

Model : PHA-5850B (1000A)

Range (0 to 1000A)	Resolution	Accuracy of Readings
5.0 - 999.9W	0.1W	± 1% ± 0.8W
1.000 - 9.999KW	0.001KW	± 1% ± 8W
10.00 - 99.99KW	0.01KW	± 1% ± 80W
100.0 - 999.9KW	0.1KW	± 1% ± 0.8KW
1000 - 9999KW	1KW	± 1% ± 8KW
0.000 - 9.999MW	0.001MW	± 1% ± 80KW

Model : PHA-5850C (3000A)

Model : PHA-5850D (1200A)

Range (0 to 3000A or 0 to 1200A)	Resolution	Accuracy of Readings	
		>20V & >30A	<20V or <30A
10.0 - 999.9W	0.1W	± 1% of range	± 2% of range
1.000 - 9.999KW	0.001KW		
10.00 - 99.99KW	0.01KW		
100.0 - 999.9KW	0.1KW		
1000 - 9999KW	1KW		

AC Voltage

(50Hz or 60Hz, Auto Range, True RMS, Crest Factor <4, Input Impedance 10MΩ, VT (PT) = 1, Overload Protection AC 800V)

Range	Resolution	Accuracy of Readings
20.0V - 500.0V (Phase to Neutral)	0.1V	± 0.5% ± 5dgts
20.0V - 600.0V (Phase to Phase)		

Power Factor (PF)

Model : PHA-5850A (100A) & PHA-5850B (1000A)

Range	Resolution	Accuracy
0.00 - 1.00	0.01	± 0.04

Model : PHA-5850C (3000A) & PHA-5850D (1200A)

Range	Resolution	Accuracy	
		>20V & >30A	<20V or <30A
0.000 - 1.000	0.001	± 0.04	± 0.1



PHT 4545

Power Analysis

- W, KW, HP, VA, KVA, VAR, KVAR ■ PF, Phase Angle (Φ) ■ Energy (WH, KWH)
- Balanced 3Phase Power Quality ■ Balanced 3Phase Sequence ■ Programmable CT Ratio (1 to 250) ■ Dual Displays (W + PF, VA + KVAR...) ■ Active Power in HP
- Resistance and Continuity with Beeper

Harmonic Analysis

- True RMS value (V and A) at 0.5% basic accuracy ■ 1500A AC ■ Harmonic Analysis (V and A) to the 99th Order in % and in magnitude ■ Better Understanding of High Frequency Harmonic Analysis (up to 5/6 KHz) ■ Non-interrupted Harmonic Analysis
- Analysis of Total Harmonic Distortion (%THD-F) ■ Analysis of Crest Factor (C.F.)
- Fast Peak Function (33μs for 60Hz and 39μs for 50Hz) ■ Max, Min and Data Hold Function

General Specifications

- Jaw Opening** : Cable Dia 55mm (approx.), 64 x 24mm (Bus Bar)
- Power** : Two 1.5V "AA" Battery
- Display** : 4 + 4 Digits LCD
- Auto-Power-Off** : 30 minutes
- LCD Update Rate** : 2 times / sec.
- Operating Temperature** : -10°C to 50°C
- Storage Temperature** : -20°C to 60°C
- Option** : Alligator Clips
- Power Consumption** : 10mA (approx.)
- No. of Samples / Period** : 512 (V & A), 256 (W)
- Operating Humidity** : < 85% Relative
- Storage Humidity** : < 75% Relative
- Weight** : 650gms Including Battery (approx.)
- Dimension** : 271 x 112 x 46mm (approx.)
- Accessories** : Test Leads, Carry Bag, Users Manual, Batteries (Installed)

Specifications (23°C ± 5°C)

Harmonics of AC Current in % & Magnitude [1~99th order]					
Range	Resolution in %	Accuracy in %	Resolution in Magnitude	Accuracy in Magnitude	
1 ~ 20th	0.1%	±2%	0.1A	± 2% of reading ± 0.4A	
21 ~ 49th		4% of reading ± 2.0%		± 4% of reading ± 0.4A	
50 ~ 99th		6% of reading ± 2.0%		± 6% of reading ± 0.4A	
Harmonics of AC Voltage in % & Magnitude [1~99th order]					
Range	Resolution in %	Accuracy in %	Resolution in Magnitude	Accuracy in Magnitude	
1 ~ 20th	0.1%	±2%	0.1V	± 2% of reading ± 0.5V	
21 ~ 49th		4% of reading ± 2.0%		± 4% of reading ± 0.5V	
50 ~ 99th		6% of reading ± 2.0%		± 6% of reading ± 0.5V	
Crest Factor[C.F., Accuracy of Readings]					
Range		Resolution	Accuracy		
1.00 ~ 99.99		0.01	± 5% ± 30 dgt		
AC Watt (50 or 60Hz)			Power Factor & Phase Angle		
Range	Resolution	Accuracy	Range	Resolution	Accuracy
10.0 ~ 999.9W	0.1W	± 2% ± 20 dgt (>20V & >20A)	0.000 ~ 1.000	0.001	± 0.04
1.000 ~ 9.999KW	0.001KW		-180°to180° & 0°to360°	0.1°	± 2°
10.00 ~ 99.99KW	0.01KW				
100.0 ~ 999.9KW	0.1KW	± 2% ± 40 dgt (<20V or <20A)			
1000 ~ 9999KW	1KW				
AC Current (50 or 60Hz, True RMS)			Total Harmonic Distortion (THD-F, 1 to 50th order)		
Range	Resolution	Accuracy	Range	Resolution	Accuracy
10.0 ~ 1500.0A	0.1A	± 2% ± 5 dgts	0.0 ~ 20%	0.1%	± 2%
			20.1 ~ 100%		± 6% of reading ± 1%
			100.1 ~ 999.9%		±10% of reading ± 1%
AC Voltage (50 or 60Hz, True RMS)			Resistance (Ω) and Continuity (Beep if less than 50Ω)		
Range	Resolution	Accuracy	Range	Resolution	Accuracy
10.0 ~ 600.0V	0.1V	± 0.5% ± 5 dqts	* 7.0 ~ 999.9Ω	0.1Ω	± 5Ω
			1000 ~ 1200Ω	1Ω	

* If reading is less than 7Ω, it is displayed as 0Ω



3510PHW-AUTO

Features

- Check 3 ϕ Phase Sequence
- 4 Digit LCD, 9999 Count, Autoranging
- Data Hold, Auto Power Off
- Dual Display KW+HP, KW+PF, KW+KVAR, KVA+ ϕ , V+A, A+Hz, V+Hz
- Cable of Diameter upto 43mm / Busbar upto 65mm x 16mm

Applications

- 1 ϕ & 3 ϕ (3 ϕ 3w / 3 ϕ 4w) Power Analyzer
- Ideal for Electrical Audit of Heating, Ventilation & Aircon Systems (HVAC)
- Check Current drawn in Motors and Compressors
- Test Run / Start Capacitors
- Check for Energized Circuits & Balance Loads
- Capture Motor In-Rush Current Readings
- Determine Peak Power Demand Periods
- Analyze Temperature Data with the Aid of the Time Stamp
- Resistance upto 100M Ω
- Use MAX / MIN / REC in Temperature Mode to Assess Efficiency
- Evaluate Electrical Contacts
- Verify the Stability of Voltage
- Check Motor Run / Start Capacitor Values
- To Identify Low Voltage Control Signal
- To Identify Power Sources

1 ϕ /3 ϕ TRUE Power (KW) : (PF lag 1.000~0.000~lead 1.000 or 00.00°~360.0°) (1 hp=0.7457KW)			
Range	Resolution	Accuracy \pm (%rdg+dgts)	Overload Protection
99.99KW	0.01KW	\pm (5% + 30)	600VAC/ 1000AAC
600.0KW	0.1KW	(50, 60Hz)	

1 ϕ /3 ϕ HP (1HP=745.7W) : (PF lag 1.000~0.000~lead 1.000 or 00.00°~360.0°)			
Range	Resolution	Accuracy \pm (%rdg+dgts)	Overload Protection
99.99HP	0.01 HP	\pm (5% + 30)	600VAC/ 1000AAC
800.0HP	0.1 HP	(50, 60Hz)	

1 ϕ /3 ϕ Apparent Power (KVA)			
Range	Resolution	Accuracy \pm (%rdg+dgts)	Overload Protection
99.99KVA	0.01 KVA	\pm (2.5% + 30)	600VAC/ 1000AAC
600.0KVA	0.1 KVA		

1 ϕ /3 ϕ Reactive Power (KVAR) : (PF lag 1.000~0.000~lead 1.000 or 00.00°~360.0°)			
Range	Resolution	Accuracy \pm (%rdg+dgts)	Overload Protection
99.99KVAR	0.01KVAR	\pm (5% + 50dgts)	600V AC/1000AAC
600.0KVAR	0.1KVAR	(50, 60Hz)	

3 ϕ Phase Sequence Indication		
Range	Frequency Response	Overload Protection
80V to 480V	(50Hz / 60Hz)	600V

ACA Inrush Current				
Range	Resolution	Sensitivity	Measurement Time	Overload Protection
99.99A	0.01A	>5A	100ms	1000A AC
999.9A	0.1A	>50A		

1 ϕ /3 ϕ PF & Phase Angle (50Hz, 60Hz)				
Range	Resolution	Accuracy	Sensitivity	
00.00°~99.99°	0.01°	\pm 6.0°	ACV>100V, ACA>10A	
100.0°~360.0°	0.1°			
lag 1.000~0.000~lead 1.000	0.001			

Frequency				
Range	Resolution	Accuracy \pm (%rdg+dgts)	Sensitivity	
40.00Hz~999.9Hz	0.01Hz/0.1Hz	\pm (0.5% + 2)	ACV>1.2V, ACA>6A	

AC Current (50Hz to 400Hz) : TRMS				
Range	Resolution	Accuracy \pm (%rdg+dgts)	Sensitivity	Overload Protection
99.99A	0.01A	\pm (2% + 30) (50,60Hz)	0.10A	1000A
999.9A	0.1A	\pm (4% + 30) (40-400Hz)	1.0A	

μ A : DC + AC TRMS (Burden Voltage : 5mV/ μ A) (50Hz to 400Hz)				
Range	Resolution	Accuracy \pm (%rdg+dgts)	Sensitivity	Overload Protection
99.99 μ A	0.01 μ A	\pm (1% + 30)	0.20 μ A	500V DC or AC rms for 1 min.
999.9 μ A	0.1 μ A		2.0 μ A	

AC Voltage (50Hz to 400Hz) : TRMS				
Range	Resolution	Accuracy ±(%rdg+dgts)	Sensitivity	Overload Protection
999.9mV	0.1mV	±(1% + 30) (50, 60Hz)	2.0mV	600V
9.999V	0.001V		0.020V	
99.99V	0.01V	±(2% + 30)	0.20V	
600.0V	0.1V	(40-400Hz)	2V	
Input Impedance : 3MΩ				

DC Voltage				
Range	Resolution	Accuracy $\pm(\%rdg+dgts)$	Sensitivity	Overload Protection
999.9mV	0.1mV	$\pm(1\% + 30)$	2.0mV	600V
9.999V	0.001V		0.020V	
99.99V	0.01V		0.20V	
600.0V	0.1V		2V	

Input Impedance : 3M Ω

Resistance (Continuity < 40 Ω on the 999.9 Ω range)			
Range	Resolution	Accuracy $\pm(\%rdg+dgts)$	Overload Protection
999.9 Ω	0.1 Ω	$\pm(1\% + 10)$	500V DC or AC rms for 1 min.
9.999K Ω	0.001K Ω		
99.99K Ω	0.01K Ω		
999.9K Ω	0.1K Ω		


M Ω (Auto Ranging)			
Range	Resolution	Accuracy $\pm(\%rdg+dgts)$	Overload Protection
9.999M Ω	0.001M Ω	$\pm(5\% + 10)$	500V DC or AC rms for 1 min.
99.99M Ω	0.01M Ω		

Capacitance			
Range	Resolution	Accuracy ±(%rdg+dgts)	Overload Protection
10.000μF	0.001μF	±(3.0% + 5)	500V DC or AC rms for 1 min.
100.00μF	0.01μF	±(1.5% + 5)	
1000.0μF	0.1μF		
7000μF	1μF	±(2.5% + 15)	

Diode (Continuity < 40mV)			
Range	Resolution	Accuracy $\pm(\%rdg+dgts)$	Overload Protection
2.000V	0.001V	$\pm(2\% + 1)$	500V DC or AC rms for 1 min.

Temperature (K-Type Thermocouple)			
Range	Resolution	Accuracy $\pm(\%rdg+dgts)$	Overload Protection
-50°C to 900°C	0.1°C	$\pm(1.2\% + 4^\circ\text{C})$	30VAC or 60VDC
-58°F to 1000°F	0.1°F	$\pm(1.2\% + 6^\circ\text{F})$	


General Specifications

Numerical Dual Display : 4 Digit 9999 Count LCD
Low Battery Indication :  is displayed
Power : 9V Battery x 1
Sampling Rate : 2.5 times/sec. (Digital Display)
 1 times/6 sec. (on KW, KVA)
Operating Temperature and Humidity : 0°C to 50°C (32°F to 122°F)
 RH < 80% non-condensing
Storage Temperature and Humidity : -10°C to 60°C (14°F to 140°F)
 RH < 70% non-condensing
Dimensions : 247 x 90 x 40mm

Weight : 425gms Including Battery (approx.)
Jaw Opening : Cable Dia 43mm (max.)
 Bus Bar 16mm x 65mm
Accessories : Carrying Case, Battery (installed),
 Test Leads Pair, K Type Thermocouple (Upto 260°C) (Optional), Instruction Manual
Auto Power off Time : Approx. 30 minutes
Temperature Coefficient : 0.1 x (specified accuracy) / °C
 (<18 or >28°C, <64 or >82°F)


Usage

1 ϕ 2W System

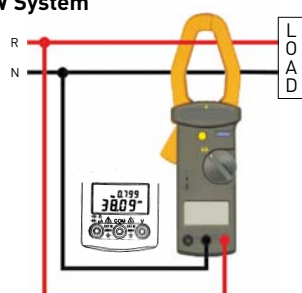


Press "RANGE" Key to Select KW+HP, KW+PF, KW+KVAR, KVA+ θ or A+V
 $HP = 746 \text{ watts}$
 $KVA = (V \times A) / 1000$
 $KVAR = KVA \times \sin\theta$
 $PF = \frac{KW}{KVA} = \cos\theta$

3 ϕ 3W System

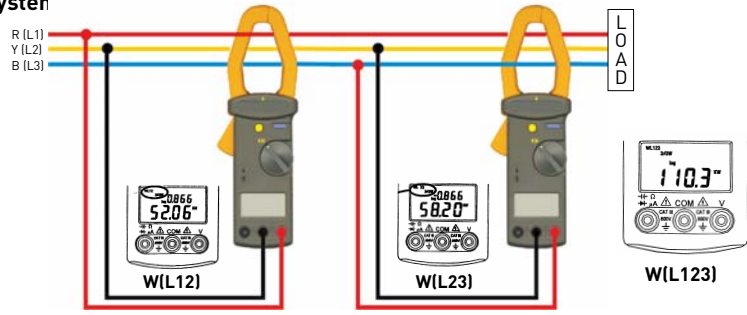


$W_3\phi 3W = W_R(L1L2) + W_B(L3L2)$
 $KVA_{3\phi 3W} = \sqrt{KW^2_{3\phi 3W} + KVAR^2_{3\phi 3W}}$
 $PF_{3\phi 3W} = \frac{KW_{3\phi 3W}}{KVA_{3\phi 3W}}$

3 ϕ 4W System

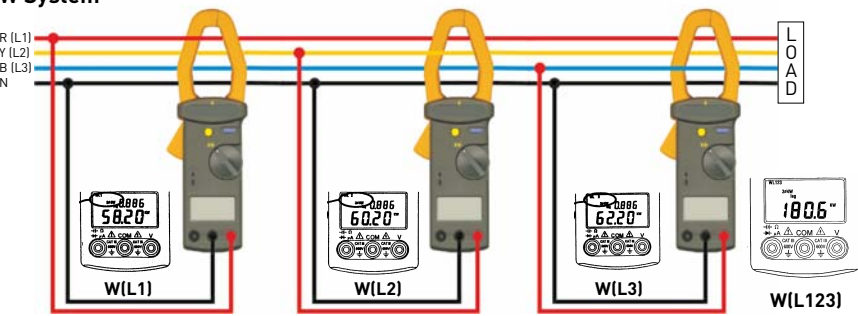

$W_3\phi 4W = W_R(L1) + W_Y(L2) + W_B(L3)$
 $KVA_{3\phi 4W} = \sqrt{KW^2_{3\phi 4W} + KVAR^2_{3\phi 4W}}$
 $PF_{3\phi 4W} = \frac{KW_{3\phi 4W}}{KVA_{3\phi 4W}}$

3 ϕ Phase Sequence Indication

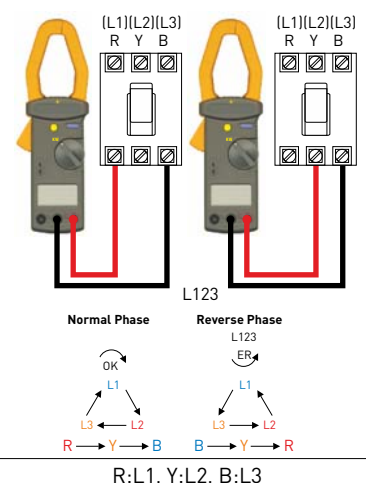

Normal Phase: R \rightarrow Y \rightarrow B
 Reverse Phase: R \rightarrow B \rightarrow Y
 R:L1, Y:L2, B:L3



4500

Electrical Specification (23°C ± 5°C)

AC+DC True Power (PF 0.2~1.0, 3φ3W, 3φ4W, 1φ2W, and 1φ3W)			
Range	Resolution	Accuracy (of rdg)	Range
0~99.99KW	0.01KW	± 2.0% ± 0.05KW	AC 600V, DC 600V, ACA/DCA 2000A
100~999.9KW	0.1KW	± 2.0% ± 0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
1000~1200KW	1KW	± 2.0% ± 5KW	AC 600V, DC 600V, ACA/DCA 2000A

AC+DC True Power (Power Factor 0.2~1.0, 3φ Balanced Power)			
Range	Resolution	Accuracy (of rdg)	Range
0~99.99KW	0.01KW	± 2.0%±0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
100~999.9KW	0.1KW	± 2.0%±0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
1000~2000KW	1KW	± 2.0%±5KW	AC 600V, DC 600V, ACA/DCA 2000A

AC+DC Voltage (True RMS, Crest Factor<4, Autorange, Overload Protection 800VAC for all range)				
Range	Resolution	Accuracy (of reading)		Input Impedance
		DC, 50/60 Hz	40 - 400 Hz	
0~200V	0.1V	±1.5% ±5 dgt	±2.0% ±5 dgt	10MΩ
200~500V	0.1V	±1.5% ±5 dgt	±2.0% ±5 dgt	
500~600V	1V	±1.5% ±5 dgt	±2.0% ±5 dgt	

AC+DC Current (True RMS, Crest Factor <4)				
Range	Resolution	Accuracy (of reading)		Overload Protection
		DC, 50/60 Hz	40-400 Hz	
0~200A	0.1A	± 1.5% ± 5 dgt	± 2.0% ± 5 dgt	AC 3000A
200~500A	0.1A	± 2.0% ± 5 dgt	± 2.5% ± 5 dgt	AC 3000A
500~2000A	1A	± 2.5% ± 5 dgt	± 3.0% ± 5 dgt	AC 3000A

How one wished, one could measure 3φ power with a single clamp meter without any manual calculations; well now it is a reality. MECO 4500 Clamp-On Power Meter does this with absolute ease and reliability. Be it 3φ4W, 3φ3W, balanced or unbalanced system. Needless to add, it also works for 1φ2W and 1φ3W systems. Handy and ideal for on-site measurement, energy audit, data recording, Q.C. testing and maintenance of the entire plant.

Features

- 3φ4 W, 3φ3 W, 3φBalanced, 1φ2 W, 1φ3 W
- AC + DC 2000 KW (3φ), 1200 KW (1φ)
- Dual display KW + PF, KVA + KVAR, V+A, V+ Hz, A+ Hz
- Phase Angle Measurement (±90°), Phase Sequence Indication (R,S,T)
- AC 600V, DC 600V, AC + DC 2000A
- Power Factor
- AC/DC Auto Detection
- TRMS Values
- Memory of 4 records
- Auto Range

KVA + KVAR



V + Hz



$$\text{Power Factor (PF)} \quad \text{PF} = \frac{\text{KW}}{\text{KVA}}$$

$$\text{AC + DC KVA (Apparent Power)} \quad \text{KVA} = \frac{\text{V} \times \text{A}}{1000}$$

$$\text{AC + DC KVAR (Reactive Power)} \quad \text{KVAR} = \sqrt{(\text{KVA})^2 - (\text{KW})^2}$$

General Specifications

Jaw Opening	Cable Dia. 55mm. (approx.) Bus Bar 65 (D) x 24 (W) mm
Power	9V Battery
Display	2 x 4 Digits Dual Display LCD
Range Selection	Auto
Overload Indication	OL
Power Consumption	25mA (approx.)
Low Battery Indication	B
Sampling Time	0.5 sec. (V and A) 1.6 sec. (W)
Operating Temp.	4° to 50°C
Operating Humidity	<85% RH
Storage Temperature	-20°C to 60°C
Storage Humidity	<75% RH
Dimensions	271 x 112 x 46 mm
Weight	650gms Battery Including (approx.)
Accessories	Carry Bag x 1, Users Manual x 1, Battery (Installed) x 1, Test Lead x 1 Pair

Phase Angle (Must zero the current reading before measurement)			
Range	Accuracy	Sensitivity	Remark
-90° to + 90° (50/60 Hz)	± 2.0°	V > 100V, A > 10A	Zero Crossing Detection


* If current signal is not detected, the phase angle will be left blank in LCD.

Frequency (if <10 Hz, Hz = 0)		
Range	Accuracy	Sensitivity
50/60 Hz	± 2dgts	V > 1V, A > 5A
10~400 Hz	± 0.5% ± 2dgt	V > 1V, A > 5A



Calibrating Equipment / CT's / Decode Resistance Box

- ✓ Universal Calibrator
- ✓ Multifunctional Calibrator
- ✓ AC Multifunctional Calibrator
- ✓ Multifunction Process Calibrator
- ✓ High Voltage Resistance Box
- ✓ Clamp – On CT'S & Flexible AC Current Probe



+60 YEARS
ONE MISSION



Reliable



Long-Lasting




Affordable



FEATURES / PARAMETERS		90A	90DQ	90P
DISPLAY	5½ Digit Display	✓	✓	✓
SYSTEM (1 PHASE)	DC	✓	✓	-
	AC	✓	✓	✓
VOLTAGE (V)	AC/DC V : (0 - 200mV to 1000V)	✓	-	-
	AC/DC V : (0 - 250mV to 1000V)	-	✓	-
	AC V : (0 - 1V to 1000V)	-	-	✓
CURRENT (A)	AC/DC A : (0 - 100µA to 20A)	✓	-	-
	AC/DC A : (0 - 100µA to 50A)	-	✓	-
	AC A : (0 - 10mA to 100A)	-	-	✓
FREQUENCY (Hz)	SYNCH	-	✓	-
	50 Hz	✓	✓	-
	60 Hz	✓	✓	-
	400 Hz	✓	✓	-
	1 KHz	-	✓	-
	40 Hz to 70 Hz	-	-	✓
RESISTANCE	10Ω to 24k x 1kΩ	✓	✓	-
PHASE ANGLE	0 to 359.99°	-	-	✓
POWER (1 PHASE)	Range : 0 to 100kW	-	-	✓
POWER FACTOR	Range : -1 to +1	-	-	✓
COMMUNICATION PORT	RS232	✓	✓	✓
KEY ADJUSTOR		✓	✓	✓
WORKS CALIBRATION CERTIFICATE TRACEABLE TO NPL		✓	✓	✓
STANDARD CURRENT COIL (OPTIONAL)	Input 5A (Max.), Turn Ratio 100 / 1	-	✓	✓
	Input 10A (Max.), Turn Ratio 100 / 1	-	✓	✓
	Input 20A (Max.), Turn Ratio 50 / 1	✓	-	-

Applications

- R & D Labs
- NABL Labs
- Educational Institutes
- Paper & Pulp Industries
- Automobile Industries
- Textile Industries
- Calibration Labs
- Chemical Process Industries
- Cement Plants
- Instrument Manufacturing Companies
- Medical Industries
- Petrochemical Industries

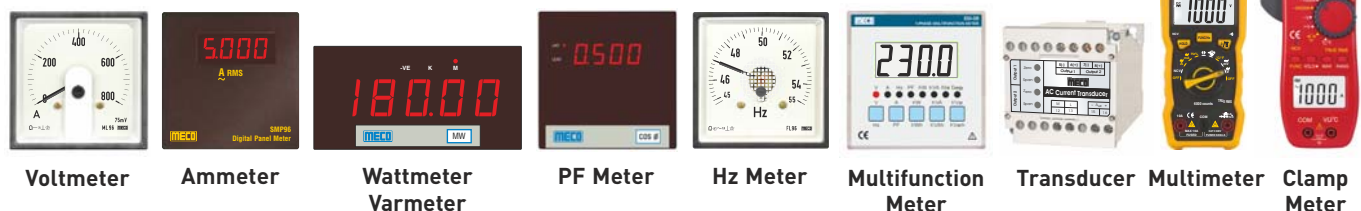



90A



Key Adjuster

MODEL 90A Universal Calibrator gives a standard output for AC Voltage, DC Voltage, AC Current & DC Current. Keys or Knob help to adjust the magnitude of the output signals. Important features include wide range, high accuracy, good stabilization, easy operation and portability. The Calibrator is ideal for testing ammeters and voltmeters upto 0.2 accuracy class.

Applications

- Calibration of AC Volt, Amp, Frequency Meters
- Calibration of DC Volt, Amp Meters
- Calibration of Resistance Meters, Clamp Meters, Multimeters

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 2 x Fuse (2A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil



Turns Ratio	50 / 1
Input Max.	20A
Current	1000A
Clamp Jaw	> 28mm
DC Impedance	0.9Ω
DC Burden	20A / 1.3V
AC Burden	20A / 3V
Frequencies	DC to 60Hz
Accuracy	± 0.3% rdg

Technical Specifications

Voltage Control	Output Voltage Range :	200mV, 1V, 2V, 5V, 10V, 20V, 50V, 100V, 200V, 500V, 1000V
	Basic Error :	DCV : ± (0.03 %RD + 0.02 %FS) ACV : ± (0.05 %RD + 0.03 %FS)
Current Control	Output Current Range :	100μA, 500μA, 2mA, 5mA, 20mA, 50mA, 200mA, 500mA, 2A, 5A, 20A
	Basic Error :	DCI : ± (0.05 %RD + 0.02 %FS) ACI : ± (0.07 %RD + 0.03 %FS)
Frequency Control	Frequency Range :	50Hz, 60Hz, 400Hz
	Frequency Error :	< 1 %
Resistance Control	Resistance Range :	10, 24, 50, 100, 240, 500 (Ω), 1, 2.4, 5, 10, 24 (kΩ), 10x1k, 24x1k, 50x1k, 100x1k, 240x1k, 500x1k, 1kx1k, 2.4kx1k, 5kx1k, 10kx1k, 24kx1k
	Basic Error :	± 0.2 % +20mΩ

General Specifications

Note - RD : Reading, FS : Full Scale

- Stability DC : < 0.01 %FS / 2 min, AC : < 0.03 %FS / 2 min
- Ripple : < 0.1 %
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 180 VA
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ≤ 80 %
- Distortion : < 0.5 %
- Display : 5½ Digit LED Digital Display
- Step adjustment of Output Signal : 10 %FS, 1 %FS, 0.1 %FS, 0.05 %FS
- Dimensions : 147 x 480 x 480mm (approx.)
- Total Weight : 17 kgs (approx.)



MODEL 90DQ Multifunctional Calibrator can output standard AC Voltage, DC Voltage, AC Current & DC Current. Output actual value, percent and FS display at the same time. Calibrator may select FS (full scale) and relevant step in according with scale of UUT (unit under test). Keys or knobs adjust magnitude of the output signals. Wide range, high accuracy, good stabilization, easy operation and portable. The calibrator is ideal to test amperemeter and voltmeter upto 0.2 class.

Applications

- Calibration of AC Volt, Amp, Frequency Meters
- Calibration of DC Volt, Amp Meters
- Calibration of Resistance Meters, Clampmeters & Multimeters

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 1 x Pair of Output Leads (50A)
- 2 x Fuse (4A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil



Turns Ratio	100 / 1	100 / 1
Input Max.	5A	10A
Current	500A	1000A
Clamp Jaw	> 20mm	> 28mm
DC Impedance	0.7Ω	0.9Ω
DC Burden	5A / 3.5V	10A / 2.5V
AC Burden	5A / 6V	10A / 5V
Frequencies	DC to 60Hz	DC to 60Hz
Accuracy	± 0.3% rdg	± 0.3% rdg


Technical Specifications

Voltage Control	Output Voltage Range : Basic Error :	250mV, 1V, 2.5V, 5V, 10V, 25V, 50V, 100V, 250V, 500V, 1000V DCV : ± (0.02 %RD + 0.01 %FS) ACV : ± (0.05 %RD + 0.02 %FS)
Current Control	Output Current Range : Basic Error :	100μA, 500μA, 2.5mA, 10mA, 25mA, 100mA, 250mA, 1A, 2.5A, 10A, 50A DCI : ± (0.03 %RD + 0.02 %FS) ACI : ± (0.05 %RD + 0.03 %FS)
Frequency Control	Frequency Range : Frequency Error :	50Hz, 60Hz, 400Hz, 1kHz < 0.1 %
Resistance Control	Resistance Range : Basic Error :	10, 24, 50, 100, 240, 500 (Ω), 1, 2.4, 5, 10, 24 (kΩ), 10x1k, 24x1k, 50x1k, 100x1k, 240x1k, 500x1k, 1kx1k, 2.4kx1k, 5kx1k, 10kx1k, 24kx1k ± 0.2 % +20mΩ

General Specifications

Note - RD : Reading, FS : Full Scale

- Stability DC : < 0.01 %FS / 3 min, AC : < 0.02 %FS / 3 min
- Ripple : < 0.2 %
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 250 VA
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ≤ 80 %
- Distortion : < 0.5 %
- Display : 5½ Digit LED Digital Display
- Step adjustment of Output Signal : 100 %FS/N, 10 %FS/N, 1 %FS/N, 0.1 %FS/N (N = 4, 5, 6, 10 and 15)
- Dimensions : 190 x 480 x 545mm (approx.)
- Total Weight : 22.5 kgs (approx.)

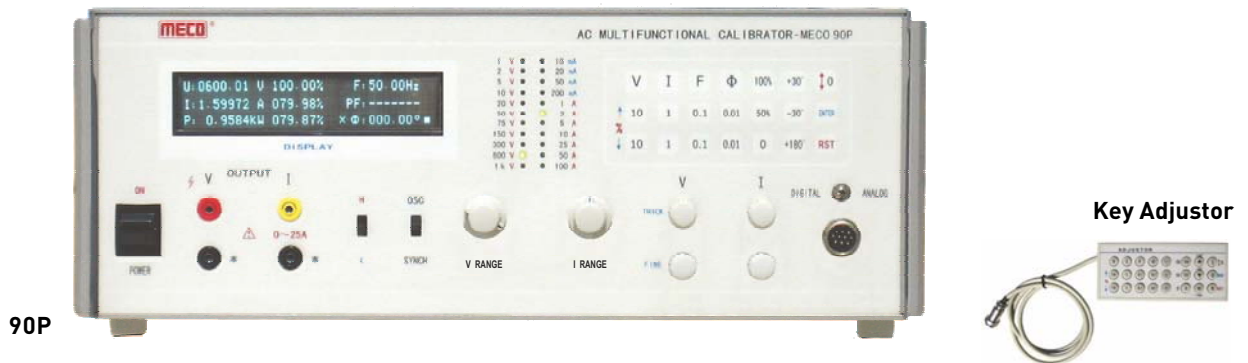

MODEL 90P AC Multifunctional Calibrator can output standard AC Voltage and AC Current. It measures AC Voltage, AC Current, Power, Phase Angle, Power Factor and Frequency (40Hz - 70Hz). Wide output range of Current and Voltage; High reliability and low wave distortion.

Applications

- Calibration of Power Meters, AC Volt, Amp, Watt, Var, Frequency, Powerfactor, Phase Angle and Energy Meters.
- Calibration of Voltage, Current, Active & Reactive Power, Frequency, Powerfactor, Phase Angle and Energy Transducers.

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 1 x Pair of Output Leads (50A/100A)
- 2 x Fuse (4A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil



Turns Ratio	100 / 1	100 / 1
Input Max.	5A	10A
Current	500A	1000A
Clamp Jaw	> 20mm	> 28mm
DC Impedance	0.7Ω	0.9Ω
DC Burden	5A / 3.5V	10A / 2.5V
AC Burden	5A / 6V	10A / 5V
Frequencies	DC to 60Hz	DC to 60Hz
Accuracy	± 0.3% rdg	± 0.3% rdg


Technical Specifications

Voltage Control	Output Voltage Range :	1V, 2V, 5V, 10V, 20V, 50V, 75V, 150V, 300V, 600V, 1000V
	Min. Resolution :	0.02mV
Current Control	Output Current Range :	10mA, 20mA, 50mA, 200mA, 1A, 2A, 5A, 10A, 25A, 50A, 100A
	Min. Resolution :	0.2μA
Frequency Control	Frequency Range :	40Hz to 70Hz
	Frequency Error :	± 0.02 Hz
Phase Control	Resistance Range :	0 to 359.99°
	Phase Error :	± 0.05°

General Specifications

Note - RD : Reading, FS : Full Scale

- Power Range : 0 to 100kW
- Power Basic Error : ± (0.07 %RD + 0.03 %FS)
- Stability V, I : < 0.01 %FS / 2 min, P : < 0.02 %FS / 2 min
- Distortion : < 0.5 %
- Power Factor Range : -1 to +1
- Power Factor Basic Error : ± 0.001 (PF 0 to ±0.8); ±0.0005 (PF -0.8 to -1, +0.8 to +1)
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 300 VA
- Display 5½ Digit VFD Digital Display
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ≤80 %
- Dimensions : 192 x 480 x 540mm (approx.)
- Total Weight : 23 kgs (approx.)

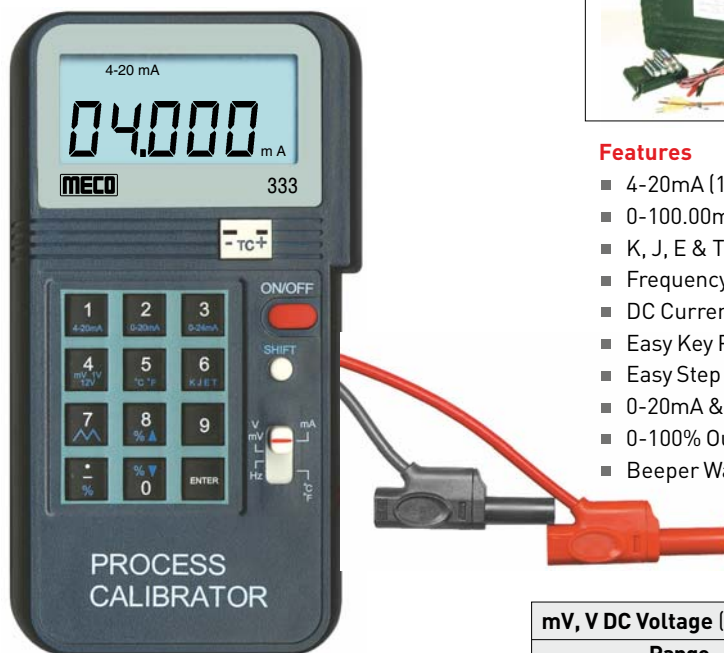

333

Features

- 4-20mA (1KΩ Load, 24V Loop Supply) with 1μA Resolution
- 0-100.00mV, 0-1.0000V, 0-12.000V
- K, J, E & T Thermocouples (°C and °F)
- Frequency : 1-62500 Hz
- DC Current Basic Accuracy : 0.025%
- Easy Key Pad Number Operation
- Easy Step and Auto Ramp Functions
- 0-20mA & 0-24mA Selectable
- 0-100% Output (mA, mV, V)
- Beeper Warning when Output is Open (mA) or Short (mV, V)

mV, V DC Voltage (1mA Supply Current)

Range	Resolution	Accuracy
0-100.00 mV	10 μV	± 0.05%rdg ± 30 μV
0-1.0000 V	100 μV	± 0.05%rdg ± 300 μV
0-12.000 V	1 mV	± 0.05%rdg ± 3mV

Beeper Warning when Output is short and specified Voltage Output >10mV

Electrical Specifications (23°C ± 5°C, 10 minutes after power is on)

mA DC Current (1KΩ max. Load, 24V Loop Supply)		
Range	Resolution	Accuracy
4-20 mA, 0-20 mA, 0-24 mA	1 μA	± 0.025%rdg ± 3μA

Beeper Warning when Output is Open and specified Current Output >1mA

Frequency (1KΩ Load Min.)

Range	Resolution	Accuracy
1-125 Hz	1 Hz	± 0.04 Hz
126-62500 Hz	1 Hz	± 0.01% ± 0.04 Hz

K, J, E and T Type Thermocouples (1°C, 1°F Resolution, 1KΩ Load Min.)

Range	Accuracy	Range	Accuracy
K : -200 to -100°C	± 2.0°C	K : -328 to -148°F	± 3.6°F
K : -100 to 0°C	± 1.1°C	K : -148 to 32°F	± 1.8°F
K : 0 to 1370°C	± 0.8°C	K : 32 to 2400°F	± 1.5°F
J : -100 to 0°C	± 0.9°C	J : -148 to 32°F	± 1.6°F
J : 0 to 760°C	± 0.7°C	J : 32 to 1400°F	± 1.2°F
E : -100 to 0°C	± 0.9°C	E : -148 to 32°F	± 1.6°F
E : 0 to 700°C	± 0.7°C	E : 32 to 1292°F	± 1.2°F
T : -200 to 0°C	± 1.0°C	T : -328 to 32°F	± 1.8°F
T : 0 to 400°C	± 0.8°C	T : 32 to 752°F	± 1.5°F

General Specifications

Power	9V Battery & External Battery Pack (Six x 1.5V "AA" Batteries)
Display	4 and 5 Digits LCD Display with Annunciator
Operating Environment	0° to 50°C (32 to 122 °F), RH <85%
Storage Environment	-20°C to 60°C (-4 to 140°F), RH <85%
Dimensions	88 x 168 x 38 mm [approx.]
Weight	330gms Including Battery [approx.]
Accessories	Carrying Case x 1, Users Manual x 1, K type Thermocouple Connector x 1, External Battery Pack Holder, 9V Battery, Pair of Alligator Test Leads x 1



333P+

Introduction

Model 333P+ Multifunction Process Calibrator has Multiple Signal Measurement and Output Functions, including Voltage, Current, Thermocouple, Resistance. It is with Large LCD Screen and Key Pad for Easy Operation. Key features are long standby time, high accuracy and Programmable Output function.

Accessories



Applications

- Used in the Debugging of PLCs
- Process Instruments
- Electric Valves
- Industrial Sites
- Laboratories
- Two Wire Transmitter Simulator

Features


- Voltage Signal : 0 - 30V, 0 - 25mV, 0 - 100mV DC
- Current Signal : 0 - 25mA, 4 - 20mA DC
- K, E, J, T, R, B, S, N Thermocouples
- Reverse Connection and Process Protection: 30V
- Cold End and Programming Function
- Auto Power OFF
- Range Conversion Function
- Numeric Modifier Keys
- Drive Current 24mA
- Range Conversion Function
- PT100 Thermistor

General Specifications

Unit	mA / mV / V / °C / Ω
Operating Environment	-10°C to 55°C
Storage Environment	-20°C to 70°C
Humidity	20 to 80% RH
Dimensions	115 x 70 x 26mm (approx.)
Accessories	Signal Generator x 1, Users Manual x 1, Signal Cable x 3, USB Cable x 1, Charging Plug x 1, Tool Kit x 1, Test Leads (Red and Black) x 1

Electrical Specifications

Signal	Type	Range	Accuracy	Resolution Ratio
DC Voltage	20mv	0.00 to 24.00mV	±0.1%	0.01mV
	100mv	0.0 to 100.0mV	±0.1%	0.1mV
	V	Output : 0.00 to 15.00V	±0.1%	0.01mV
		Measure : 0.00 to 30.00V	±0.1%	0.01mV
DC Current	mA	0.00 to 24.00mA	±0.1%	0.01mA
	4 - 20mA	4/8/12/16/20mA	±0.1%	0.01mA
Passive Current	mA	0.00 to 24.00mA	±0.1%	0.01mA
Power Distribution Output	24V LOOP	24V / 16V	10%	0.1V
TC	K	-270 to 1372°C	±1%	1°C
	E	-270 to 1000°C	±1%	1°C
	J	-210 to 1200°C	±1%	1°C
	T	-270 to 400°C	±1%	1°C
	R	-50 to 1768°C	±1%	1°C
	B	250 to 1820°C	±1%	1°C
	S	-50 to 1768°C	±1%	1°C
	N	-270 to 1300°C	±1%	1°C
RTD	PT100	-200 to 850°C	±0.5%	0.1°C
Resistance	Ω	20 to 400Ω	±0.5%	0.1Ω

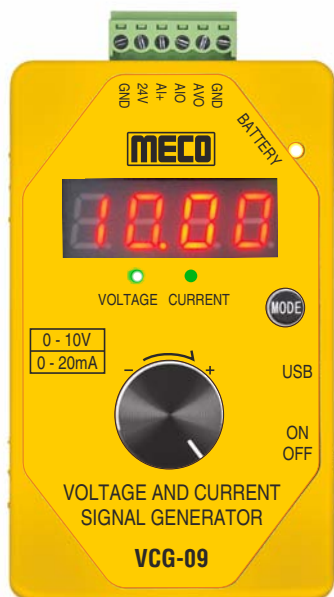

VCG-09

Features

- Built-in 3.7V, 1000mAh lithium Battery Power Supply (Optional)
- 4 Hours at Internal Lithium Battery Full Power Supply, Active Output 20mA
- Connecting Terminal
- Battery Indicator
- External 9 ~ 30V DC Input Power Supply
- External Micro-USB 5V Power Supply

Introduction

MECO VCG-09 Signal Generator has a Multiple Measurement of Current or Voltage range output with Bright LED Display. Rotary Knob with Easy Operation is key feature.

Applications

- Equipment Debugging in Laboratories
- Industrial Sites
- Electric Valves

Specifications

Operating Environment	-10°C ~ 55°C
Relative Humidity	10% ~ 90% RH
Voltage Output	
Output Range	0 ~ 10V
Output Resolution	0.1V
Output Load	>10KΩ
Current Output	
Output Range	0 ~ 20mA
Output Resolution	0.1mA
Output Load	< 350Ω



FCT Series

Model FCT Series

MECO FCT is a Flexible Current Transformer based on the Rogowski principle. It is suitable to conveniently measure Single / Three Phase AC and Pulsed DC Currents. After approximate signal conditioning, it can be used with Digital Multimeters, Recorders and other suitable equipment to measure current from very low frequencies up to 1MHz.

The probes comprises of a flexible air-cored sensor which can be opened and installed around a primary conductor without interrupting the circuit. The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas and over large conductors. Inner Diameter / Window Size and leads can be customized.

Flexible AC Current Probe

Typical Voltage Output VoRMS (Sinusoidal Current)	$(2.183 \times 10^{-4}) \times I_{RMS} \times \text{Frequency}$
VoRMS (at 3000ARMS, 50 Hz)	300mV AC
Rated Current (RMS)	3000A
Inner Diameter / Window Size	100mm (5")
Coil Diameter	9 mm
Internal Resistance per Probe	120Ω
Operating Temperature Range	-10°C to + 60°C
Storage Temperature Range	-20°C to + 70°C

Bandwidth	5Hz ~1MHz
Accuracy	± 0.2%(Most accurate position, 25°C)
Phase Shift	90 ± 0.2 degrees
Temperature Sensitivity	0.08% per °C
Position Sensitivity	± 0.5%
Working Voltage	1000V AC RMS

Ordering Information : Model, Rated Input (A AC) & Rated Output



CCT50



CCT602

MECO CCT Series of Clamp-On Current Transformer's are designed for fast and easy installation. Clamp-On Current Transformer uses Permalloy Magnetic Core or Silicon Amorphous Core, with characteristics of small size, high precision, good stability and strong anti-interference ability. These sensors give a standard AC Current output which is suitable to conveniently measure on Single Phase / Three Phase Circuits with good stability and high anti-interference ability. It is ideal for power and energy measurement with high precision and small phase angle error in applications related to electric power, communication, monitoring and control. It can measure a variety of electric parameters without removing cables. The Standard length of Output Leads is 2 Meter. However Output and Leads Cable can be customized.

Features

- Clamp-On Design, Safe, Easy to Install, Portable.
- Wide Inner Window, Allowing Clamping of Big Cables or Bus-Bars.
- Silicon Steel / Permalloy Core
- Operating Temperature -25°C to 75°C
- Operating Humidity < 85%
- Output Connection UL1015 22AWG Wire (Twisted Wire) 2m

Applications

- Current Measurement, Monitoring and Protection for Electrical Wiring and Equipment.
- Current and Power Measurement for Electric Motors, Lighting, Air Compressor, Heating and Ventilation System, Air-Condition Equipment and Automation-Control System.
- Current, Power and Energy Monitoring Device.

Electrical Specifications

Frequency	50 - 400Hz
Rated Input	As Below
Measuring Range	5% In - 130% In
Rated Output	0 - 5A AC (Standard) 0 - 1A AC or 0-10V AC (Optional)
Ratio	≤ ± 0.1 %
Phase Angle	≤ ± 10min
Dielectric Strength	3.0KV / 1mA / 1min
Insulation Resistance	DC500V / 100MΩ min

Specification

Model	Rated Input (A AC)	Rated Output	Accuracy	Window Size (mm) (ID)
CCT50	0 - 100A	5A AC	2.5% ≤60A, 1.0% >60A	50
	0 - 500A		1.0%	
	0 - 1000A			
CCT602	0 ~ 2000A		60	

Ordering Information : Model, Rated Input (A AC) & Rated Output



90DR



90DR45D

Parameters	Specifications
Resistance Range	0.01MΩ ~ 5GΩ
17 Selectable Fixed Resistance Values	0.01MΩ, 0.05MΩ, 0.1MΩ, 0.2MΩ, 0.5MΩ, 1MΩ, 2MΩ, 5MΩ, 10MΩ, 20MΩ, 50MΩ, 100MΩ, 200MΩ, 500MΩ, 1kMΩ, 2kMΩ, 5kMΩ
Accuracy	±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.5%, ±0.5%, ±0.5%, ±1%, ±1%, ±1%, ±2%, ±2% (respectively)
Voltage Range (DC)	100V, 200V, 300V, 400V, 500V, 1kV, 1kV, 1kV, 1kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV (respectively)
Insulation Resistance between Circuit and Housing	>500GΩ
Maximum With Stand Voltage Between Circuit and Housing	2000V AC For <60 Seconds
Working Temperature	20 ± 5°C (Typical) 20 ± 5°C (Reference)
Storage Temperature	-10 ~ 40°C, ≤ 75% RH
Humidity	25% ~ 75% (Typical) 30% ~ 60% (Reference)
Dimension	310 x 240 x 160mm (approx.)
Weight	3.6Kg (approx.)
Applications	<ul style="list-style-type: none"> ■ Checking of HV Insulation Testers ■ Research Laboratories ■ Factories ■ School & Institute ■ Accreditation Laboratories ■ Certification Agencies

Parameters	Specifications
Display	4½ Digit Display
Resistance Range	0 ~ 211.1111110GΩ
10 Adjustable Potentiometric Resistance	$\times 10^2$, $\times 10^3$, $\times 10^4$, $\times 10^5$, $\times 10^6$, $\times 10^7$, $\times 10^8$, $\times 10^9$, $\times 10^{10}$, $\times 10^{11}$
Accuracy	±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.5%, ±1%, ±2%, ±5%, ±10% (respectively)
Current / Voltage Value of Each Resistance	50mA, 20mA, 10mA, 2mA, 1000V, 2500V, 5000V, 5000V, 5000V (respectively)
Voltage Range	0 ~ 1999.9V ~ 5000V (RMS / V _{pp})
Accuracy	±(1% rdg + 2digits)
Input Impedance	10GΩ ± 10%
Insulation Resistance between Circuit and Housing	1TΩ
Maximum With Stand Voltage Between Circuit and Housing	10000V AC(RMS) For <60 Seconds
Working Temperature and Humidity	20 ± 5°C, ≤ 65% RH
Storage Temperature and Humidity	-10 ~ 55°C, ≤ 80% RH
Dimension	520 x 285 x 180 mm (approx.)
Power	9V Battery
Weight	5.3Kg (approx.)
Applications	<ul style="list-style-type: none"> ■ Checking of HV Insulation Testers ■ Research Laboratories ■ Factories ■ School & Institute ■ Accreditation Laboratories ■ Certification Agencies



Welcome to MECO



Sales & Marketing Department



Product Display Gallery



Store & Material Handling



SMT & Reflow Machine



Quality Control



Meter Assembly Line



Factory Automation



Enviromental & Burn-In Chambers



World Class Calibrating Equipment



Production Line



Vibration Test



Outgoing QC



Training & Seminars



Awards

ISO 9001-2015 Certified Company

MECO INSTRUMENTS PRIVATE LTD.

📍 EL-1, MIDC Electronic Zone, TTC Industrial Area, Mahape, Navi Mumbai - 400710, Maharashtra, INDIA

MECO METERS PRIVATE LTD.

📍 EL-60, MIDC Electronic Zone, TTC Industrial Area, Mahape, Navi Mumbai - 400710, Maharashtra, INDIA



Sales : +91-93233 32435

North India & Goa : +91-93244 11558

South India : +91-93242 89268

East India, M.P. & Gujarat : +91-93244 05281

Maharashtra : +91-93720 11735

Board : +91-90824 11887

Service Centre : +91-73033 96162, +91-22-2763 6162

✉ sales@mecoinst.com 🌐 www.mecoinst.com 🔗 [X](#) [f](#) [in](#) [ig](#)

SCAN ME



Website