MECO®

SINCE 1962

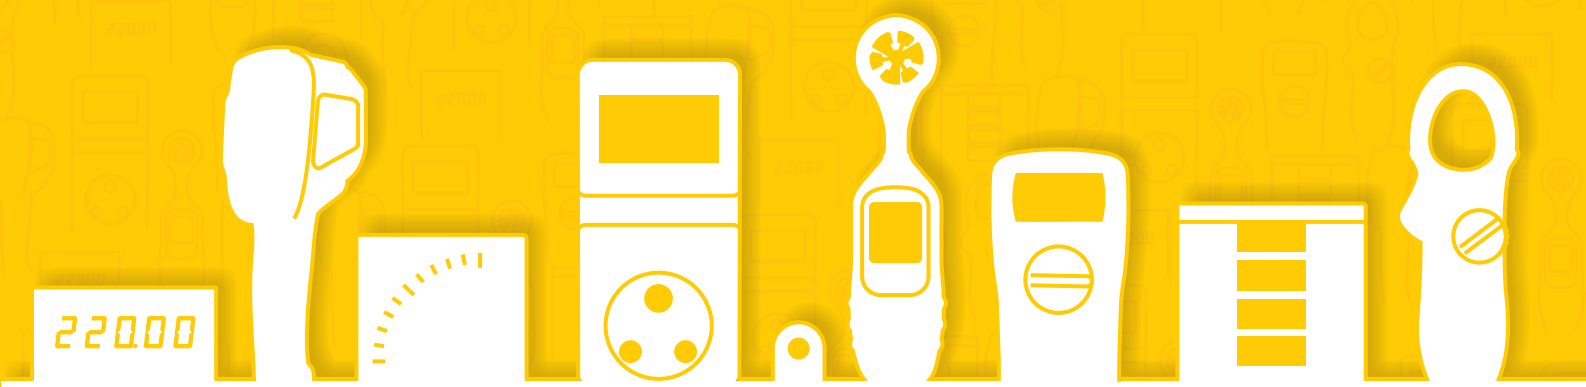

Reliable, Long-Lasting and Affordable Instruments ... since 1962 !

BUREAU VERITAS
Certification

MECO INSTRUMENTS PVT. LTD.

MECO

PLOT NO. EL-1, MIDC ELECTRONIC ZONE, TTC INDL AREA, MAHAPE, NAVI MUMBAI – 400 710, MAHARASHTRA, INDIA.

Bureau Veritas Certification Holding SAS – UK Branch certifies that the Management System of the above organization has been audited and found to be in accordance with the requirements of the Management System standard detailed below:

Standard

ISO 9001:2015

Scope of certification

MARKETING, DESIGN AND MANUFACTURING OF VARIOUS ELECTRICAL / ELECTRONIC MEASURING INSTRUMENTS, ELECTRICAL TRANSDUCERS AND ACCESSORIES

Original cycle start date:	**14 December 2002**
Expiry date of previous cycle:	**13 December 2017**
Recertification Audit date:	**18 November 2017**
Recertification cycle start date:	**19 December 2017**

Subject to the continued satisfactory operation of the organization's Management System, this certificate expires on: **13 December 2020**

Certificate No. **IND17.2907U/Q** Version : **1** Revision date: **19 December 2017**

Signed on behalf of BVCH SAS – UK Branch
Ramesh KOREGAVE
Director, CERTIFICATION
South Asia Region

ISO 9001:2015 CERTIFICATE

25 JAN 2007

पावर ग्रिड कारपोरेशन ऑफ इंडिया लिमिटेड
(भारत सरकार का उद्यम)
POWER GRID CORPORATION OF INDIA LIMITED
(A Government of India Enterprise)
पावरग्रिड

Corporate Office "Saudamini" Plot No. 2, Sector-29, Gurgaon-122 001 Haryana
Tel. 2571700 - 719 Fax 2571760 2571761 Gram : NATGRID

पत्र संख्या/Ref. Number

C/QA&I/SV January 23, 2007

M/s Meco instruments Pvt. Ltd.,
Plot No.EL-1, MIDC Electronic Zone
TTC Industrial Area, Mahape,
Navi Mumbai-400710

Fax No. 022-27673310/27673330

Kind Attn. : **Shri Kamal Goliya (CEO)**

Sub : **Approval of MECO Make Indicating Instruments, Transducers & Meters.**

Dear Sir,

This has reference to your letter no. nil dated 17.01.2007. In this regard, we have reviewed your request and hereby convey our approval of MECO Instruments Pvt. Ltd., Mumbai (MECO make) as a vendor for supply of indicating instruments, meters (analog an digital), transducers, indicating meters with transducers under LT Panel, DG sets, AC & DC Control Panels, Miscellaneous erection items for switchyard, transformer & reactors and control & relay panel packages for POWERGRID projects. This approval will be treated in continuation to our approval accorded vide letter no. C/QA&I/SV dated 23.01.2004.

Thanking you,

Yours faithfully,

(D. CHAKRABORTY)
DY. GENERAL MANAGER (QA&I)

पंजीकृत कार्यालय : बी-9, कुतब इंस्टीट्यूशनल एरिया, कटवारिया सराय, नई दिल्ली-110016 दूरभाष 26560121 फैक्स 011-26560039 ग्राम NATGRID
Registered Office B-9 Qutab Institutional Area, Katwaria Sarai, New Delhi-110016 Tel. 26560121 Fax 011-26560039 Gram NATGRID

PGCIL APPROVAL

सत्यमेव जयते

TEST / CALIBRATION REPORT

Type Test Report
for
MECO AC Voltage Transducer

Testing as per IEC 60688 (Edition 2.2)

ELECTRONICS REGIONAL TEST LABORATORY (WEST)
MINISTRY OF COMMUNICATIONS & INFORMATION TECHNOLOGY, (STQC Dte.)
Government of India

Plot No. F 7 & 8, MIDC Area, Opp.SEEPZ,
Andheri (E), Mumbai-400 093.
Phone : (022) 2832 5134, 2830 1468, 2830 1138 Fax : (022) 2822 5713
E-mail : ertlbom@bom4.vsnl.net.in

TTR -

STQC TYPE TEST REPORT

इंजीनियर्स इंडिया लिमिटेड
ENGINEERS INDIA LIMITED
(A Govt. of India Undertaking)

पंजीकृत कार्यालय : इंजीनियर्स इंडिया भवन, 1, भीकाएजी कामा प्लेस, नई दिल्ली–110066
Regd. Office : Engineers India Bhavan, 1, Bhikaiji Cama Place, New Delhi - 110066

Procurement Development Department

Ref: 4994/PDD/I/RE/M-239 21st March, 2005

M/s MECO Instrument Pvt. Ltd.
301, Bharat Industrial Estate
T.J. Road, Sewree
Mumbai - 400 015.

Subject : Revalidation of Enlistment with EIL

Dear Sirs,

We refer to your application on subject matter and are pleased to inform that your enlistment with EIL has been revalidated for the items as described below :

Item/Description	Type
Meters	Voltmeters, Ammeters, KW Meters, Frequency Meters, Power Factor Meters

This enlistment is valid for your works located at Giriraj Building, 3rd Floor, T.J. Road, Sewree, Mumbai - 400 015)

Please note that this revalidation is subject to satisfactory execution of orders / sub-orders in delivery and quality of above mentioned items when ordered / sub-ordered for our various projects.

Further, it may be noted that any change in the product range, location of Works/Sales Office, Management/ Organisation structure etc. shall be intimated to us immediately along with relevant document for our necessary action. In case, information to any of the above referred changes is not intimated timely, our enquiries may not reach you and your enlistment with us is liable to be cancelled. Enlistment with EIL shall not guarantee any regular flow of enquiries.

The validity of this ENLISTMENT is upto 31st March, 2008.

You are advised to contact us 6 months before expiry of the enlistment, so that revalidation of your enlistment is taken up.

Thanking you,

Very truly yours

(Bhagel Yadav)
Dy. General Manager
Procurement Development Department

उत्कृष्टता का आधार – हमारे कर्मी DELIVERING EXCELLENCE THROUGH PEOPLE
फोन/Phone : +91-11-2610 2121 (EPBAX) फैक्स / Fax : +91-11-26192620 +91-11-26187622
+91-11-26101419 (DISA) Visit us at http://www.engineersindia.com
हिन्दी देश की एकता की कड़ी है।

EIL APPROVAL

Company Introduction

We are an ISO 9001 : 2015 certified company offering **reliable, long - lasting and affordable instruments** since over five decades. Our team of skilled and trained personnel is equipped with complete in-house facility for design, development and manufacturing world class products with innovative features. Customer focus, product innovation and technological excellence are the prime concern of every member at MECO.

Many of our products have been designed / upgraded by our R & D Department which is recognized by Department of Scientific & Industrial Research, Ministry of Science & Technology, Government of India, New Delhi. We hold over 30 design patents which are registered with The Controller General of Patents, Designs and Trade Marks, Government of India. Our products are certified by some of India's most reputed testing laboratories like ERTL, IDEMI, Karindikar Laboratories & NPL. The high quality of our products is always a great value addition for the end user.

To strengthen our manufacturing process we have added SMT Pick & Place Machine, Solder Reflow Machine, Robotic Screw Fitting Machine, Dial Printing and Pad Printing Machines. We have one of the latest and largest range of testing equipment and standards which act as a reliable backbone to our Q.A. and Calibration System. Using the state of art electronics, firmware and mechanical infrastructure along with skilled and experienced work force, MECO also acts as an OEM to manufacturers in Germany, Italy, UK and USA.

Keeping pace with the requirements of various industry sectors, we have instruments in the following major categories :

- Multifunction Meters
- Power Line Transducers
- Digital Multimeters
- Digital and Analog Insulation Testers
- Testing & Measuring Instruments
- Transformer Turns Ratio Meter
- Solar Analyzers and Solar Power Meter
- Power and Harmonic Analyzers
- Digital Panel Meters and Modules
- Analog Panel and Switchboard Meters
- Digital Clampmeters / Tongtesters
- LCR Meters and Micro / Milli Ohm Meters
- Clamp-On Earth / Ground Resistance & Leakage Current Testers
- Automotive Meters and Battery Testers
- Environment Testing Instruments
- Calibrating Equipment

MECO has a network of over 60 authorized dealers / distributors and more than 500 resellers who effectively channel the products in the entire Indian subcontinent with good penetration. Our products are exported to almost all the continents of the world through local agents and representatives.

We seek strategic alliances with companies worldwide, who can either efficiently market our products in their local markets or with companies who wish to channel their products in India through our marketing network.

As part of our CSR initiative we arrange eye checkup camps, distribution of baby kits for the newly born, installation of water coolers in government hospitals and many such activities for the welfare of society.

GIVE THE WORLD THE BEST YOU HAVE AND THE BEST IN THE WORLD COMES BACK TO YOU !!

Late. Parasmal Goliya
(Founder)

Mr. Premchand Goliya
(Chairman & Mg. Director)

Dr. Kamal P. Goliya
(CEO)

Index

1	1	Company Introduction
2	3	Index
4	7	Company Profile
		Multifunction Meters
10	10	3 Phase Multifunction Meters - Selection Guide
11	11	3 Phase VAF / VIF Meter - TRMS
12	13	3 Phase Multifunction Power & Energy Meter / Power Line Supervisor - TRMS
14	15	1P & 3P Multifunction Power & Energy Meter / Transducer with M.D. & T.H.D.
16	16	3 Phase Multifunction Power & Energy Meter with M.D. & T.H.D. - TRMS
17	17	1 Phase Multifunction Meters - Selection Guide
18	21	1 Phase Multifunction Meters - TRMS with RS-485
22	23	POWERGUARD / POWERGUARD - TRMS
		Digital Panel Meters & Modules
26	27	4 Digit Programmable Ammeter & Voltmeter - TRMS
28	29	3½ Digit Ammeter / Voltmeter
30	31	4½ Digit Programmable DC / AC Ammeter & Voltmeter - TRMS with RS-485
32	33	4½ Digit Ammeter / Voltmeter
34	34	4 Digit Triple Range Programmable Process Indicator
35	35	4½ Digit Programmable Process Indicator with RS-485
36	36	3 Phase Programmable Ammeter / Voltmeter - TRMS
37	37	4 Digit Frequency Meter / 4 Digit RPM Meter
38	38	Double Voltmeter / Double Frequency Meter
39	39	Digital Power Factor Meter (with Built-In Transducer)
40	40	Digital Wattmeter / Varmeter (with External Transducer)
41	41	5 Digit 3P Watt / VAR / VA & 4 Digit 3P PF Meter (Built-In Transducer)
42	43	Digital Wattmeter / Varmeter (with Built-In Transducer)
44	44	3½ Digit Ammeter / Voltmeter (5V DC Aux. Supply)
45	45	3½ Digit Ammeter / Voltmeter (Mini Series)
46	47	3½ & 4½ Digit LCD & LED Modules
		Power Line Transducers
50	52	Power Line Transducers - Introduction, Selection Guide & Specifications
53	53	AC Current Transducer
54	54	AC Voltage Transducer
55	55	Frequency Transducer
56	56	DC Isolation Transducer / DC - DC Converter
57	57	Active Power (Watt) / Reactive Power (Var) Transducer
58	58	Power Factor Transducer
59	59	Tap Position Transducer
		Analog Panel & Switchboard Meters
62	63	Analog Panel & Switchboard Meters - Introduction
64	64	AC Moving Iron DIN Panel Ammeter / Voltmeter
65	65	DC Moving Coil DIN Panel Ammeter / Voltmeter
66	66	AC Moving Coil Rectifier Type DIN Panel Ammeter / Voltmeter
67	67	Electronic Analog W / VAR / PF / Hz Meters
68	68	Rectangular AC & DC Panel Meter
69	69	Educational Desk Stand Meter
70	70	Analog Panel & Switchboard Meters - Dimension
		Testing & Measuring Instruments - Digital Multimeters
72	73	6½ Digit 12,00,000 Counts Bench Top Digital Multimeter - TRMS
74	74	3¾ Digit 4,000 Counts Digital Multimeter with PC Interface
75	75	3⅚ Digits 6,000 Counts Autoranging Digital Multimeter - TRMS
75	75	3½ Digits 2,000 Counts Manual Ranging Digital Multimeter
76	76	3½ Digits 2,000 Counts Manual Ranging Digital Multimeters
76	76	4½ Digits 20,000 Counts Manual Ranging Digital Multimeter
77	77	3½ Digits 2,000 Counts Autoranging Digital Multimeters
77	77	3¾ Digit 4,000 Counts Autoranging Digital Multimeter
78	78	3¾ Digits 4,000 Counts Autoranging Digital Multimeter (Pocket Size)
78	78	3⅚ Digits 6,000 Counts Autoranging Digital Multimeter - TRMS (Pocket Size)
79	79	4 Digits 9999 Counts Auto & Manual Ranging Digital Multimeters - TRMS
80	80	3⅚ Digits 6,000 Counts Autoranging Digital Multimeter - TRMS
81	81	3⅚ Digits 6,600 Counts Autoranging Digital Multimeter - TRMS

81	81	4½ Digits 20,000 Counts Autoranging Digital Multimeter - TRMS
82	82	3¾ Digits 4,000 Counts Digital Multimeter upto 2KV DC / AC
82	82	3½ Digits 2,000 Counts Digital Multimeter with Automatic Terminal Blocking
		Testing & Measuring Instruments - Digital Clampmeters / Tong Testers
84	85	Autoranging Digital Clampmeters - 600A AC TRMS / 1000A AC
86	86	Smart Digital Clamp Meter - 400A AC
86	86	Auto/ Manual Ranging Digital Clampmeters - 600A AC TRMS / 1000A AC
87	87	Auto / Manual Ranging Digital Clampmeters - 1000A AC TRMS
88	88	Autoranging Digital Clampmeters - 600A DC / AC TRMS
89	89	Autoranging Digital Clampmeter - 1200A DC / 1000A AC TRMS
90	90	Auto/ Manual Ranging Digital Clampmeter - 1200A DC / 1000A AC TRMS
90	90	Auto/ Manual Ranging Digital Clampmeter - 2000A DC / AC TRMS
		Testing & Measuring Instruments - Others
92	93	Insulation Tester - Analog & Digital
94	94	2.5kV - 20GΩ Digital Insulation Tester
95	95	5kV - 200GΩ Digital Insulation Tester
96	97	Phase Sequence Indicators & Motor Rotation Checker
98	99	Leakage Current Testers
100	100	Digital Earth Tester
101	101	H.V. Safety Voltage Detector / Non - Contact Voltage Detector
102	104	Clamp - On Earth / Ground Resistance & Leakage Current Testers
105	106	LCR Meter / Micro - Ohmmeter / Milli - Ohmmeter
107	107	Transformer Turns Ratio Meter
		Automotive Meters & Battery Capacity Testers
110	111	Battery (Load) Meters / Vehicle Battery System Meter
112	112	Vehicle Battery System Meter / Vehicle Battery System Meter with Printer
113	113	Multifunction Automotive Meter / Digital Automotive Multimeter
115	117	Battery Capacity (Impedance) Tester for Batteries upto 500Ah / 1200Ah
		Solar Analyzers
120	121	Solar Module Analyzer (Photovoltaic I-V Curve Tester)
122	125	Solar System Analyzer (Photovoltaic I-V Curve Tester)
126	126	Solar Power Meter
		Environment Testing Instruments
128	129	Infrared Thermometers
130	130	Environment Testing Instruments (Mini Series)
131	131	Temperature & Humidity Meter
132	132	Laser Distance Meter
133	135	Thermal Imaging Cameras
136	136	Digital HVAC Manifold Gauge Meter with Clamp - On Temperature Sensor
137	137	Air Quality Detector
		Power & Harmonics Analyzers
140	142	Power & Harmonics Analyzer
143	143	AC Clamp-On Power & Harmonics Tester
144	145	Clamp-On TRMS Power Meter
146	146	3φ / 1φ Clamp-On TRMS Power Meter for AC / DC Power Measurement
		Calibrating Equipment / CT's / Decade Resistance Box
148	148	Calibrating Equipment - Selection Guide
149	149	Universal Calibrator
150	150	Multifunctional Calibrator
151	151	AC Multifunctional Calibrator
152	152	Multifunction Process Calibrator
153	153	High Voltage Resistance Box
154	154	Clamp-On CT's & Flexible AC Current Probe
155	155	Clamp-On AC Current Transformer

Copyright and Disclaimer
The material presented in this publication is copyright protected ©2020 by M/s. MECO Instruments Pvt. Ltd., Navi Mumbai (India) and may not be reproduced in any form, by any method for any purpose without prior written consent of M/s. MECO Instruments Pvt. Ltd., Navi Mumbai (India). Several of our product designs are registered with THE PATENT OFFICE, Government of India as per the provisions of Designs Act and Design Rules by Controller General of Patents, Designs and Trade Marks. In our endeavor to make better products, the specifications are subject to change. Trade Marks, Logos and References used of various organizations are hereby acknowledged. Subject to Navi Mumbai jurisdiction only.

Chairman & Managing Director

Mr Premchand Goliya

Associated with Professional Bodies / Associations

- **Former President**
  - IEEMA (Indian Electrical & Electronics Manufacturers Association), Mumbai
  - All India Instrument Manufacturers & Dealers Association, Mumbai
  - AOTS Alumni Association of Western India (AAAWI)
- **Former Chairman**
  CI I (Instrumentation Division), N Delhi
- **Member,**
  - Instrument Experts Club, Mumbai
  - Governing Council, Institute for Design of Electrical Measuring Instruments, Mumbai
  - Bureau of Indian Standards, Electrical Instruments Sectional Committee, N Delhi
  - Engineering Export Promotion Council, N Delhi
- **Former Member**
  - R & D Instrumentation Advisory Council Ministry of Science & Technology, New Delhi
  - Development Council Instrument Industry Government of India.
  - Technology Information Forecasting & Assessment Council Government of India.
- **Honoured With Life Time Achievement Award By**
  - Instrumentation Export Club on 7th October, 2017
  - Electronic Maker on 14th September, 2017

Directors

Dr Kamal Goliya (Director & CEO)
Mr Jhanwarlal Sipani (Administration)
Mrs Nandita Goliya (Personnel)
Ms Shivani Goliya (Management Trainee)
Ms Suvarna Goliya (Management Trainee)

Registered Office & Works

Plot No. EL-1, MIDC Electronic Zone, TTC Ind]. Area, Mahape, Navi Mumbai 400 710. (INDIA)
Tel : 0091-22-27673311-16 (Sales), 27673300 (Board)
Fax : 0091-22-27673310, 27673330
Email : info@mecoinst.com Web : www.mecoinst.com

Authorised Service Centres

Navi Mumbai and Bangalore

Year of Establishment

1962

Banker

M/s Canara Bank, Vashi Branch, 195-B Emerald, Next to Neel Siddhi Tower, Sector 12, Vashi, Navi Mumbai - 400703 (India)
A/C : 0110261020612, MICR Code : 400015145

MSME Registration (MICRO Enterprise)

Registration No. 27-021-11-01207 Dt. 28-11-2007
MSME Udyog Aadhaar MH33A0015519

Recogonised In - House R&D Unit

Recognized by Department of Scientific & Industrial Research, Ministry of Science & Technology Government of India, New Delhi
TU/IV-RD/1973/2010 Date 01.04.2016
Renewed upto 31.03.2022

Awards and Certifications

Engineering Export Promotion Council
(Government of India)
Awards For Highest Export Of Panel Instruments
1984-85 1994-95 1995-96 1996-97

EFY'S BEST MULTIMETERS AWARD

BEST CALIBRATING EQUIPMENT AWARD

AUTOMATION'S BEST PROCESS INDICATOR MADE IN INDIA AWARD

BEST MULTIMETERS AWARD

EIL APPROVAL

EEPC AWARD

EEPC APPROVAL

BEST INSULATION TESTER AWARD

BEST DIGITAL CLAMP METER AWARD

BEST ELECTRONIC EARTH RESISTANCE TESTER AWARD

BEST DIGITAL PANEL METER AWARD

Government of Maharashtra
Award in Appreciation of Export Achievement
1999-2000

Registrations

ISO 9001 : 2015
- Certificate No. IND 17.2907U/Q
- Original Approval Date 14.12.2002 - BVQI, London

NSIC Registration No.
PMT : NSIC/GP/MUM/2014/0006119 Date 07.07.2014

GST
27AAACM2883Q1ZU

Permanent Income Tax No. (PAN)
AAA CM 2883 Q

Company's Act
14477 Date 15.12.1969

Factory Act
Thane -2(m)(i)/31/06/31909 Date 29.03.2006

Import Export Code Number
0388036184

Product Profile

PANEL & SWITCHBOARD INSTRUMENTS
- Multifunction Meters
- 1 Phase / 3 Phase Power & Energy Meters
- Appliance Tester
- Power Guard
- VIF / VAF Meters
- Digital Panel Meters and Modules
- Power Line Transducers
- Digital Process Indicator
- Educational Desk Stand Meters
- Analog Panel & Switchboard Meters

TESTING & MEASURING INSTRUMENTS
- Digital Multimeters
- Digital Clampmeters
- Insulation Testers
- LCR Meter
- Clamp-On Earth / Ground Resistance Testers
- Leakage Current Testers Testers
- H.V. Safety Voltage Detectors
- Earth Tester
- Milli Ohm / Micro Ohm Meters
- Transformer Turns Ratio Meter
- Phase Sequence Indicators & Motor Rotation Checker

AUTOMOTIVE METER & BATTERY TESTERS
- Multifunction Automotive Meter
- Battery Capacity Tester / Meter

ENVIRONMENT TESTING INSTRUMENTS
- Laser Distance Meter
- Thermal Imaging Cameras
- Infrared Thermometers
- Air Flow Anemometer
- Lux / Sound Level Meter
- Air Quality Analyzer
- Humidity & Temperature Meters
- HVAC Manifold Meter

POWER & HARMONIC ANALYZERS
- Power & Harmonic Analyzer
- Clamp-On Power &Harmonics Tester
- 3Φ / 1Φ Clamp-On Power Meters
- Clamp-On CT's / Flexible Ct's

CALIBRATING EQUIPMENT
- Universal Calibrator
- Multifunction Calibrator
- AC Multifunctional Power Calibrator
- Multifunctional Process Calibrator
- Standard Current Coil
- H.V. Decade Resistance Box

SOLAR ANALYZER
- Solar Module Analyzer
- Solar System Analyzer
- Solar Power Meter

Dealer Network
More than 60 Authorised Dealers all over India

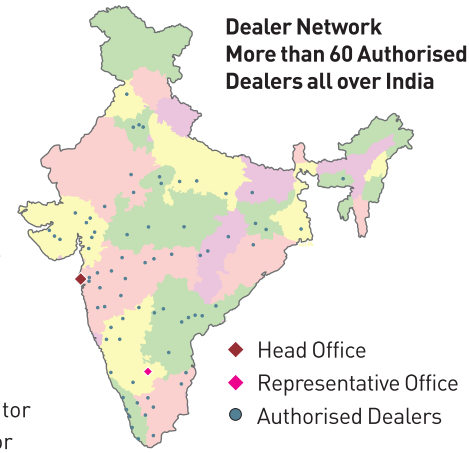

Industry Segments			Exports To Over 30 Countries			
Automobile	Fertilizer	R & D Organization	Bahrain	France	Malaysia	Thailand
Automation	Food Processing	Railway	Bangladesh	Germany	Netherlands	UAE
Aviation	Hotel & Tourism	Rubber & Plastic	Brazil	Greece	Oman	UK
Cement	Mining & Metallurgy	SCADA	Chile	Inodonesia	Philippines	USA
Chemical	Oil / Gas / Petroleum	Sugar & Distilleries	Denmark	Israel	Qatar	Many More ...
Defence	Paper	System Integrators	Egypt	Italy	Saudi Arabia	
Educational Institutions	Pharmaceutical	Telecommunication	Ethiopia	Kenya	Singapore	
EEE Manufacturer	Power Utilities	Textile Plants / Mills	Finland	Kuwait	South Africa	

On Approved List of Major Consultants and Customers

ABB
Airport Authority Of India (AAI)
Amara Raja Group
APGENCO
Areva T & D India Ltd.
Bajaj Auto Limited
BEST
Bharti Airtel Ltd.
BHEL
Blue Star Limited
BPCL
BSNL
Chemtrols
Chloride
CREDA
C&S Group
Dept. Of Automic Energy (BARC)
DMRC
Easun Group
ECIL
EMERSON
GAIL India Limited
GE
GERMI
Godrej & Boyce Group
Grasim Industries Limited
GSEB
Hindalco Industries Limited
Honeywell
HPCL
IBM India Pvt Ltd.
ICICI Bank
IIT
Indian Oil Corporation Limited
Indian Ordance Factory
Indian Railways
ISRO
JIO
JVVNL
Jyoti Ltd
KPCL
KSEB
L&T
Mahanagar Gas Limited
Mahindra & Mahindra Ltd
Maruti Udyog Limited
Ministry Of Defence
MPEB
MRPL
MSEDCL (MAHADISCOM)
MSETCL
MTNL
NPC
NALCO
NFL
NHPC
NIT
NTPC
ONGC
Panasonic Group
PGCIL
Polycab Cable
Popular Switchgear
Raychem RPG Group
RIL
Rockwell Automation
RRVPNL
SAIL
Siemens Limited
SUZLON
Tata Power Limited
TELCO Limited
TISCO Limited
TNEB
TOYOTA Limited
TUV SUD
TVS
UPPCL
Venson
Vikram Sarabhai Space Centre
Visakhapatnam Steel Plant
WIPRO
Yokogawa Limited
Many More...

Product Certifications by Accredited Laboratories

Particulars	Certificate No
Analog Instruments	
Type Test Reports	
• Moving Iron AC Panel Meter - SQ72	ERTL (W)/2002 E & S 294
• Moving Iron AC Volt Meter - SQ96	ERTL (W)/2002 E & S 295
• Moving Coil AC Rectifier Type Meter - MLC96	ERTL (W)/2002 E & S 290
• Moving Coil AC Rectifier Type Meter - C72	ERTL (W)/2002 E & S 288
• Moving Coil AC Rectifier Type Meter - C96	ERTL (W)/2002 E & S 287
• Moving Coil DC Volt Meter - M72	ERTL (W)/2002 E & S 285
• Moving Coil DC Volt Meter - M96	ERTL (W)/2002 E & S 286
• Moving Coil DC Panel Meter - ML96	ERTL (W)/2002 E & S 289
• Electronic Analog Type Watt Meter - 96QW33	ERTL (W)/2002 E & S 291
• Electronic Analog Type Frequency Meter - F96	ERTL (W)/2002 E & S 293
• Electronic Analog Type Power Factor Meter - 96QF31	ERTL (W)/2002 E & S 292
• Electronic Analog Insulation Tester - MC904A-2	ERTL (W)/2004 E & S 284
• Electronic Analog Insulation Tester - MC907A-2	ERTL (W)/2004 E & S 285
EMI and EMC Test Reports	
• Electronic Analog Type Frequency Meter - F72	ERTL (W)/1998 EMI 00088
• Moving Coil AC Rectifier Type Meter - MLC96	ERTL (W)/1998 EMI 00089
• Maximum Demand Ammeter - BM96S	ERTL (W)/1998 EMI 00090
Safety Test Reports	
• Electronic Analog Type Frequency Meter - F72	ERTL (W)/1998 SAF 0046
• Moving Coil AC Rectifier Type Meter - MLC96	ERTL (W)/1998 SAF 0047
• Maximum Demand Ammeter - BM96S	ERTL (W)/1998 SAF 0048
• Moving Coil DC Voltmeter - ML96	TR/ETU022/14-15
Digital Instruments	
Type Test Reports / Calibration Report	
• Digital AC Volt Meter - SMP35S	ERTL (W)/2004 E & S 276
• Digital AC Current Meter - SMP35SRS	ERTL (W)/2004 E & S 277
• Digital DC Volt Meter - SMP35S	ERTL (W)/2004 E & S 282
• Digital Frequency Meter (4 Digit) - FDM3BS	ERTL (W)/2004 E & S 278
• Digital Frequency Meter (5 Digit) - FDM5BS	ERTL (W)/2004 E & S 279
• Digital Power Factor Meter - DPF 31	ERTL (W)/2004 E & S 281
• Digital Watt Meter - DWM9634	ERTL (W)/2004 E & S 280
• Clamp-On TRMS Power Meter - 3510PHW	ERTL (W)/2008 E & S 357
• AC Digital Tong Tester / Clamp-On TRMS Power.hAeter..,3510RHW	TR/ETU229/16-17
• Clamp-On Earth / Ground Resistance & Leakage Current Tester - 4680	ERTL (W)/2003 E & S 258 ERTL (W)/2004 E & S 46
• Digital Insulation Tester - DIT99E	CC/ECU0603/17-18
• Digital Insulation Tester - DIT99C	ERTL (W)/2004 E & S 286
• Digital Insulation Tester - DIT99D	ERTL (W)/2004 E & S 287
• Multifunction Calibrator - 90DQ	CC/ECU1021/08-09
• AC Multifunction Calibrator - 90P	CC/EC U979/09-10
• 4 Digit Frequency Meter	ERTL (W)/2011 E & S 11
EMI and EMC Test Reports	
• Digital Multi Meter - 9A02	ERTL (W)/2002 EMI 150
• Power Line Supervisor / Universal Electrical Analyzer - SPVR-96	ERTL (W)/2002 EMI 147
• Digital Watt Meter - DWM33	ERTL (W)/2002 EMI 148
• Digital AC Current Meter - SMP35SRS	ERTL (W)/2004 EMI 365
• Clamp-On Earth / Ground Resistance & Leakage Current Tester - 4680	ERTL (W)/2004 EMI 234
• Clampmeter Standard Coil with Multifunction Calibrator - Current Coil	CC/ECU01414/17-18
Safety Test Reports	
• Power Line Supervisor / Universal Electrical Analyzer - SPVR-96	ERTL (W)/2002 SAF 46
Power Line Transducers	
Type Test Reports	
• AC Current Transducer - CMT	ERTL (W)/2003 E & S 117
• AC Voltage Transducer - VMT	ERTL (W)/2003 E & 5 26
• Frequency Transducer - FT	ERTL (W)/2003 E & 5 27
• AC Current Transducer (Self Powered) - CMT	ERTL (W)/2004 E & S 283
EMI and EMC Test Reports	
• Active (Watt) Power Transducer - WT34	ERTL (W)/2002 EMI 149
• AC Voltage Transducer - VMT	ERTL (W)/2003 EMI 262
• Frequency Transducer - FT	ERTL (W)/2003 EMI 263
• Current Transducer with 19V to 90V DC Aux. Supply - CMT	ERTL (W)/2003 EMI 324
• Current Transducer with 85V to 265V AC Aux. Supply - CMT	ERTL (W)/2003 EMI 327
• Voltage Transducer with 19V to 90V DC Aux. Supply - VMT	ERTL (W)/2003 EMI 325
• Voltage Transducer with 85V to 265V AC Aux. Supply - VMT	ERTL (W)/2003 EMI 328
• Watt Transducer with 19V to 90V DC Aux. Supply - WT11	ERTL (W)/2003 EMI 326
• Watt Transducer with 85V to 265V AC Aux. Supply - WT11	ERTL (W)/2003 EMI 329
• Current Transducer with Self Powered Aux. Supply - CMT	ERTL (W)/2004 EMI 366
• Current Transducer - CMT	ERTL (W)/2004 EMI 346
• AC Voltage Transducer - VMT	ERTL (W)/2004 EMI 347
• Frequency Transducer - FT	ERTL (W)/2004 EMI 348
• Power Factor Transducer - PFT31	ERTL (W)/2004 EMI 349
• Active Power Transducer - WT33	ERTL (W)/2004 EMI 350
• Reactive Power Transducer - RPT33	ERTL (W)/2004 EMI 351

Quality Control Facilities

For Electrical / Electronic QC

- Fluke 5500A Calibrator
- Fluke 5100B, 5220A (Transconductance Amplifier) AC/DC Calibrator
- Yokogawa 2558 AC STD Source
- Yokogawa 2553, 2563, 2564 DC STD Source
- Yokogawa 2533 AC / DC STD Power Meter
- AC 3 Phase Test Bench
- AC Single Phase Test Bench
- YEW 2793 Decade Resistance Box
- HP 34401A 61/2 Digit Multimeter
- MECO 65P 61/2 Digit Digital Multimeter
- YEW 2885 Standard Watt Convertor
- Ampere (Italy) 3 Phase AC Calibrator Model 74T
- RFL - Phase Generator Model 809
- OSAW Senior Kelvin Double Bridge
- Universal Calibrator MECO 90A
- Multifunctional Calibrator MECO 900Q
- DIT99E
- MECO Standard Ammeter FS 216
- AC Multifunctional Calibrator MECO90P
- Process Calibrator MECO333
- Jigs / Fixtures for PCB Assembly, Calibration & Final Testing
- Resistor Banks for MQ / GQ for Insulation Tester Measurement

For Mechanical (Dimensional) QC

- World class Measuring Instruments & Facility with an In-House Tool Room

For Type Test QC

- Vibration Table
- Life Tester
- High Voltage Tester
- Hair Spring Torque Tester
- Oscilloscopes, DMMs etc.
- Environmental Chamber
- Equipment for Damping Test
- Insulation Tester
- Stereo Microscopes 40X, e-Microscope
- Bursting Strength Machine

Echelon of Standards at MECO (Traceable to NPL Standards)

Acc. \ Para	Resistance	D.C.Volts	D.C.Amps	A.C.Volts	A.C.Amps	Watt	Var	P.F. / φ	Hz	Capacitance	Temperature
0.002%	H.P. 34401A D.M.M.	H.P. 34401A D.M.M.									
0.003%	Fluke 5100B Calibratior										
0.004%		• Fluke 5100B • Fluke 5500A Calibratiors									
0.005%		MECO 65P									
0.006%									H.P. 34401A DMM		
0.008%											
0.01%	• YEW2793 Decade Box • MECO 65P		Fluke 5500A Calibrator						• Ampere 74T Generator Calibrator • MECO 65P		
0.015%			Fluke 5100B Calibrator					MECO90P Calibrator			
0.02%	Chitai Ohmmeter	• YEW 2553 D.C. Voltage Current std • MECO90DQ Calibrator	• YEW 2553 D.C. Voltage Current std • MECO90DQ Calibrator			YEW 2885 Watt Convertor					
0.025%			MECO333 Calibrator								
0.03%		MECO90A Calibrator	MECO90A Calibrator	• Fluke 5500A Calibrator • MECO90P Calibrator	MECO90P Calibrator				• MECO90P Calibrator • MECO333 Calibrator		
0.035%				Fluke 5100B Calibrator							
0.05%	OSAW Senior Kelvin Double Bridge	MECO333 Calibrator	• MECO 65P • HP 34401A	• MECO90A Calibrator • MECO90DQ Calibrator	• Fluke 5100B Cal. • MECO90A Cal. • MECO90DQ Cal.				KDK DPF-30 Phase-freq. Meter		
0.06%					MECO FS216						
0.07%			MECO Shunt 50A/100mV(2mΩ)								
0.08%				YEW 2558 A.C. Volt/Amp. Source	• YEW 2558 A.C. Volt/Amp. Source • Fluke 5100B Calibrator	MECO90P Calibrator	MECO90P Calibrator				
0.1%				• Fluke 8800A DMM • Ampere 74T	• H.P. 34401A DMM • Ampere 74T • MECO 65P	YEW 2533 Power Meter			• MECO90A Calibrator • MECO90DQ Calibrator		• Fluke 5500A Calibrator • MECO333 Calibrator
0.15%		YEW 2563 Voltage Unit									
0.2%	• MECO90A Calibrator • MECO90DQ Calibrator		YEW 2564 Current Unit			• Ampere 74T • Fluke 5500A Calibrator	• Ampere 74T • Fluke 5500A Calibrator	• Ampere 74T • Fluke 5500A Calibrator		Fluke 5500A Calibrator	
0.5%		YEW Analog Meter	YEW Analog Meter	YEW Analog Meter	YEW Analog Meter	YEW Analog Meter		KDK DPF-30 RFL 809			
1.0%										Balcon Decade Cap. Box	
3.0%	2000MΩ/1000V DIT99E										

Plant & Machinery

- BFW Milling Machine with 3 axis DRO
- Kirloskar Lathe Machine
- Batliboi Shaping Machine
- Radial Drilling Machine
- Drilling Machines 13mm
- Tapping Machines 6.5mm
- Bench Grinder
- Pentograph
- Tool Bit Grinder
- Tanabe (Japan) Coil Winding Machines
- JANOME Desktop Robot with Screw

Feeder - JRV 2303

- Industrial oven for Burn-In/Aeging Test/Burn-in Chamber
- Automatic Transformer Test System
- Magnetisers
- Impulse Magnetiser
- Utrasonic Cleaner
- Oil Dispenser
- MECO DC regulated Power Supply cum Rectifier Unit
- Moulding Machine
- ETA Solder Paste Printer
- JUKI SMT Placement Machine - JY 350
- ETA REFLOW Machine - T600A
- Air Compressors
- In House CAD Facility
- Dial Designer
- Belt Conveyor System
- Box Strapping Machine
- Plastic Scrap Grinding Machine
- Slitting Machine
- Dial Printing Machine
- Pad Printing Machine

Customer Approvals / Appreciation

ಭಾರತ್ ಹೆವಿ ಎಲೆಕ್ಟ್ರಿಕಲ್ಸ್ ಲಿಮಿಟೆಡ್
भारत हेवी इलेक्ट्रिकल्स लिमिटेड
Bharat Heavy Electricals Ltd
(A Government of India Undertaking)
ELECTRONICS DIVISION
P.B. No 2606, MYSORE ROAD, BANGALORE - 560 026. INDIA

PHONE : +918026998443
dharmaraju@bheledn.co.in

An ISO 9001, ISO 14001 & OHSAS 18001 COMPANY

Date : 12th Dec 2012

To Whomsoever It May Concern

This is to certify that M/s Meco Instruments Pvt Ltd., TTC Industrial Area, Mahape, Navi Mumbai– 400710 is registered with our unit of BHEL vide vendor code: M402467.

The supplier is registered for the supply of following material categories:

- *Measuring Instruments such as Voltmeters, Ammeters, Wattmeters, Frequency Meters, PF Meters (Both Analog & Digital), and*
- *Indicators*

Type of Registration: Permanent.

12/12/2013
(BK Dharmaraju)
Dy General Manager (Supplier Devpt Cell)

DHARMARAJU B K, Dy. GENERAL MANAGER/ENGG SERVICES CE
BHEL-EDN. MYSORE ROAD, BANGALORE - 560 026

Visit us at www.bhel.com www.bheledn.com

ABB

Certificate of Appreciation

This is in appreciation towards the contribution of **M/s Meco Instruments Pvt. Ltd.** to **ABB Ltd., LV- Drives** for adopting good quality systems in meeting ABB business growth during the years 2006 & 2007.

GNV Subba Rao
Business Head
Drives - ABB Ltd.

BLUE STAR

Blue Star Limited
2nd Pokhran Road, Manpada,
Thane (West) 400 601, India
Tel : +91 22 6792 4000
Fax : +91 22 6792 4020
www.bluestarindia.com

November 25, 2015

To,
Meco Instruments Pvt Ltd
E1-1, MIDC, Electronics Zone
Mahape
Navi Mumbai

Attention : **Mr. Kamal Goliya**

Dear Sir,

We are glad to inform you that we are very much satisfied with the performance of your **"Single Phase Multifunction Meter - TRMS"**, which have been installed at our various sales outlets.

Kudos to the entire team.

We hope to have good and strong business relationship with you in future as well.

Best Regards,

Mahesh Karlekar
General Manager
SCM & Procurement

Registered Office: Kasturi Buildings, Mohan T Advani Chowk, Jamshedji Tata Road, Mumbai-400 020, India. Tel +91 22 6665 4000 Fax : +91 22 6665 4152
CIN L29120MH1949PLC006970

---

14 DEC 2015

SECURENS™
Prevent crime before it happens

Date: 7 December 2015

To,
Mr. Premchand Goliya – C.M.D.
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710

Dear Sir,

Sub : Testimonial for Supply of MECO Multifunction Meter (Energy Modules) Model MFM96S-ICICI for CMS Project of ICICI Bank Branch on Pan India basis.

Ref : PO No./15-16/0121 Dt. 22/06/2015 Supply of MECO-MFM96S–ICICI Qty. 500 Nos.

Refer our above Purchase order for Supply of MECO Make Multifunction Meter (Energy Modules) Model MFM96S-ICICI for CMS Project of ICICI Bank Branch on Pan India basis.

We like to inform you that M/s. MECO Instruments Pvt. Ltd. has executed the above purchase order satisfactory as per delivery schedule given by us.

We are already in process of Installing of MECO Make MFM-96S Meter (Energy Module) in MFM Panel at our customer' difference sites. We find MECO Multifunction Meter (Energy Modules) Model MFM96S-ICICI & MECO-V Make Current Transformer is working satisfactory where ever it has been installed.

We also appreciate Mr. Haren Shah for extending his timely service and support and sincerer effort during Training, Installation & Commissioning of MFM Panel several times.

We look forward to have similar kind of support from MECO Team member in future as and when require.

Thanking You,

Your Faithfully,

Kalpana Mane
Head – Purchases
Securens Systems Pvt. Ltd.

Member of CSAA
Certified with

Securens Systems Pvt. Ltd.
3rd floor, B-Wing, Greenscape Technocity, Plot No. X-4/1 & X-4/2, Mahape, Navi Mumbai - 400 701
+91 22 6179 9400 www.securens.in CIN-U74999MH2011PTC225609

MECO®

SINCE 1962

Multifunction Meters

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

3 Phase Multifunction Meters - Selection Guide

FEATURES / PARAMETERS		MFM-96AFN	MFT-96AFN DIN RAIL	MFM-96S	SPVR-96S	MFM Din Rail	MFM-96AF
TRMS Measurement		✓	✓	✓	✓	✓	✓
Display	LED- Super Bright	✓	✓	✓	-	-	✓
	LCD- With Backlight	-	-	-	✓	✓	-
Communication	RS 485 MODBUS, 5KV Isolated Port	✓	✓	✓	✓	✓	✓
System	1 Phase 2 Wire System	✓	✓	-	-	-	-
	3 Phase 3 Wire System	✓	✓	✓	✓	✓	✓
	3 Phase 4 Wire System (Balanced / Unbalanced)	✓	✓	✓	✓	✓	✓
Aux. Supply	85-265V AC / DC (Standard)	✓	✓	✓	✓	-	✓
	19 - 90V AC / DC (Optional)	✓	✓	✓	✓	✓	✓
Current	I1, I2, I3, I Average	✓	✓	✓	✓	✓	✓
	I12 , I31, I Average	✓	✓	✓	✓	✓	✓
	Neutral Current	✓	✓	-	-	-	✓
Voltage	V1N, V2N, V3N, V Average	✓	✓	✓	✓	✓	✓
	V12, V23, V31, V Average	✓	✓	-	✓	✓	✓
	V12, V31, V Average	✓	✓	✓	✓	✓	✓
Frequency	Hz	✓	✓	✓	✓	✓	✓
Active Power	W1, W2, W3, W System	✓	✓	✓	✓	✓	✓
Reactive Power	Var1, Var2, Var3, Var System	✓	✓	✓	✓	✓	✓
Apparent Power	VA1, VA2, VA3, VA System	✓	✓	✓	✓	✓	✓
Power Factor	PF1, PF2, PF3, PF System	✓	✓	✓	✓	✓	✓
Active Energy	KWh1, KWh2, KWh3, KWh Total (Import)	✓	✓	✓	✓	✓	✓
	KWh1, KWh2, KWh3, KWh Total (Export)	✓	✓	✓	✓	✓	✓
Reactive Energy	KVARh1, KVARh2, KVARh3, KVARh Total (Ind.)	✓	✓	✓	✓	✓	✓
	KVARh1, KVARh2, KVARh3, KVARh Total (Cap.)	✓	✓	✓	✓	✓	✓
Apparent Energy	KVAh1, KVAh2, KVAh3, KVAh Total	✓	✓	✓	✓	✓	✓
Previous Energy	Active (Import / Export)	✓	✓	-	-	-	✓
	Reactive (Ind. / Cap.)	✓	✓	-	-	-	✓
	Apparent	✓	✓	-	-	-	✓
Energy Retention & Reset		✓	✓	✓	✓	✓	✓
MAX. Demand	KW System / KVA System	✓	✓	-	-	-	✓
THD	V1, V2, V3, I1, I2, I3	✓	✓	-	-	-	✓
Scroll - Auto / Manual		✓	✓	✓	✓	✓	✓
Password Protection		✓	✓	✓	✓	✓	✓
CTR / PTR Primary & Secondary Programmable		✓	✓	-	-	-	-
Baud Rate	2.4 - 19.2 kbps	✓	✓	-	-	-	-
	9.6 kbps	✓	✓	✓	✓	✓	✓
Inbuilt Memory to Programme, Store And Reset For	CTR	-	-	✓	✓	✓	✓
	PTR	-	-	✓	✓	✓	✓
	Instrument Address	✓	✓	✓	✓	✓	✓
	MD Period	✓	✓	-	-	-	✓
	Password	✓	✓	✓	✓	✓	✓
Phase Angle	R, Y, B	✓	✓	-	-	-	✓
Phasor Angle	RY, YB, BR	✓	✓	-	-	-	✓
RUN Hour	Import	✓	✓	-	-	-	✓
	Export	✓	✓	-	-	-	✓
	Total (Import + Export)	✓	✓	-	-	-	✓
ON Hours		✓	✓	-	-	-	✓
Voltage	Min. Value, Max Value	✓	✓	-	-	-	✓
Current	Min. Value, Max Value	✓	✓	-	-	-	✓

3 Phase VAF / VIF Meter - TRMS

CE

Micro Controller Based

VIF96U

Features

- TRMS Measurement
- Measures V, A, Hz, Run Hour, ON Hour & RPM
- RUN Hour / ON Hour (Max. 99999 Hours, 59 Minutes, 59 Second)
- RUN Hour / ON Hour Reset Facility
- Auto Scroll / Manual Scroll Display
- 3 Phase 4 wire
- 3 Rows of 3 Digits Super Bright Red LED Display
- Programmable CTR, PTR, Number of Pole Setting
- Auto Indication for 'KV' & 'KA'
- Auto Selection of Decimal Point

Parameters Measured	Accuracy ±(%FS)	Phase	System
Voltage	± 0.5%	V_{RN}, V_{YN}, V_{BN}, V_{RY}, V_{YB}, V_{BR}	V (System)
Current	± 0.5%	I_R, I_Y, I_B	I (Average)
Frequency	± 0.2 Hz	NA	Hz (System)
RPM	± 0.5%	NA	RPM (System)
RUN Hour	NA	NA	RUN Hour (System)
ON Hour	NA	NA	ON Hour (System)

Specifications

Display	3 Rows of 3 Digit RED Seven Segment Display 0.56" / 14.2mm Digit Height		Voltage Input	< 0.2 VA / Phase
			Current Input	< 0.2 VA / Phase
Auxiliary Supply	85 - 265 V AC/DC (SMPS)		System	3 Phase 3 Element 4Wire
	19 - 90 V AC/DC (SMPS) (Under Development)		Standard	
			Installation Category	Cat II (IEC / EN61010 - 1)
Input Voltage	51 - 300 V AC (Max.) (PH - N)	Any one	Pollution	Degree 2 (IEC / EN61010 - 1)
	21 - 150 V AC (Max.) (PH - N)		Environment	
	88 - 519 V AC (Max.) (PH - PH)	Any one	Calibration	27°C ± 5°C
	36 - 258 V AC (Max.) (PH - PH)		Operating	0 to 50°C, RH < 70%
Input Current	0.5 A to 6 A (Max.) For 5A Meter	Any one	Storage	-10 to 60°C, RH < 70%
	0.1 A to 1.2 A (Max.) For 1A Meter		Dimensions (mm)	
Frequency	45 - 55 Hz		Front	96 x 96 mm
RPM	As per Number of Pole Setting. Fully Programmable (1 - 255)		Depth (Behind Bezel)	43 mm
			Panel Cutout	92 (+0.8, - 0.0) x 92 (+0.8, - 0.0)
VA Burden (Typical)			Dielectric Strength	2.5 KV at 50 Hz for 1 min
Auxiliary	< 2.5 VA		Insulation Resistance	> 20 MOhms at 500 V DC

Ordering Information : Model, Input Voltage, Input Current, Input Frequency, System 3P3E4W & Auxiliary Supply

Terminal Connection

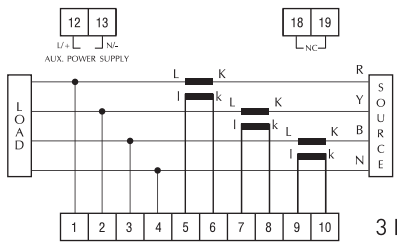

3 Phase 3 Element 4 Wire

3 Phase Multifunction Power & Energy Meter / Power Line Supervisor - TRMS

SOFTWARE

CE

RS 485

Micro Controller Based



MFM-96S



SPVR-96S

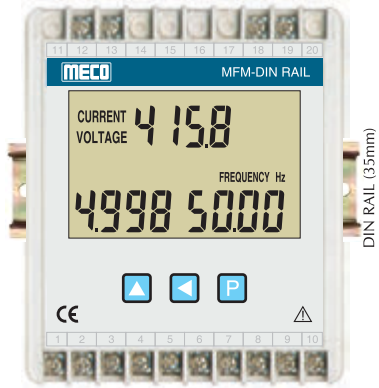

MFM-DIN RAIL

Features

- 10 Parameters, 48 Values on 16 Pages (MFM-96S)
- 10 Parameters, 50 Values on 34 Pages (SPVR-96S & MFM-DIN RAIL)
- TRMS Measurement
- 3 Phase 3 Wire / 3 Phase 4 Wire (User Selectable)
- CTR, PTR, Inst. Address, Password & Energy Reset (Programmble)
- Energy Import - Export (4 Quadrant Operation)
- POWER MASTER Software (Optional)
- RS485 Port, 5KV Isolated with MODBUS RTU Protocol (Optional)
- CE Compliance as per EN61010-1, EN61326-1
- Inbuilt Memory to Store CTR, PTR, Inst. Address & Password
- Auto / Manual Scroll Display (Programmble)
- Energy Retention
- Energy Reset Programmable Parameters (Password Protected)

Parameters Measured	Accuracy ±(%FS)	Phase	System
Voltage	± 0.5%	V1N, V2N, V3N, V12, V23, V31	V (System)
Current	± 0.5%	I1, I2, I3	I (Average)
Active Power	± 1.0%	W1, W2, W3	W (System)
Reactive Power	± 1.0%	Var1, Var2, Var3	Var (System)
Apparent Power	± 1.0%	VA1, VA2, VA3	VA (System)
Frequency	± 0.2 Hz	NA	Hz (System)
Power Factor	± 1° Electrical	PF1, PF2, PF3	PF (System)
Active Energy	Class 1	KWh1, KWh2, KWh3	Kwh Total (Import) & Kwh Total (Export)
Reactive Energy		KVarh1, KVarh2, KVarh3	KVarh Total (IND.) & KVarh Total (CAP.)
Apparent Energy		KVAh1, KVAh2, KVAh3	KVAh Total

Specifications

Auxiliary Supply	85 - 265VAC / DC (Standard)	
	19 - 90VAC / DC (Optional)	
Voltage / Phase	51 - 300VAC (Max.) (PH-N)	Any one
	16 - 138VAC (Max.) (PH-N)	
	88 - 519VAC (Max.) (PH-PH)	Any one
	28 - 239VAC (Max.) (PH-PH)	
Current / Phase	0.03A to 1.2A (Max.)	Any one
	0.110A to 6A (Max.)	
Frequency	45 - 55Hz	
Power Factor	0.300 Lag (L) - 1.000 - 0.300 Lead (C)	
VA Burden (Typical)		
Auxiliary	< 3 VA	
Voltage I / P	< 0.3 VA / Phase	

Current I/P	< 0.2 VA / Phase
System	3P2E3W / 3P3E4W (User Selectable)
Standard	
Installation Category	CAT II (IEC / EN61010 - 1)
Pollution	Degree 2 (IEC / EN61010 - 1)
Environment	
Calibration	27°C ±5°C
Operating	0 to 50°C , RH < 70%
Storage	-10 to 60°C , RH < 70%
Terminal Block	Screw Type
Dielectric Strength	2.5KV at 50 Hz for 1 min.
Insulation Resistance	> 20 MOhms at 500VDC

* Dimension (mm)

Model	MFM-96S / SPVR-96S	MFM-DIN RAIL
Front	96 x 96	115 (L) x 96(W) x 60(D)
Depth (Behind Bezel panel)	43	
Cut - out	$92^{(+0.8,-0.0)}$ x $92^{(+0.8,-0.0)}$	
Case / Housing Material	DIN Black ABS, Dimension as per DIN 43700	ABS Gray
Mounting	Panel	DIN RAIL (35mm)
Mounting Clamps	Sturdy, Moulded Derlin with Suitable Hardware	
Terminals / Connectors	Terminal Block : Thermo Plastic (UL94V-0) with Tin Plated Brass Terminal	

Terminal Connection



3 Phase 3 Element 4 Wire

SPVR-96S
MFM-96S



3 Phase 2 Element 3 Wire



3 Phase 3 Element 4 Wire

MFM-DIN RAIL



3 Phase 2 Element 3 Wire

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, System 3P3E4W / 3P2E3W, CTR / PTR (if any), Auxiliary Supply & RS485 MODBUS Communication Port (Optional)

RS485 - RS232 Converter

Features

- Half Duplex Transreceivers
- Data Transmission up to 1Mbps
- Compliance to TIA / EIA-485A Standard
- Allowing up to 32 Nodes on a Single Bus
- 5KV Isolation
- LED for Indicating RX / TX Data Flow
- Built in Power Supply

Application

- Energy Meter
- Industrial Automation
- Modem & Computers
- Telecommunication Equipment

Ordering Information : Model

Technical Specification

Model	RS485 - RS232 Converter	
Power Supply	85 - 265 V AC/DC	
Auxiliary (VA Burden)	< 2.5VA (Typical)	
Environment	Operating	0 to 60°C, RH < 70%
	Calibration	27°C ±5°C
	Storage	-10 to 60°C, RH < 70%
Standard	TIA / EIA-485A	
Dimensions (mm)	85 x 60 x 38mm	

Terminal Connection

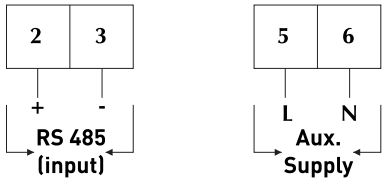

9DB Connector



RS 232
(Output)

POWER MASTER Software

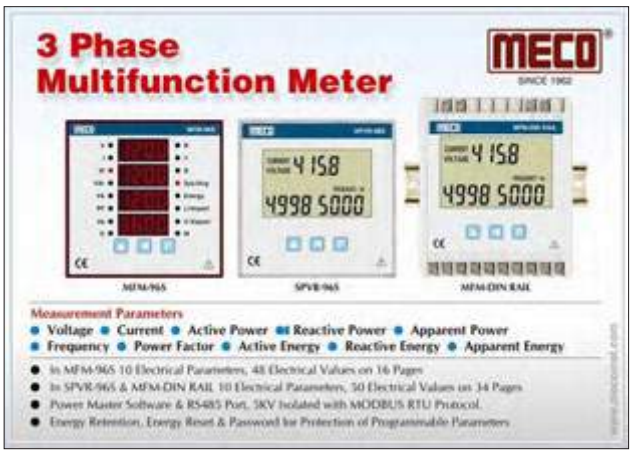

REAL TIME DISPLAY



GRAPH DISPLAY

HISTORY TREND

REPORT VIEW DISPLAY

1 Phase & 3 Phase Multifunction Power & Energy Meter / Transducer with M.D. & T.H.D. - TRMS with RS-485 Communication

Micro Controller Based

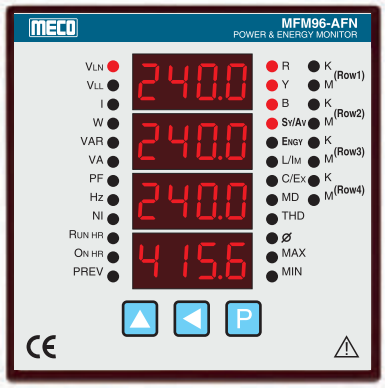

MFM-96AFN

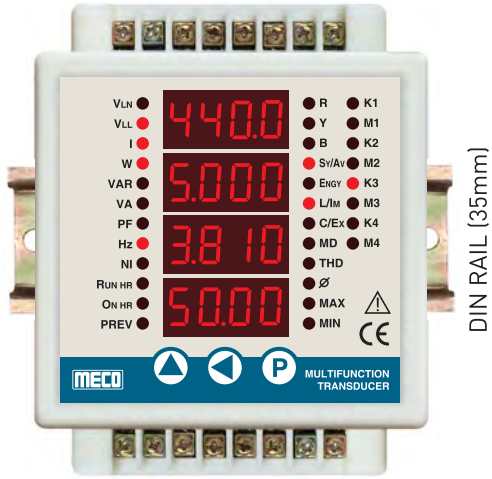

MFT-96AFN DIN RAIL

Features

- TRMS Measurement
- 23 Parameters on 46 Pages
- 4 Rows of 4 Digit Super Bright RED LED Display
- 1 Phase 2 Wire / 3 Phase 3 Wire / 3 Phase 4 Wire System (User Programmable)
- CT/PT Primary & Secondary Programmable
- Programable CT, PT, Instrument Address, Password & MD Period
- Inbuilt Memory to Store CT, PT, Instrument Address, Password & MD period
- Display Digit Height 0.36" / 9.2mm
- Energy Import-Export (4 Quadrant Operation)
- POWER MASTER Software (Optional)
- RS485 Port, 5KV Isolated with MODBUS RTU Protocol (Optional)
- CE Compliance with EN61010-1, EN61326-1
- Baud Rate (2.4-19.2kbps)
- Auto Scroll (5 sec.) / Manual Scroll Display
- Built in 20 Energy Meters of 8 Digit Resolution
- Energy Retention & Password Protected Energy Reset Facility
- Max. Demand for KW and KVA with user Selectable Demand Interval 5-30 Minutes
- THD for Voltage & Current (1 to 63 Order)
- Password for Protection of Programmable Parameters
- RUN Hours, ON Hours (9999 9999 9999 :59:59)
- Phase Angle & Phasor Angle Measurement
- Display Previous Energies
- Set Date & Time
- Measurement of Min. & Max. Voltage & Current Values
- Sleep Mode for the Display

Specifications

Parameters Measured	Accuracy (%)±(FS +5Digit)	Phase	System
Voltage	0.2	V1N, V2N, V3N, V12, V23, V31	V (System)
Current		I1, I2, I3, NI	I (Average)
Active Power	0.5	W1, W2, W3	W (System)
Reactive Power		Var1, Var2, Var3	Var (System)
Apparent Power		VA1, VA2, VA3	VA (System)
Maximum Demand	0.5	W1, W2, W3, VA1, VA2, VA3	W (System), VA (System)
Harmonic Distortion (1-63) THD (upto 63rd Order)	5	RVH1-63, YVH1-63, BVH1-63 (38-300V AC) RIH1-63, YIH1-63, BIH1-63 (1.5 - 6A AC)	THD - V, THD - I
Frequency	± 0.2 Hz	NA	Hz (System)
Power Factor	± 1^0 Electrical	PF1, PF2, PF3	PF (System)
Active Energy	0.5	KWh1, KWh2, KWh3	KWh Total (Import), KWh Total (Export)
Reactive Energy		KVarh1, KVarh2, KVarh3	KVarh Total (Ind.), KVarh Total (Cap.)
Apparent Energy		KVAh1, KVAh2, KVAh3	KVAh Total
Phase Angle	NA	V1V2, V1V3, V1I1, V2I2, V3I3	NA

Specifications

Display	Simultaneous Display of 4 Parameters, 4 Digits Resolution, 0.36" / 9.2mm Digit Height	
Auxiliary Supply	85 - 265V AC / DC (Standard) @ 50/60Hz	
	19 - 90V AC / DC (Optional) @ 50/60Hz	
Input		
Voltage / Phase	26 - 520VAC (Max.) PH-PH	Programmable
	15 - 300VAC (Max.) PH-N	
Current / Phase	0.150A - 1.2A (Max.) for 1A AC	
	0.250A - 6.0A (Max.) for 5A AC	
Frequency	45 - 65 Hz	
Power Factor	0.300 Lag (L) - 1 .000 - 0.300 Lead (C)	
VA Burden (Typical)		
Auxiliary	<1.5VA	
Voltage Input	<0.3VA / Phase	
Current Input	<0.2VA / Phase	

System	1P1E2W / 3P2E3W / 3P3E4W	
Standard		
Installation Category	Cat II (IEC / EN61010-1)	
Pollution	Degree 2 (IEC / EN61010-1)	
Environment		
Calibration	27°C ± 5°C	
Operating	0 to 50°C, RH < 70%	
Storage	-10 to 60°C, RH < 70%	
Terminal Block	Plug in type	
Dimensions (mm)	**Panel Mount**	**DIN Rail**
Front	96 x 96mm	96 x 120mm
Depth (Behind Bezel)	90mm	93mm
Panel Cut-Out / Mounting	$92^{(+0.8, -0.0)}$ x $92^{(+0.8, -0.0)}$	35mm DIN Rail
Dielectric Strength	2.5kV at 50Hz for 1min.	
Insulation Resistance	>20MOhms at 500V DC	

Ordering Information : Model, Input Voltage, Input Current, Input Frequency, Auxiliary Supply and RS485 MODBUS Communication (Optional)

Terminal Connection

MFT-96AFN DIN RAIL



1 Phase 1 Element 2 Wire



3 Phase 2 Element 3 Wire



3 Phase 3 Element 4 Wire

MFM-96AFN

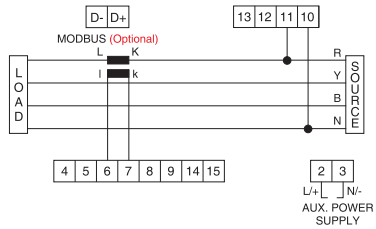

1 Phase 1 Element 2 Wire

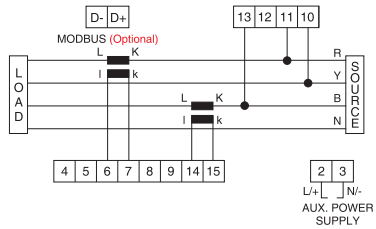

3 Phase 2 Element 3 Wire

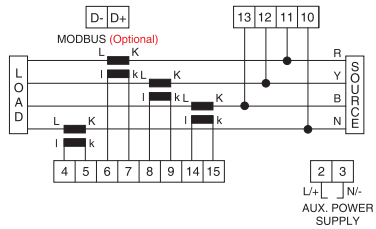

3 Phase 3 Element 4 Wire

3 Phase Multifunction Power & Energy Meter with M.D. & T.H.D. - TRMS

new

SOFTWARE

CE

RS 485

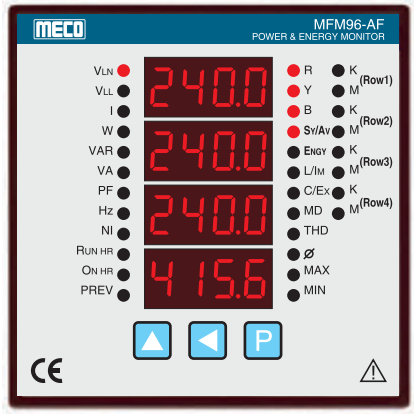

MFM-96AF

Micro Controller Based

- Energy Import-Export (4 Quadrant Operation)
- POWER MASTER Software (Optional)
- RS485 Port, 5KV Isolated with MODBUS RTU Protocol (Optional)
- CE Compliance with EN61010-1, EN61326-1
- Inbuilt Memory to Store CTR, PTR, Instrument Address, Password & MD period
- Auto Scroll (5 sec.) / Manual Scroll Display
- Built in 20 Energy Meters of 8 Digit Resolution
- Energy Retention & Password Protected Energy Reset Facility
- Max. Demand for KW or KVA with user Selectable Demand Interval 5-30 Minutes
- THD for Voltage & Current
- Password for Protection of Programmable Parameters
- RUN Hours, ON Hours
- Phase Angle & Phasor Angle Measurement
- Display Previous Energies
- Set Date & Time
- Measurement of Min. & Max. Voltage & Current Values

Features

- TRMS Measurement
- 23 Parameters on 46 Pages
- 4 Rows of 4 Digit Super Bright RED LED Display
- 3 Phase 3 Wire / 3 Phase 4 Wire System (User Selectable)
- Programable CTR, PTR, Instrument Address, Password & MD Period

Parameters Measured	Accuracy ±(FS +5Digit)	Phase	System
Voltage	± 0.5%	V1N, V2N, V3N, V12, V23, V31	V (System)
Current		I1, I2, I3, NI	I (Average)
Active Power	± 1%	W1, W2, W3	W (System)
Reactive Power		Var1, Var2, Var3	Var (System)
Apparent Power		VA1, VA2, VA3	VA (System)
Maximum Demand	± 0.5%	W1, W2, W3, VA1, VA2, VA3	W (System), VA (System)
THD	± 5%	V1, V2, V3, I1, I2, I3	NA
Frequency	± 0.2 Hz	NA	Hz (System)
Power Factor	± 1^0 Electrical	PF1, PF2, PF3	PF (System)
Active Energy	Class 1	KWh1, KWh2, KWh3	KWh Total (Import), KWh Total (Export)
Reactive Energy		KVarh1, KVarh2, KVarh3	KVarh Total (Ind.), KVarh Total (Cap.)
Apparent Energy		KVAh1, KVAh2, KVAh3	KVAh Total
Phase Angle	NA	V1V2, V1V3, V1I1, V2I2, V3I3	NA

Specifications

Display	Simultaneous Display of 4 Parameters, 4 Digits Resolution, 0.36" / 9.2mm Digit Height		Current Input	<0.2VA / Phase
			System	3P2E3W / 3P3E4W
			Standard	
Auxiliary Supply	85 - 265V AC / DC, Optional : 19 - 90V AC / DC		Installation Category	Cat II (IEC / EN61010-1)
Input			Pollution	Degree 2 (IEC / EN61010-1)
Voltage/Phase	51 - 300VAC (Max.) PH-N	Any one	**Environment**	
	17 - 138VAC (Max.) PH-N		Calibration	27°C ± 5°C
	88 - 519VAC (Max.) PH-PH	Any one	Operating	0 to 50°C, RH < 70%
	30 - 239VAC (Max.) PH-PH		Storage	-10 to 60°C, RH < 70%
Current/Phase	0.050A to 1.2A (Max.)	Any one	**Terminal Block**	Plug in type
	0.250A to 6A (Max.)		**Dimensions (mm)**	
Frequency	45 - 65 Hz		Front	96 x 96mm
Power Factor	0.300 Lag (L) - 1 .000 - 0.300 Lead (C)		Depth (Behind Bezel)	90mm
VA Burden (Typical)			Panel Cut-Out	$92^{(+0.8, -0.0)}$ x $92^{(+0.8, -0.0)}$
Auxiliary	<2.5VA		**Dielectric Strength**	2.5kV at 50Hz for 1 min.
Voltage Input	<0.3VA / Phase		**Insulation Resistance**	>20MOhms at 500V DC

Ordering Information : Model, Input Voltage, Input Current, Input Frequency and RS485 MODBUS Communication (Optional)

Terminal Connection

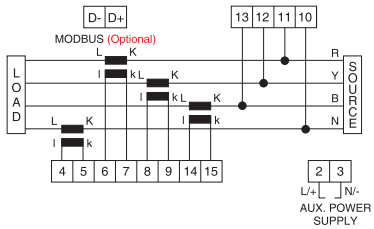

3 Phase 3 Element 4 Wire

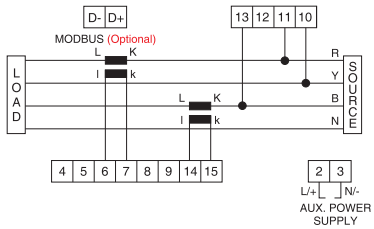

3 Phase 2 Element 3 Wire

1 Phase Multifunction Meters - Selection Guide

FEATURES / PARAMETERS		EM-08S (1A/5A AC)	EM-09 (1A/5A/ 20A AC)	EM-08/ EM-08D (1A/5A AC)	PG-09 (1A/5A/ 20A AC)	PG-08T (10A AC)
TRMS MEASUREMENT		✓	✓	✓	✓	✓ (For Sine Wave)
DISPLAY	LCD (With Backlight)	✓	✓	✓	✓	✓
COMMUNICATION	RS 485 MODBUS, 5KV Isolated Port	✓ (Optional)	✓ (Optional)	-	-	-
SYSTEM	1 Phase	✓	✓	✓	✓	✓
AUX. SUPPLY	230V AC	-	-	✓	✓	✓
	SMPS (85-265V AC/DC)	✓	✓	-	-	-
CURRENT	I	✓	✓	✓	✓	✓
VOLTAGE	V (P-N)	✓	✓	✓	✓	✓
FREQUENCY	Hz	✓	✓	✓	✓	✓
ACTIVE POWER	W / KW	✓	✓	✓	✓	✓
REACTIVE POWER	Var / KVar	✓	✓	✓	✓	-
APPARENT POWER	VA / KVA	✓	✓	✓	✓	-
POWER FACTOR	PF	✓	✓	✓	✓	✓
ACTIVE ENERGY	KWh (Import)	✓	✓	✓	✓	✓
REACTIVE ENERGY	KVARh (Ind)	✓	✓	✓	-	-
APPARENT ENERGY	KVAh	✓	✓	✓	-	-
CO_2	KG	-	-	-	✓	✓
TUT	HOUR / MIN	-	-	-	✓	✓
MONEY	CU	-	-	-	-	✓
TARIFF	CU / KWh	-	-	-	-	✓
TIMER & RELAY	-	-	-	-	-	✓
ENERGY RETENTION & RESET		✓	✓	✓	✓	✓
AUTO SCROLLING		✓	✓	✓	-	-
MANUAL SCROLLING		✓	✓	✓	✓	✓
INBUILT MEMORY TO PROGRAM, STORE AND RESET FOR	CTR	✓	-	✓	-	-
	INSTRUMENT ADDRESS	✓	✓	-	-	-

1 Phase Multifunction Meter - TRMS

CE

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

EM-08(5A)
EM-08(1A)

EM-08D(5A)
EM-08D(1A)

Micro Controller Based

Features

- 10 Parameters on 10 Display Pages
- Measures V, A, PF, Hz, KW, KVA, KVAr, KWh, KVAh & KVArh
- Auto / Manual Scroll Display (User Selectable)
- Reduces Panel Space and Wiring Time
- State of The Art Microcontroller Design
- TRMS Measurement
- Ideal for Testing of Electrical Appliances
- User Programmable CT Ratio (1.00 - 99.99)
- LCD Display with Backlight (20mm Digit Height)

Application

● Appliance Testing ● Energy Audit ● QC ● Studying Energy Efficiency of Electrical Equipment ● Building Management Systems ● Power Management ● Generator / Motor Characteristics ● Plant Maintenance

Specification

Functions	EM-08/EM-08D(5A)	EM-08/EM-08D(1A)	Accuracy
RMS Voltage	**50.0 ~ 300 Vrms**		±(0.5% FS +1 dgt.)
RMS Current (any one range only)	(0.25 ~ 6.0 Arms)	(0.05 ~ 1.2 Arms)	±(0.5% FS +1 dgt.)
Active Power	0.012 ~ 1.800 KW	0.002 ~ 0.360 KW	±(0.5% FS +1 dgt.) [Cosφ=0.3 to 1.000]
Apparent Power	0.012 ~ 1.800 KVA	0.002 ~ 0.360 KVA	±(0.5% FS +1 dgt.)
Reactive Power	0.012 ~ 1.800 KVAr	0.002 ~ 0.360 KVAr	±(1.0% FS +1 dgt.) [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead		±(0.01 PF +1 dgt.)
Line Frequency	45.00 ~ 65.00 Hz		±0.1 Hz
Active Energy (KWh)	0000 ~ 9999 KWh		Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh		
Reactive Energy (KVArh)	0000 ~ 9999 KVArh		

Model		EM08	EM08D
Case / Housing Material		DIN Black ABS, Dimension as per DIN 43700	Portable Type, Desk Top Case with Tilt Stand
Mounting Clamps		Sturdy, Moulded Derlin with suitable Hardware	Desk Top Type
Terminals / Connectors		Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal	For Input connections 10Amps Binding Post Terminals on the Front panel.
Auxiliary Power Supply		230VAC ±20%, 50Hz	230VAC ±20% 50Hz, Switch & Fuse for Aux. Supply at the Back, Supplied with 1-Phase Power Cord
Dimension (mm)	**Front**	96 x 96	160 (W) x 110 (H) x 190 (D)
	Depth (Behind Bezel Panel)	90	
	Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	

Ordering Information: Model, Input Voltage, Input Current (1A or 5A - any one only), CTR & Auxillary Supply

Connection Diagram

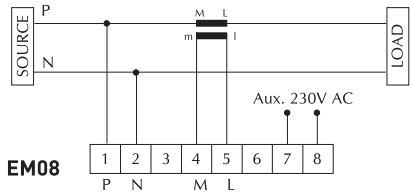

EM08

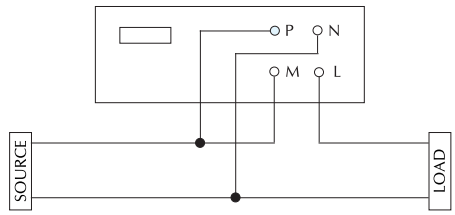

EM08D

1 Phase Multifunction Meter - TRMS with RS-485 Port

SOFTWARE

CE

RS 485

EM-08S (5A)
EM-08S (1A)

Micro Controller Based

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

Features

- 10 Parameters on 10 Display Pages
- Measures V, A, PF, Hz, KW, KVA, KVAr, KWh, KVAh & KVArh
- Auto / Manual Scroll Display (User selectable)
- SMPS Power Supply (85 - 265VAC/DC)
- Ideal for Testing of Electrial Appliances
- User Programmable CT Ratio (1.00 - 99.99) for EM-08S (1A/5A)
- TRMS Measurement
- 4 Digit LCD Display with Backlight (20mm Digit Height) LED Indicator for Parameter Indication
- RS 485 Port (5KV Isolated) (Optional)
- MODBUS RTU Protocol (Optional)
- POWER MASTER Software (Optional)

Application

- Home Appliance Testing
- Energy Audit
- QC
- Studying Energy Efficiency of Electrical Equipement
- Building Management - Systems
- Power Management
- Generator/ Motor Characteristics
- Plant - Maintenance

Specification

Functions	EM-08S (5A)	EM-08S (1A)	Accuracy
RMS Voltage	50.0 ~ 300Vrms		±(0.5% FS +1 dgt.)
RMS Current (Any One Range Only)	(0.125A ~ 6.0Arms)	(0.025A ~ 1.2Arms)	
Active Power	0.030 ~ 1.800 KW	0.006 ~ 0.360 KW	±(0.5% FS +1 dgt.) [Cosφ=0.3 to 1.000]
Apparent Power	0.030 ~ 1.800 KVA	0.006 ~ 0.360 KVA	±(0.5% FS +1 dgt.)
Reactive Power	0.030 ~ 1.800 KVAr	0.006 ~ 0.360 KVAr	±(1.0% FS +1 dgt.) [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead		±(0.01 PF +1 dgt.)
Line Frequency	45.00 ~ 55.00 Hz		±0.1Hz
Active Energy (KWh)	0000 ~ 9999 KWh		Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh		
Reactive Energy (KVArh)	0000 ~ 9999 KVArh		

Note : KW / KVA / KVAr Measurements require Vrms x Irms x Cosφ/Sinφ ≥ 0.006 (for 1A Meter), ≥ 0.030 (for 5A Meter)

Case / Housing Material		DIN Black ABS, Dimension as per DIN 43700
Mounting Clamps		Sturdy, Moulded Derlin with suitable Hardware
Terminals / Connectors		Terminal Block : Thermoplastic (UL94V-0) with Tin Plated Brass Terminal
Auxiliary Power Supply		SMPS (85 - 265 VAC/DC)
Dimension (mm)	Front	96 x 96
	Depth (Behind Bezel Panel)	43 [For EM-08S(1A/5A)]
	Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)

Ordering Information: Model, Input Voltage, Input Current (1A or 5A any one only) & RS485 Port (Optional)

Connection Diagram

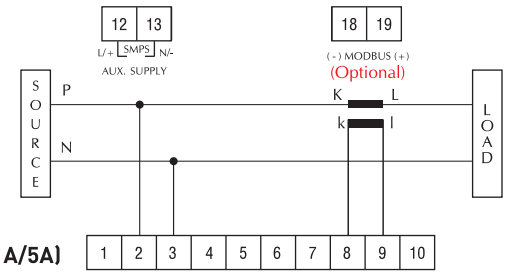

EM-08S (1A/5A)

1 Phase Multifunction Appliance Meter - TRMS with RS-485 Port

SOFTWARE

CE

RS 485

Micro Controller Based

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

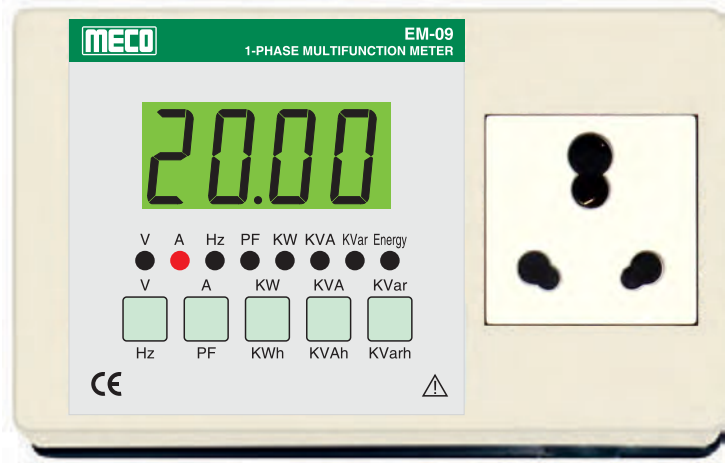

EM-09 (20A)
EM-09 (5A)
EM-09 (1A)

EM09 is a microcontroller based Portable, Continuous Use, Single Phase Electrical Meter indicating TRMS values of various electrical parameters. It measures 10 parameters on 10 display pages on a large LCD display (20mm). It has a smart socket. It is equipped with 5 keys to view all the parameters and for programming of the meter.

Features

- Measures V, A, PF, Hz, KW, KVA, KVAr, KWh, KVAh & KVArh
- TRMS Measurement
- Can be used for Continuous Monitoring
- Auto / Manual Scroll Display (User Selectable)
- State of Art Microcontroller Design
- Portable, Easy to Carry and Simple to Use
- LCD Display with Backlight (Green & White)
- RS 485 Port (5kV Isolated) with MODBUS RTU Protocol (Optional)
- POWER MASTER Software for MIS Reports (Optional)

Application

- Appliances Testing (AC, Refrigerator, Washing Machine etc.)
- LED Lights Testing
- Can be given to Field Technicians in their Tool Kit
- Can be used by R&D Dept. in Designing Energy Efficient Products
- Energy Audit and Plant Maintenance
- Studying Energy Efficiency of Electrical Equipment
- Building Management Systems
- Power Management
- Product Quality Testing

Specification

Functions	EM-09 (20A)	EM-09 (5A)	EM-09 (1A)	Accuracy
RMS Voltage	85~265Vrms			±(0.5% FS +1 dgt.)
RMS Current	(0.900A ~ 24Arms)	(0.125A ~ 6.0Arms)	(0.025A ~ 1.2Arms)	
Active Power	0.216 ~ 5.300 KW	0.030 ~ 1.590 KW	0.006 ~ 0.318 KW	±(0.5% FS +1 dgt.) [Cosφ=0.3 to 1.000]
Apparent Power	0.216 ~ 5.300 KVA	0.030 ~ 1.590 KVA	0.006 ~ 0.318 KVA	±(0.5% FS +1 dgt.)
Reactive Power	0.216 ~ 5.300 KVAr	0.030 ~ 1.590 KVAr	0.006 ~ 0.318 KVAr	±(1.0% FS +1 dgt.) [Sinφ=0.3 to 1.000]
Power Factor	0.3 Lag ~ 1.0 ~ 0.3 Lead			±(0.01 PF +1 dgt.)
Line Frequency	45.00 ~ 55.00 Hz			±0.1 Hz
Active Energy (KWh)	0000 ~ 9999 KWh			Class 1
Apparent Energy (KVAh)	0000 ~ 9999 KVAh			
Reactive Energy (KVArh)	0000 ~ 9999 KVArh			

Note : KW / KVA / KVAr Measurements require Vrms x Irms x Cosφ/Sinφ ≥ 0.006 (for 1A Meter), ≥ 0.030 (for 5A Meter) and ≥ 0.216 (for 20A Meter)

Model	EM-09 (20A)	EM-09 (1A/5A)
Case / Housing	ABS Case Suitable for Desktop Mounting / Portable / Wall Mounting Application	
Socket / Plug	6A - 20A Multi Socket & 20A Plug	6A
Auxiliary Power Supply	85-265V AC Supplied with 1 Phase Power Cord	
Dimensions (mm)	164 x 100 x 65mm (approx.)	

1 Phase Multifunction Appliance Meter - TRMS with RS-485 Port

Ordering Information : Model, Input Current (20A or 5A or 1A any one only) & RS485 Port (Optional)

Display Pages

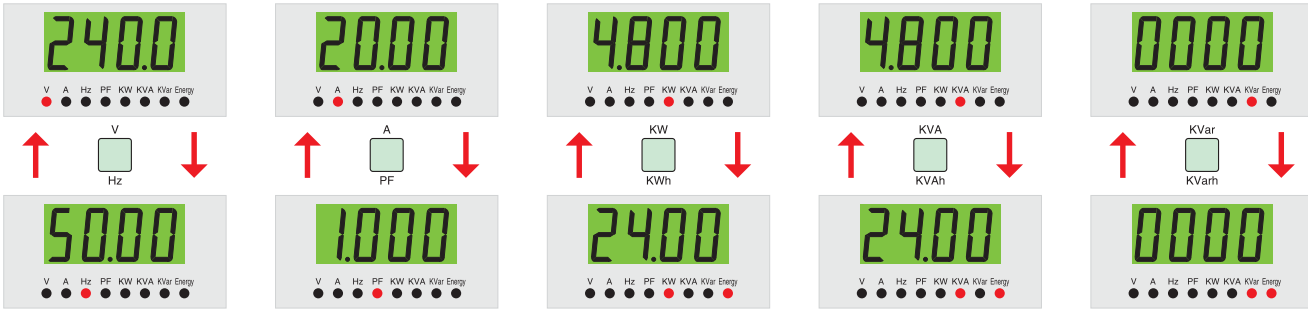

Applications

POWER MASTER Software

REAL TIME DISPLAY

LINE GRAPH DISPLAY

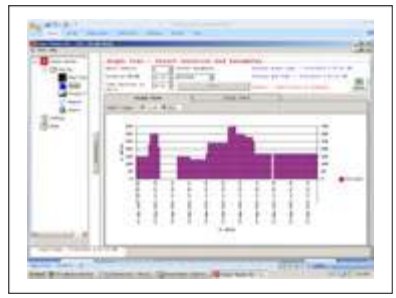

BAR GRAPH DISPLAY

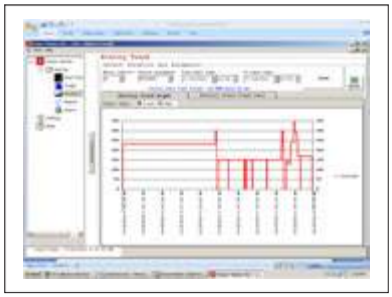

HISTORY TREND - LINE GRAPH DISPLAY

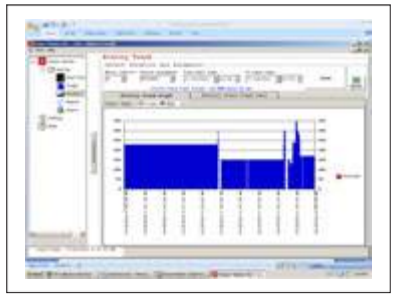

HISTORY TREND - BAR GRAPH DISPLAY

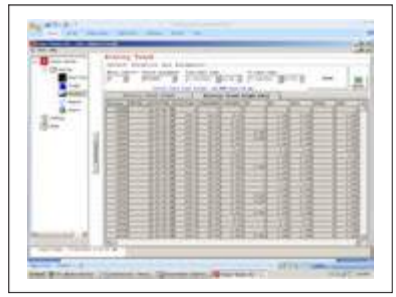

REPORT VIEW DISPLAY

POWERGUARD

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

PG08T

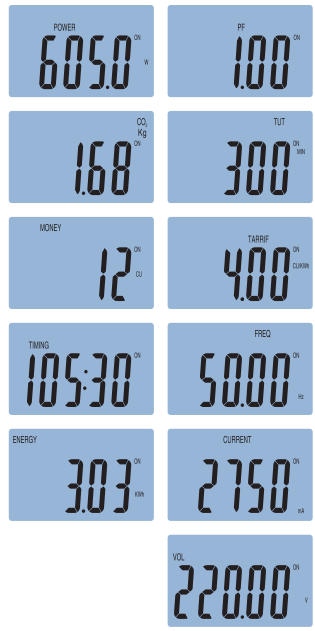

many more...

POWERGUARD is a simple to use and easy to handle product which has many applications because of its portability and light weight.

Measures

- Power (W) ● Power Factor (PF)
- Carbon Emission (CO_2 in kg)
- Total Usage Time (MIN) ● Money (CU)
- Tariff (CU/KWh) ● Timer (DHH:MM)
- Frequency (Hz) ● Energy (KWh)
- TRMS V & mA for Sine Wave

Features

- Three Pin Socket & Plug Suitable for Indian Socket
- Large LCD Display with Backlight
- Memory Retention (KWh, MIN, CU, CU/KWh, CO_2)
- Counts CO_2 generated by Electrical Equipment (0.555kg CO_2 is generated by using 1 KWh Energy)
- Timer & Relay Function for ON / OFF the Load

General Specifications

- Accuracy : Class 1.0
- Power Consumption : Less than 1W
- Input : 220V, 50Hz, 10A (Max.)
- Working Temperature : -25°C to +55°C
- Dimensions : 128 x 67 x 57mm (approx.)
- Weight : 150gms (approx.)

Specifications

Functions (Annunciator)	Input Range	Display Format	Accuracy (% of FS) (FS = 2200W)
Power (W)	0.2 ~ 1W	XXXX.X	< 10
	1 ~ 10W		5
	10 ~ 2200W		1
Power Factor (PF)	For 0.2 ~ 5W	X.XX	NA
	For 5 ~ 10W		NA
	For 10 ~ 2000W		< 0.05 PF
CO_2 (Kg)	CO_2 (Kg)	XXX.XX	NA
Total Usage Time (MIN)	Minutes	XXXXX	
Money (CU)	CU	XXXXX	
Tariff (CU/KWh)	CU/KWh	XX.XX	
Timer	000:01 ~ 923:59 (DHH:MM)	XXX:XX	
Frequency (Hz)	45 - 55Hz	XX.XX	±0.05Hz
Energy (KWh)	For 5 ~ 2200W	XXX.XX	1
TRMS Current (mA)	0.02 ~ 100mA	XXXXX	NA
	100mA ~ 10A		3
TRMS Voltage (V)	195 ~ 265V	XXX.XX	0.5
Applications	Teaching, Demonstration & Testing of Electrical Energy Consumption of Household / Office Appliances. It can be used in Houses, Offices, Shops, Schools, Laboratories etc.		

Ordering Information : Model

POWERGUARD - TRMS

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

Micro Controller Based

PG09 - 20A
PG09 - 5A
PG09 - 1A

Display Pages

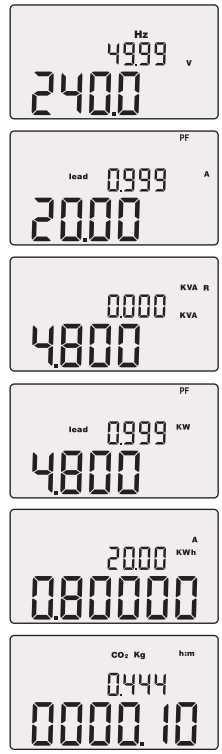

POWERGUARD is a simple to use and easy to handle product which can be widely used because of its portability and light weight

Measures

- TRMS Voltage (V)
- Frequency (Hz)
- TRMS Current (A)
- Power Factor (PF)
- Apparent Power (KVA)
- Reactive Power (KVAr)
- Active Power (KW)
- Energy Consumption (KWh)
- Energy Usage Time (EUT)
- Carbon Emission (CO_2 in kg)

Features

- Three Pin Socket & Plug Suitable for Indian Socket
- Large Dual Row LCD Display with Backlight & Annunciator
- Memory Retention (KWh, EUT)
- Simple, Easy & Accurate
- Continuous Measurement
- Counts CO_2 generated by Electrical Equipment (0.555kg CO_2 is generated by using 1KWh Energy)

General Specifications

- Accuracy : Class 1.0
- Power Consumption : Less than 2W (with backlight)
- Working Temperature : -10°C to +55°C, <70% RH
- Dimensions : 156 x 78 x 48mm (approx.)
- Weight : 300gms (approx.)

Specifications

Function	PG09 - 20A	PG09 - 5A	PG09 - 1A	Accuracy
RMS Voltage (V)	240V AC (Nominal) (195V ~ 265Vrms)			±0.5% of FS
RMS Current (A)	(0.110 ~ 20.00) Arms	(0.100 ~ 6.000) Arms	(0.010 ~ 1.200) Arms	±0.5% of FS
Active Power @240VAC (KW)	(0.026 ~ 4.800) KW	(0.024 ~ 1.440) KW	(2.400 ~ 288.0) W	±1.0% of FS
Apparent Power @240VAC (KVA)	(0.026 ~ 4.800) KVA	(0.024 ~ 1.440) KVA	(2.400 ~ 288.0) VA	±1.0% of FS
Reactive Power @240VAC (KVAr)	(0.026 ~ 4.800) KVAr	(0.024 ~ 1.440) KVAr	(2.400 ~ 288.0) VAr	±1.0% of FS
Power Factor (PF)	(0.026 ~ 0.120) KW	(0.024 ~ 0.096) KW	(021.6 ~ 048.0) W	> 0.03 PF
	(0.120 ~ 4.800) KW	(0.096 ~ 1.440) KW	(048.0 ~ 288.0) W	< 0.03 PF
Line Frequency (Hz)	45.00 ~ 55.00 Hz			±0.2 Hz
Active Energy (KWh)	000000 ~ 999999 KWh			Class 1
Energy Usage Time (EUT)	Hours / Minutes			NA
Carbon Emission (CO_2 in kg)	CO_2 (Kg)			NA
Applications :	Teaching, Demonstration & Testing of Electrical Energy Consumption of Household & Office Appliances. It can be used in Houses, Offices, Shops, Schools, Laboratories etc.			

Ordering Information : Model & Range

Customer Approvals / Appreciation

Survey No. 351, Thumkunta (Vill.)
Shameerpet (Mdl.), R.R. Dist.
Hyderabad - 500 078. India.
Phone : +91-8418-325556/247680/1/2
Fax : +91-8418-247683

HBL®
HBL Power Systems Ltd.

Date: 09.02.2018

To,
M/s. Meco Instruments Pvt. Ltd.
Plot EL-1, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai – 400 710

Kind Attn : Mr. Kamal Goliya (Director)

Sub : Product Appreciation Letter for MECO Digital Panel Meters

Dear Sir,

We thank you for your support extended to us for supply of **MECO Digital Panel Meters** regularly for our various projects in India and for many export projects.

We are very much satisfied with the performance of these meters.

The presales and post-sales service and support offered are prompt and timely.

We hope to have good and strong business relationship with you in future as well.

With Best Regards

P.N.V. Lakshmana Rao
Sr.Manager

Regd. Office :
HBL Power Systems Limited
Road No.10, Banjara Hills, Hyderabad - 500 034.
Website : www.hbl.in
CIN : L40109TG1986PLC006745

C&S electric

We touch your electricity everyday!

Date : 10 October 2019

To
Mr. Kamal Goliya – C.E.O.
M/s. Meco Instruments Pvt. Ltd.
El-1, MIDC Electronic Zone,
Mahape,
Navi Mumbai. Maharashtra

Dear Sir,

Since many years we are using your MECO Make Digital Panel Meters, Multifunction Meters and Transducers in our Panels for our various reputed projects.

Overall Performance of MECO Digital Panel Meters, Multifunction Meters and Transducers are found Satisfactory.

We appreciate Mr. Haren Shah and his team for executing orders as per their committed delivery. We also thank for extending their service support as and when required by us.

We look forward to have similar kind of support in future from MECO's Team.

Thanking you in advance
Yours faithfully,
For C & S...Electric Ltd. [MV Division]
Manager SCM
Arun Sharma - .....(designation)
Authorised Signatory

C&S Electric Limited (MV Division)
Works: 26A, Sector-81, Sunoyar Industrial Area, Kasna Road, Greater Noida-201310 (U.P.) Tel.: +91 120 4710000 Fax: +91 120 4710034
Registered Office: 222, Okhla Industrial Estate, Phase-III, New Delhi- 110 020 (INDIA) Tel.: +91 11 3384 9000-09 Fax: +91 11 2684 7342
info@cselectric.co.in www.cselectric.co.in CIN NO. U31909DL1971PLC005672

HANSU CONTROLS
OFF: PLOT W-281, TTC INDUSTRIAL AREA, RABALE, MIDC, NEW MUMBAI-400 701.
TEL :(022) 27690037, 65193145, **CELL:** 9821550302, **FAX:** 25001021, 27690038
WEB SITE: www.hansucontrols.com, **E-Mail:** hansucontrols29@rediffmail.com, hansucontrols@yahoo.com

REF: L\MECO\QDC00011 **PAGE 1 OF 1** **JULY 7, 2016.**

MECO INSTRUMENTS PVT LTD.
Plot no. EL-1, MIDC Electronic Zone,
TTC industrial Area, Mahape,
Navi Mumbai-400710(INDIA)

Phone: 022-27673300(Board) ,27673311
Fax: 022-2767310, 27673330
E-mail : sales@mecoinst.com

ATTN: Mr. Haren Shah(Senior Marketing Executive),mob:09820093232

Dear Sir,

We wish to put on records that we had placed an order for 160 nos 72x72mm ammeter with 240 degree scale and with 4-20ma input in some cases and in some cases 1A input current with red mark at full scale with several different Ranges, 2% accuracy & 8 times suppressed scale. We are pleased to inform you that you delivered in time and 100% correct as per order and made arrangement for inspection by consultant **M/S .THYSSENKRUPP INDUSTRIAL SOLUTIONS (INDIA) PVT LTD. (FORMERLY UHDE INDIA LTD).**

We appreciate your professional approach and excellent technical capability.

Thanking you,
HANDLED BY **FOR HANSU CONTROLS**

KUNAL.P. SAVLA. **P.V.SAVLA.**

VINAYAK TRANSMISSION PRODUCTS PVT. LTD.
O: 116/321, Unique Indl Estate, Prabhadevi, Mumbai – 25, INDIA T: 022 24220743 F: +91 22 24225155 E: info@vinayaktrans.com
F: W-276, MIDC, TTC, Rabale, Navi Mumbai – 400 701, INDIA T/F: +91 22 27607738 E: vtppl@mtnl.net.in

To,
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710
Tel. No. 022 – 27673300 Fax No. 022 – 27673310

Dear Sir,

Kind Attn : Mr. Kamal Goliya – C.E.O. /Mr. Haren Shah – Sr. Mkt. Executive

Sub MECO Make Digital Panel Meters & Frequency Meters in our Panel for MSEDCL – Infra Projects.

Project C & R Panel for MSEDCL – Infra Projects.

We have issued several purchase order to MECO Instruments Pvt. Ltd. Mahape, Navi Mumbai for MECO Make Digital Panel Meters & Frequency Meters for our C & R Panel for MSEDCL-Infra Projects.

Overall performance of MECO Make Digital Panel meters & Digital Frequency meters supplied to us are found satisfactory. We also appreciate M/s. MECO Instruments for extending timely delivery for our purchase order released time to time.

We look forward to have similar kind of service and support as and when required from MECO Team members in future.

This letter is issued as per request from M/s MECOInstruments Pvt. Ltd. as feedback from Customers.

Thanking You,
Yours Faithfully,

Vinayak Transmission Products Pvt. Ltd.

V.V. Karmalkar
Dy. General Manager
9820855499

MECO®

SINCE 1962

BEST DIGITAL PANEL METER AWARD

AUTOMATION'S BEST PROCESS INDICATOR MADE IN INDIA AWARD

Digital Panel Meters & Modules

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

4 Digit Programmable Ammeter - TRMS
3 & 4 Digit Programmable Voltmeter - TRMS

new

CE

Micro Controller Based



SMP72 - DC



SMP72 - AC



SMP72 - AC

SMP48 - DC

SMP48 - AC

Features

- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 9999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point

Specifications

- **Measuring Method** — TRMS Using Microcontroller
- **Display Type** — Red LED Super Bright Display
- **Maximum Display** — 4 Digit / 9999 (Max.) Counts
- **Resolution** — 0.001 to 1 Count Depending on Range / Scale Display
- **Decimal Point** — Auto Selection
- **Over Range Indication** — " Or "
- **Under Range Indication** — NA
- **Sampling Rate** — 3 Samples / Second
- **Maximum Overload** — Voltage : 1.2 Times Continuous
Current : 1.5 Times Continuous
- **Mounting Clamps** — Sturdy, Moulded Derlin with Suitable Hardware
- **Frequency Response** — 40 - 400Hz
- **Auxiliary Supply** — 85 - 265V AC / DC
- **VA Burden (Typical)** — Auxiliary : ≤ 1.5VA
Voltage Input : ≤ 1.0VA
Current Input : ≤ 1.0VA
- **Environmental Conditions** — 0°C to + 55°C, < 70% RH (Operation)
-10°C to + 70°C, < 70% RH (Storage)
27°C ±5°C (Calibration)
- **Dielectric Strength** — 2.5KV @ 50Hz for 1 minute between Input - Auxiliary & Case -Terminals
- **Impulse Withstand** — 3.5KV, 1.2 / 50 micro second
- **Case / Housing Material** — Polycarbonate, Black
- **Faceplate / Lens** — Polycarbonate Transparent Red
- **Connectors / Terminal** — Nylon 66, 33% GF, Black / Brass
- **Display Stability** — Within ±1 Digit

Model	Input		Range (Any One Only)	Programmable Display Key	Aux Supply	Accuracy	Digits (max.)		Digit Height
							3	4	0.56" / 14.2mm
SMP72 / SMP48 / SMP96	DC	mV	0 - 75 (Shunt Operated)	✓(*)	85-265V AC / DC @ 50 / 60Hz	± 0.5% of FSD	-	✓	✓
			0 - 200	-			-	✓	✓
		V	0 - 20	-			-	✓	✓
			0 - 200	-			-	✓	✓
			0 - 1000	-			-	✓	✓
		mA	0 - 2	-			-	✓	✓
			0 - 20	-			-	✓	✓
			0 - 200	-			-	✓	✓
		A	0 - 2	-			-	✓	✓
			0 - 5	-			-	✓	✓
			0 - 20 (Direct)	-			-	✓	✓
	AC	V	0 - 110 (PT Operated)	✓(#)			-	✓	✓
			0 - 20	-			-	✓	✓
			0 - 200	-			-	✓	✓
			0 - 750	-			✓(Standard)	✓(Optional)	✓
		A	0 - 1 (CT Operated)	✓(*)			-	✓	✓
			0 - 5 (CT Operated)	✓(*)			-	✓	✓
			0 - 20 (Direct)	-			-	✓	✓

4 Digit Programmable Ammeter - TRMS
3 & 4 Digit Programmable Voltmeter - TRMS

new

CE

Micro Controller Based

SMP48 - AC



SMP96 - DC



SMP96 - AC



SMP96 - AC

 # User Programmable PTR Display Value (Using Key)

Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)
1	1	0.110	5	30	3.300	9	300	33.00	13	2000	220.0
2	3.77	0.415	6	60	6.600	10	600	66.00	14	4000	440.0
3	4	0.440	7	100	11.00	11	1000	110.0	-	-	-
4	20	2.200	8	200	22.00	12	1200	132.0	-	-	-

*** User Programmable CT Primary / Shunt Display Value (Using Key)**

CT Primary / Shunt Display Value								
1	25	70	150	350	700	1500	4000	8000
5	30	75	175	400	750	1600	5000	9000
10	40	80	200	450	800	2000	6000	-
15	50	100	250	500	1000	2500	7000	-
20	60	125	300	600	1200	3000	7500	-

Dimensions (mm)			
Model	**SMP72**	**SMP48**	**SMP96**
Front	72 x 72	48 x 96	96 x 96
Depth (Behind Bezel)	43	58	39.5
Panel Cut-Out	68 x 68	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$

Ordering Information : Model, Input & Range (3 Digits / 4 Digits for 750V AC Voltmeter)

Terminal Connection

AUX 85-265V AC/DC		INPUT	
P	N	LO	HI
1	2	3	4

SMP72

INPUT		AUX 85-265V AC/DC	
HI	LO	N	P
1	2	3	4

SMP48 / SMP96

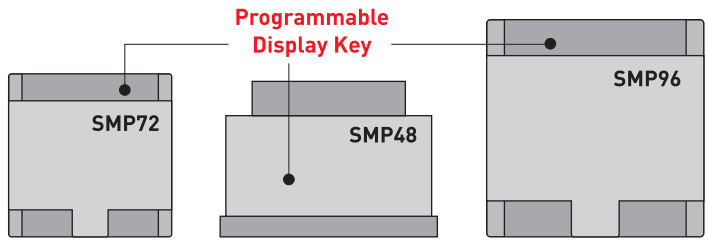

Back Side of Meter | Bottom Side of Meter | Back Side of Meter

3½ Digit Ammeter / Voltmeter

CE

SMP35S

SMP9635S

Specifications

- **Measuring Method** — Dual Slope A/D Conversion
- **Sampling Rate** — 2.5 Samples per Second
- **Display Type** — Red LED Super Bright Display
- **Maximum Display** — 1999 Counts
- **Resolution** — 0.001 to 1 Count depending on range
- **Polarity Indication** — " - " is indicated for Negative Input
- **Decimal Selection** — Field Selectable
- **Over Range Indication** — " 1 " or " -1 "
- **Maximum Overload** — Voltage : 1.2 times continuous
Current : 2 times continuous
- **Frequency Response** — 40 - 400Hz
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Environment** — Calibration : 27°C ± 5°C,
Operating : 0 to 50°C, RH < 70%
Storage : -10 to 60°C, RH < 70%
- **Crest Factor** — 4 (max.) TRMS accuracy specified for sine wave input
- **VA Burden (Typical)** — Auxiliary (110 / 230V AC) : < 5VA
Auxiliary : < 2.5VA
Voltage : < 1.0VA
Current : < 1.0VA
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Input - Auxiliary - Case - Terminals
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **Mounting Clamps** — Sturdy, Moulded ABS with suitable Hardware
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Model	Input		Range	Auxiliary Power Supply (any one only)			Accuracy Class			Digits (max.)	Display Digit Height
				110V AC	19-90V AC/DC	85-265V AC/DC	0.2	0.5	1	3½	0.56"/ 14.2mm
SMP35S / SMP9635S	DC	mV	0 - 200mV	✓	✓	✓	✓	-	-	✓	✓
		V	0 - 2, 20, 200V	✓	✓	✓	✓	-	-	✓	✓
		V	0 - 1000V	✓	✓	✓	-	✓	-	✓	✓
		mA	0 - 2, 20, 200mA	✓	✓	✓	✓	-	-	✓	✓
		A	0 - 1, 2, 5, 20A	✓	✓	✓	-	✓	-	✓	✓
		Zero Supp.	4-20mA or 1 - 5V	✓	✓	✓	✓	-	-	✓	✓
		Re-Scaleable	0 - 5V / 10V DC, 1 - 5V DC, 0 - 20mA DC, 0 - 50 / 60 / 75mV, 4 - 20mA (any one) to display 0.100 to1600 in 64 steps. Please suffix these models with RS as SMP35SRS or SMP9635SRS	✓	✓	✓	-	✓	✓	✓	✓
	AC	V	0 - 2, 20, 200, 750V	✓	✓	✓	-	✓	-	✓	✓
		A	0 - 1, 2, 5A	✓	✓	✓	-	✓	-	✓	✓
		A	0 - 20A	✓	✓	✓	-	-	✓	✓	✓
		Re-Scaleable	0 - 1A or 0 -5A (any one) to display 0.100 to 1600 in 64 steps. Please suffix models with RS as SMP35SRS or SMP9635SRS	✓	✓	✓	-	✓	-	✓	✓

3½ Digit Ammeter / Voltmeter

CE

SMP35ST

SMP9635ST

SMPTC

SMP96TC

Model	Input		Range	Auxiliary Power Supply (any one only)			Accuracy Class	Digits (max.)	Display Digit Height
				110V AC	19-90V AC/DC	85-265V AC/DC	1	3½	0.56"/ 14.2mm
SMP35ST / SMP9635ST	AC TRMS	V	0 - 2, 20, 200, 750V	✓	✓	✓	✓	✓	✓
		A	0 - 1, 2, 5, 20A	✓	✓	✓	✓	✓	✓

Tap Changer DPM

Model	Input		Range	Auxiliary Power Supply (any one only)		Accuracy Class	Digits (max.)	Display Digit Height
				110 / 230V AC	24 / 48 / 110 / 220V DC	2	2	0.56"/ 14.2mm
SMPTC / SMP96TC	DC	TAP Position	4 - 20mA DC from Transducer to Display "01 for 4mA DC" and "02 to 99 for 20mA DC".	-	✓	✓	✓	✓

Dimensions (mm)				
Model	SMP35S / SMP35ST	SMPTC	SMP9635S / SMP9635ST	SMP96TC
Front	48 x 96	48 x 96	96 x 96	96 x 96
Depth (Behind Bezel)	88	135	90	135
Panel Cut-Out	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$

Ordering Information: Model, Input Range, CTR / PTR (if any), Scale Display, Aux. Supply & Accuracy Class

Terminal Connection



SMP35S / SMP9635S
SMP35ST / SMP9635ST



SMPTC / SMP96TC

4½ Digit Programmable DC / AC Ammeter & Voltmeter - TRMS with RS-485 Communication

new

Preliminary Data

CE

+ − RS 485

SMP72x14445SN
Voltmeter - TRMS

SMP72x14445SN
Voltmeter - DC

SMP72x14445SN
Voltmeter - DC

Micro Controller Based

Features

- High Accuracy Across the Entire Range
- User Programmable Display (CT Primary / PTR / Shunt Value)
- 19999 Count (Max) High Resolution Display
- Auto Selection of Decimal Point
- RS485 Port, 5KV Isolated with Modbus RTU Protocol (Optional)

Specifications

- **Measuring Method** — TRMS Using Microcontroller
- **Display Type** — 1"/ 25.4mm Red LED Super Bright Display
- **Maximum Display** — 4½ Digit / 19999 (Max.) Counts
- **Resolution** — 0.0001 to 1 Count Depending on Range / Scale Display
- **Decimal Point** — Auto Selection
- **Over Load Indication** — "-OL-"
- **Under Load Indication** — NA
- **Sampling Rate** — 3 Samples / Second
- **Maximum Overload** — Voltage : 1.2 Times Continuous
Current : 1.2 Times Continuous
- **Mounting Clamps** — Sturdy, Moulded Derlin with Suitable Hardware
- **Frequency Response** — 40 - 400Hz
- **Auxiliary Supply** — 85 - 265V AC / DC (Standard)
19 - 90V AC / DC (Optional)
- **VA Burden (Typical)** — Auxiliary : ⩽ 1.5VA
Voltage Input : ⩽ 1VA
Current Input : ⩽ 0.5VA
- **Environmental Conditions** — 0°C to + 55°C, < 70% RH (Operation)
-10°C to + 70°C, < 70% RH (Storage)
27°C ±5°C (Calibration)
- **Dielectric Strength** — 2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
- **Impulse Withstand** — 3.5KV, 1.2 / 50 Micro Second
- **Case / Housing Material** — Polycarbonate, Black
- **Faceplate / Lens** — Polycarbonate Transparent Red
- **Connectors / Terminal** — Nylon 66, 33% GF, Black / Brass
- **Display Stability** — Within ±2 Digit
- **Polarity Indication** — "-" is Indicated for Negative Input

Model	Input		Range (Any One Only)	Programmable Display Key	Aux Supply	Accuracy	Digits (max.)	Digit Height
							4½	1" / 25.4mm
SMP72 x 14445SN	DC	mV	0 - 75 (Shunt Operated)	✓(*)	85-265V AC / DC @ 50 / 60Hz or 19-90V AC/DC @ 50 / 60Hz (Optional)	± 0.5% of FSD	✓	✓
			0 - 200	-			✓	✓
		V	0 - 2	-			✓	✓
			0 - 20	-			✓	✓
			0 - 200	-			✓	✓
			0 - 1000	-			✓	✓
		mA	0 - 2	-			✓	✓
			0 - 20	-			✓	✓
			0 - 200	-			✓	✓
		A	0 - 2	-			✓	✓
			0 - 5	-			✓	✓
	AC	V	0 - 110 (PT Operated)	✓(#)			✓	✓
			0 - 2	-			✓	✓
			0 - 20	-			✓	✓
			0 - 200	-			✓	✓
			0 - 750	-			✓	✓
		A	0 - 1 (CT Operated)	✓(*)			✓	✓
			0 - 5 (CT Operated)	✓(*)			✓	✓

4½ Digit Programmable DC / AC Ammeter & Voltmeter - TRMS with RS-485 Communication

new

Preliminary Data

CE

RS 485

Micro Controller Based

SMP72x14445SN
Voltmeter - TRMS

SMP72x14445SN
Ammeter - TRMS

SMP72x14445SN
Ammeter - DC

User Programmable PTR Display Value (Using Key)

Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)	Sr.	Ratio	PTR (KV AC)
1	1	0.110	5	30	3.300	9	300	33.00	13	2000	220.0
2	3.77	0.415	6	60	6.600	10	600	66.00	14	4000	440.0
3	4	0.440	7	100	11.00	11	1000	110.0	-	-	-
4	20	2.200	8	200	22.00	12	1200	132.0	-	-	-

* User Programmable CT Primary / Shunt Display Value (Using Key)

CT Primary / Shunt Display Value							
1	30	80	250	600	1500	5000	10000
5	40	100	300	700	1600	6000	12000
10	50	125	350	750	2000	7000	15000
15	60	150	400	800	2500	7500	20000
20	70	175	450	1000	3000	8000	-
25	75	200	500	1200	4000	9000	-

Dimensions (mm)	
Model	**SMP72x14445SN**
Front	72 x 144
Depth (Behind Bezel)	93
Panel Cut-Out	$68^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$

Ordering Information : Model, Input Range, CTR / PTR / SHUNT (if any), Scale Display, Auxiliary Supply, Accuracy Class & RS 485 Modbus Communication (Optional).

Terminal Connection

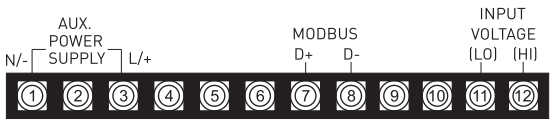

SMP72x14445SN - Voltmeter

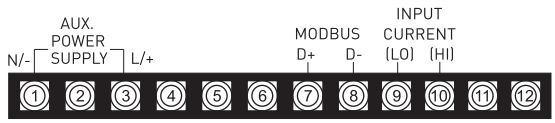

SMP72x14445SN - Ammeter

4½ Digit Ammeter / Voltmeter

CE

SMP45S, SMP45ST

SMP9645S
SMP9645ST

SMP72x14445, SMP72x14445S
SMP72x14445T, SMP72x14445ST

Specifications

- **Measuring Method** Dual Slope A/D Conversion
- **Sampling Rate** 2.5 Samples per Second
- **Display Type** Red LED Super Bright Display
- **Maximum Display** 19999 Counts
- **Resolution** 0.0001 to 1 Count depending on the range
- **Polarity Indication** " - " is indicated for negative input
- **Decimal Selection** Field Selectable
- **Over Range Indication** "0000" blinking
- **Maximum Overload** Voltage : 1.2 times continuous
  Current : 2 times continuous
- **VA Burden (Typical)** Auxiliary (110 / 230V AC) : < 5VA
  Auxiliary : < 2.5VA
  Voltage Input : < 1.0VA
  Current Input : < 1.0VA
- **Frequency Response** 40 - 400Hz
- **Crest Factor** 4 (max.) TRMS accuracy specified for sine wave input
- **Faceplate / Lens** Red Antiglare Faceplate with Annunciators
- **Environment** Calibration : 27°C ± 5°C,
  Operating : 0 to 50°C, RH < 70%
  Storage : -10 to 60°C, RH < 70%
- **Dielectric Strength** 2.5 kV at 50Hz for 1 min. between Input - Auxiliary - Case - Terminals
- **Case / Housing Material** DIN Black ABS, Dimension as per DIN 43700
- **Mounting Clamps** Sturdy, Moulded ABS with suitable Hardware
- **Connectors** Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** Within ± 2 Digits

Model	Input		Range	Auxiliary Power Supply (any one only)			Accuracy Class		Digits (max.)	Display Digit Height
				110V AC	19-90V AC/DC	85-265V AC/DC	0.5	1	4½	0.56"/ 14.2mm
SMP45S / SMP9645S (Data Hold - Optional)	DC	mV	0 - 200mV	✓	✓	✓	✓	✓	✓	✓
		V	0 - 2, 20, 200V	✓	✓	✓	✓	✓	✓	✓
		V	0 - 1000V	✓	✓	✓	✓	✓	✓	✓
		mA	0 - 2, 20, 200mA	✓	✓	✓	✓	✓	✓	✓
		A	0 - 1, 2, 5A	✓	✓	✓	✓	✓	✓	✓
		Zero Supp.	4-20mA or 1 - 5V	✓	✓	✓	✓	✓	✓	✓
	AC	V	0 - 2, 20, 200, 750V	✓	✓	✓	✓	✓	✓	✓
		A	0 - 1, 2, 5A	✓	✓	✓	✓	✓	✓	✓
SMP45ST / SMP9645ST (Data Hold - Optional)	AC TRMS	V	0 - 2, 20, 200, 750V	✓	✓	✓	-	✓	✓	✓
		A	0 - 1, 2, 5A	✓	✓	✓	-	✓	✓	✓

Dimensions (mm)

Model	SMP45S / SMP45ST	SMP9645S / SMP9645ST	SMP72x14445 / SMP72x14445T	SMP14445 / SMP14445T	SMP96x28845
Front	48 x 96	96 x 96	72 x 144	144 x 144	96 x 288
Depth (Behind Bezel)	88	90	130 93 (SMP72x14445S)	59 72 (SMP14445S)	77
Panel Cut-Out	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$68^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $282^{(+0.8,\ -0.0)}$

4½ Digit Ammeter / Voltmeter

SMP14445S, SMP14445ST

SMP14445, SMP14445T

SMP96x28845

Model	Input		Range	Auxiliary Power Supply (any one only)	Accuracy Class		Digits (max.)	Display Digit Height	
					0.5	1	4½	1.0"/ 25.4mm	2.3"/ 58mm
SMP72x14445S/ SMP72x14445/ SMP14445	DC	mV	0 - 200mV	19-90V AC/DC or 85-265V AC/DC	✓	✓	✓	✓	-
		V	0 - 2, 20, 200V		✓	✓	✓	✓	-
		V	0 - 1000V		✓	✓	✓	✓	-
		mA	0 - 2, 20, 200mA		✓	✓	✓	✓	-
		A	0 - 1, 2, 5A		✓	✓	✓	✓	-
		Zero Supp.	4-20mA or 1 - 5V		✓	✓	✓	✓	-
	AC	V	0 - 2, 20, 200, 750V		✓	✓	✓	✓	-
		A	0 - 1, 2, 5A		✓	✓	✓	✓	-
SMP72x14445T/ SMP72x14445ST/ SMP14445T	AC TRMS	V	0 - 2, 20, 200, 750V		-	✓	✓	✓	-
		A	0 - 1, 2, 5A		-	✓	✓	✓	-
SMP96x28845S	DC	mV	0 - 200mV		✓	✓	✓	-	✓
		V	0 - 2, 20, 200V		✓	✓	✓	-	✓
		V	0 - 1000V		✓	✓	✓	-	✓
		mA	0 - 2, 20, 200mA		✓	✓	✓	-	✓
		A	0 - 1, 2, 5A		✓	✓	✓	-	✓
		Zero Supp.	4-20mA or 1 - 5V		✓	✓	✓	-	✓
	AC	V	0 - 2, 20, 200, 750V		✓	✓	✓	-	✓
		A	0 - 1, 2, 5A		✓	✓	✓	-	✓

Ordering Information: Model, Input Range, CTR / PTR (if any), Scale Display, Data Hold (Optional), Auxillary Supply, Accuracy Class & Display Height

Terminal Connection



SMP45S / SMP9645S / SMP45ST / SMP9645ST

SMP72x14445 / SMP72x14445S / SMP72x14445ST SMP72x14445T

SMP14445 / SMP14445S / SMP14445T / SMP14445ST



SMP96x28845

4 Digit Triple Range Programmable Process Indicator

new

Preliminary Data

CE

Micro Controller Based

TRPI-48
4-20mA / 0-20mA / 0-10V

General Description

MECO TRPI-48 is a 4 Digit Triple Range Programmable Process Indicator having three input ranges in the same meter. These input ranges are programmable by the user. The display from -1999 to 9999 is also User Programmable. Thus the user has a wide choice of inputs and displays which makes this meter truly flexible and versatile for applications in Process Industry, Automation, Refinery Plants, Variable Drives, Process Equipment etc.

Features

- 3 Input Ranges in One Meter (User Programmable)
- Decimal Point : Selectable
- 9999 Count (Max.) High Resolution Display
- User Programmable Display -1999 to 9999
- Zero & Span Adjustment through Software
- High Accuracy Across the Entire Range

Specifications

- **Maximum Display** — 4 Digit, 9999 (Max), 7 Segment 0.56" LED Display
- **Input Signal** — 4 - 20mA DC, 0 - 20mA DC & 0 - 10V DC (User Programmable)
- **Display Range** — -1999 To 9999 (Scale Display can be set from -1999 to 9999)
- **Accuracy** — ±0.5% of FSD
- **Aux. Supply** — 85 - 265V AC/DC (Standard)
  19 - 90V AC/DC (Optional) @ 50/60 Hz
- **Resolution** — 0.001 - 1 Count depending on Range / Scale Display
- **Overload Indication** — -OL-
- **Underload Indication** — -UL- (for 4-20mA DC)
- **Sampling Rate** — 3 Samples / Second
- **Maximum Overload** — Voltage : 1.2 Times Continuous
  Current : 1.2 Times Continuous
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Mounting Clamps** — Sturdy, Moulded Derlin with Suitable Hardware
- **VA Burden** — Auxillary : ≤ 1.5VA
  Voltage Input : ≤ 0.5VA
  Current Input : ≤ 0.5VA
- **Environmental Conditions** — 0 to 55°C, <70% RH (Operation)
  -10 to 70°C, <70% RH (Storage)
  27°C ± 5°C (Calibration)
- **Dielectric Strength** — 2.5KV @ 50Hz for 1 minute between Input-Auxiliary & Case-Terminals
- **Impulse Withstand** — 3.5kV, 1.2 / 50µ seconds
- **Case / Housing Material** — Black ABS, Dimension as per DIN 43700
- **Connectors** — Terminal Block : Thermoplastic (UL 94V - 0) with Tin plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Model	Input	Triple Range (User Programmable)	Programmable Display Key	Aux Supply	Accuracy	Digits (max.)	Digit Height
						4	0.56" / 14.2mm
TRPI-48	DC	4 - 20mA, 0 - 20mA & 0 - 10V	✓	85-265V AC / DC (Standard) OR 19-90V AC / DC (Optional) @50/60Hz	± 0.5% of FSD	✓	✓

Ordering Information : Model, Input Range, Auxiliary Supply & Scale Display

Terminal Connection

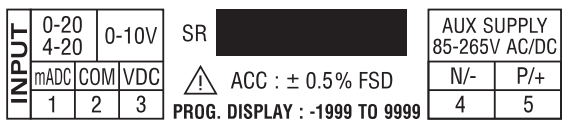

4½ Digit Programmable Process Indicator with RS-485 Communication

new

Preliminary Data

CE

RS 485

DPI-72x14445SN

DPI-72x14445SN

DPI-72x14445SN

Micro Controller Based

Features

- High Accuracy Across the Entire Range
- User Programmable Display -19999 to 19999 (adjustable)
- ZERO and SPAN Adjustment through Software
- 19999 Count (Max) High Resolution Display
- Decimal Point : Selectable
- RS485 Port, 5KV Isolated with Modbus RTU Protocol (Optional)

Specifications

- **Display Type** — 1"/ 25.4mm Red LED Super Bright Display
- **Maximum Display** — 4½ Digit / 19999 (Max.) Counts
- **Resolution** — 0.0001 to 1 Count Depending on Range / Scale Display
- **Over Load Indication** — "-OL-"
- **Under Load Indication** — "-UL-"
- **Sampling Rate** — 3 Samples / Second
- **Maximum Overload** — Voltage : 1.2 Times Continuous
Current : 1.2 Times Continuous
- **Mounting Clamps** — Sturdy, Moulded Derlin with Suitable Hardware
- **Auxiliary Supply** — 85 - 265V AC / DC (Standard)
19 - 90V AC / DC (Optional)
- **VA Burden (Typical)** — Auxiliary : ≤ 1.5VA
Voltage Input : ≤ 1.0VA
Current Input : ≤ 1.0VA
- **Environmental Conditions** — 0°C to + 55°C, < 70% RH (Operation)
-10°C to + 70°C, < 70% RH (Storage)
27°C ±5°C (Calibration)
- **Dielectric Strength** — 2.5KV @ 50Hz for 1 Minute between Input - Auxiliary & Case -Terminals
- **Impulse Withstand** — 3.5KV, 1.2 / 50 Micro Second
- **Case / Housing Material** — Polycarbonate, Black
- **Faceplate / Lens** — Polycarbonate Transparent Red
- **Connectors / Terminal** — Nylon 66, 33% GF, Black / Brass
- **Display Stability** — Within ±2 Digit
- **Polarity Indication** — Yes

Model	Input		Range (Any One Only)	Programmable Display Key	Aux Supply	Accuracy	Digits (max.)	Digit Height
							4½	1" / 25.4mm
DPI-72x 14445SN	DC	mA	4 - 20mA	✓	85-265V AC/DC @ 50/60Hz or 19-90V AC/DC @ 50/60Hz	±0.5% of FSD	✓	✓
			-20 / 0 / 20mA	✓			✓	✓
			0 - 20mA	✓			✓	✓
		V	-10 / 0 / 10V	✓			✓	✓
			0 - 10V	✓			✓	✓

Ordering Information : Model, Input Range, Scale Display, Annunciator, Auxiliary Supply, Accuracy Class & RS 485 Modbus Communication (Optional).

Annunciators

°C	rpm	Hz	pH	kmph	db	mmhg	N/m²	MPM	sph	x100	Ft/s	°F	rad
%	mm	kg	MW	kvar	cosφ	psi	bar	CPS	Rev/s	m³/min	Ltr/hr	TON	Lux

Terminal Connection



DPI-72x14445SN

3 Phase Programmable Ammeter / Voltmeter - TRMS

Micro Controller Based

SMP35ASN - Ammeter

SMP35VSN - Voltmeter

SMP9635ASN - Ammeter



SMP9635VSN - Voltmeter

Features

- 1A / 5A Input in same Meter (User Selectable)
- High Accuracy Across the Entire Range
- 9999 Count High Resolution Display
- Aux. Power Supply : 85 - 265V AC / DC
- Aux. Power Supply : 19 - 90V AC / DC (Optional)
- Auto / Manual Scroll Display (User Selectable)
- 3P3W / 3P4W (User Selectable)
- LED Indication for R, Y, B, RY, YB, BR
- User Programmable Display / CTP / PTR
- Auto Selection of Decimal Point
- Auto Indication of KV & KA
- Setup / Programming Protected by Password

Specifications

- **Measuring Method** — TRMS using Microcontroller
- **Display Type** — Red LED Super Bright Display
- **Maximum Display** — 4 Digit / 9999 Counts
- **Overload / Underload** — - OL - / - UL - Indication
- **Resolution** — 0.001 to 1 Count Depending on Range
- **Sampling Rate** — 3 Samples / Second
- **Maximum Overload** — Voltage : 1.2 times continuous
Current : 2 times continuous
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Mounting Clamps** — Sturdy, Derline (Engineering plastic)
- **VA Burden (Typical)** — Auxiliary : < 2VA / Phase
Voltage Input : <1.0VA / Phase
Current Input : < 1.0VA / Phase
- **Frequency Response** — 45 - 65Hz
- **Environmental Conditions** — 0 to 55 °C, < 70% RH (Operation)
-10 to 70 °C, < 70% RH (Storage)
27 °C ± 5 °C (Calibration)
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Input - Auxiliary & Case - Terminals
- **Impulse Withstand** — 3.5kV, 1.2 / 50µs
- **Case / Housing Material** — Black ABS, Dimension as per DIN 43700
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Model	Input AC	Range (any one only)	Programmable Display / CTP / PTR	Aux. Power Supply		Accuracy	Digits (max.)	Display Digit Height
				85-265V AC / DC	19-90V AC / DC	± (0.5% FSD + 2 dgts)	4	0.56"/ 14.2mm
SMP35VSN SMP9635VSN	V	51 - 300V AC (PH-N)	1 - 9999	✓	Optional	✓	✓	✓
SMP35ASN SMP9635ASN	A	For 1A Range : 0.080 - 1.200A AC	1 - 9999	✓	Optional	✓	✓	✓
		For 5A Range : 0.200 - 6.000A AC	5 - 9999					

Dimensions (mm)		
Model	SMP35VSN / SMP35ASN	SMP9635VSN / SMP9635ASN
Front	48 x 96	96 x 96
Depth (Behind Bezel)	88	90
Panel Cut-Out	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$

Ordering Information : Model, Aux. Supply

Terminal Connection

3Phase System



SMP35ASN / SMP9635ASN

3Phase 3Wire System



3Phase 4Wire System



SMP35VSN / SMP9635VSN

4 Digit Frequency Meter
4 Digit RPM Meter

new

CE

FDM4S

RPM4AS (48x96)
RPM964AS (96x96)



FDM964S

FDM72x1444SA
FDM72x1444SB

FDM1444SA
FDM1444SB

Specifications

- **Measuring Method** — Interval Measurement Method using Microcontroller
- **Display Type** — Red LED (Standard)
- **Maximum Display** — 9999 Counts for 4 Digit Meters
- **Resolution** — 0.01 to 1 for 4 Digit depending on range
1 RPM for RPM Meter
- **Decimal Selection** — Auto (FDM4S & FDM964S) / Factory Set (For Others)
- **Maximum Overload** — Voltage : 1.2 times continuous
- **VA Burden (Typical)** — Auxiliary : < 4.5 VA
Voltage Input : < 0.5VA
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Environment** — Calibration : 27°C ± 5°C,
Operating : 0 to 50°C, RH < 70%
Storage : -10 to 60°C, RH < 70%
- **Dielectric Strength** — 2.5 kV at 50 Hz for 1 min. between Input - Auxiliary - Case - Terminals
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **Mounting Clamps** — Sturdy, Moulded ABS with suitable Hardware
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Model	Input		Auxiliary Power Supply (any one only)			Accuracy Class			Digits (max.)	Display Digit Height	
			110 / 230V AC	24 / 48 / 110 / 220V DC	Self (#) Powered	± 0.1 Hz	± 0.5 Hz	± 2.0 Hz	4 Digit	0.56" / 14.20mm	1.0" / 25.4mm
FDM4S / FDM964S	40 - 99.99Hz	20 - 500V AC For 110V AC or 230V AC Aux. Meters For (#) Self Powered Meters Input Variation is ±20% of Aux.	✓	-	✓	✓	✓	-	✓	✓	-
	40 - 5000Hz (Auto Ranging)		✓	-	✓	-	-	✓	✓	✓	-
FDM1444SA	40 - 99.99Hz		✓	-	✓	✓	✓	-	✓	-	✓
FDM1444SB			-	✓	-	✓	✓	-	✓	-	✓
FDM72x1444SA			✓	-	✓	✓	✓	-	✓	-	✓
FDM72x1444SB			-	✓	-	✓	✓	-	✓	-	✓
RPM4AS/ RPM964AS	300 -1500RPM for 10 - 50Hz		✓	-	✓	-	✓	-	✓	✓	-

Dimensions (mm)				
Model	FDM4S RPM4AS	FDM964S RPM964AS	FDM72X1444SA FDM72X1444SB	FDM1444SA FDM1444SB
Front	48 x 96	96 x 96	72 x 144	144 x 144
Depth (Behind Bezel)	88	90	93	72
Panel Cut-Out	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$68^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$

Ordering Information: Model, Input Frequency Range / RPM Range (for RPM Meter), Input Voltage, Auxillary Supply, Accuracy Class, Digits & Display Digit Height

Terminal Connection

FDM72x1444SA (AC Aux.) / FDM72x1444SB (DC Aux.)

FDM1444SB (DC Aux.) / FDM1444SA (AC Aux.)

FDM4S / FDM964S / RPM4AS / RPM964AS

Double Voltmeter
Double Frequency Meter

CE

FDM964SD

SMP9635SD

SMP14445D, SMP14445SD

FDM1444SAD, FDM1444SBD

Specifications

- **Measuring Method** — Dual Slope A/D Conversion (Voltmeter) Interval Measurement Method using Microcontroller (Frequency Meter)
- **Display Type** — Red LED Super Bright Display
- **Maximum Display** — 19999 Counts (Voltmeter) 9999 Counts (Frequency Meter)
- **Maximum Overload** — Voltage : 1.2 times continuous Current : 2 times continuous
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Input - Auxiliary Case - Terminals
- **Frequency Response** — 40 - 400Hz (Voltmeter)
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **VA Burden (Typical) Per Display** — Auxiliary : < 5VA Voltage Input : < 0.1VA Current Input : < 0.5VA
- **Environment** — Calibration : 27°C ± 5°C, Operating : 0 to 50°C, RH < 70% Storage : -10 to 60°C, RH < 70%
- **Mounting Clamps** — Sturdy, Moulded ABS with Hardware
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Model	Input 1 Input 2		Range	Auxiliary Power Supply (any one only)		Accuracy Class		Digits (max.)		Display Digit Height	
				19-90V AC/DC	85-265V AC/DC	0.5	1	3½	4½	0.56"/14.2mm	1.0"/25.4mm
SMP14445D SMP14445SD	DC	Zero Supp.	4 - 20mA or 1 - 5V	✓	✓	✓	✓	-	✓	-	✓
	AC	V	0 - 20, 200, 750V	✓	✓	✓	✓	-	✓	-	✓
		I	0 - 1, 2, 5A	✓	✓	✓	✓	-	✓	-	✓
SMP9635SD	AC	V	0 - 2, 20, 200, 750V	✓	✓	✓	✓	✓	-	✓	-
		I	0 - 1, 2, 5, 20A	✓	✓	✓	✓	✓	-	✓	-
	DC	Zero Supp.	4 - 20mA or 1 - 5V	✓	✓	✓	✓	✓	-	✓	-
		I	0 - 1, 2, 5, 20A	✓	✓	✓	✓	✓	-	✓	-

Model	Input 1 Input 2		Auxiliary Power Supply (any one only)			Accuracy Class			Digits (max.)	Display Digit Height	
			110 / 230V AC	24 / 48 / 110 / 220V DC	Self Powered	±0.1 Hz	±0.5 Hz	±2.0 Hz	4 Digit	0.56" / 14.20mm	1.0" / 25.4mm
FDM1444AD	40 - 99.99Hz	Please Refer Note	✓	-	✓	✓	-	-	✓	-	✓
FDM1444BD			-	✓	-	✓	-	-	✓	-	✓
FDM964SD	40 - 99.99Hz		✓	-	✓	✓	✓	-	✓	✓	-
	40 - 5000Hz		✓	-	✓	-	-	✓	✓	✓	-

Note : Input 20 - 500V AC For 110V AC or 230V AC or DC Aux. and For Self Powered Input variation is ± 20% of Aux.

Dimensions (mm)

Model	SMP9635SD	FDM964SD	SMP14445D SMP14445SD	FDM1444AD / FDM1444SAD FDM1444BD / FDM1444SBD
Front	96 x 96	96 x 96	144 x 144	144 x 144
Depth (Behind Bezel)	90	90	130 / 93	130 / 93
Panel Cut-Out	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$

Ordering Information : Model, (Voltmeter/Ammeter) : Input Range, PTR/CTR (if any), Scale Display, Auxillary Supply & Accuracy Class
(Frequency Meter) : Input Frequency Range, Input Voltage, PTR (if any), Auxillary Supply & Accuracy Class

Terminal Connection

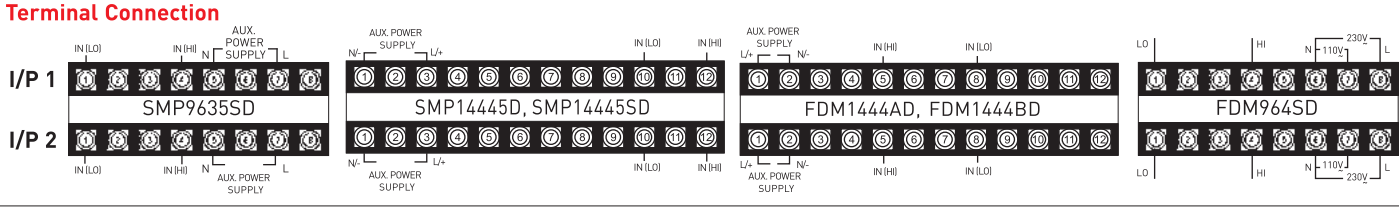

Digital Power Factor Meter (with Built-in Transducer)

CE

DPF9611S, DPF9631S

DPF72x14411, DPF72x14431

DPF14411, DPF14431

Specifications

- **Measuring Method** — Cosine of Phase Shift between Voltage and Current
- **Sampling Rate** — 2.5 Samples per Second
- **Display Type** — Red LED (Standard)
- **Maximum Display** — 4 Digits to indicate PF
- **Resolution** — 0.001 PF
- **Under Current Indication** — Error Code".01 " Blinking when current < 20% of Nominal is detected
- **Polarity Indication** — L (Lagging/Inductive) or C (Leading/Capacitive)
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **VA Burden (Typical)** — Auxiliary : < 5 VA
  Voltage Input : < 1.0VA / Phase
  Current Input : < 1.0VA / Phase
- **Maximum Overload** — Voltage : 1.2 times continuous
  Current : 2 times continuous
- **Environment** — Calibration : 27°C ± 5°C,
  Operating : 0 to 50°C, RH < 70%
  Storage : -10 to 60°C, RH < 70%
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Case - Terminals
- **Mounting Clamps** — Sturdy, Moulded ABS with Hardware
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Display Stability** — Within ± 2 Digits

Model	System (Phase, Element, Wire)	Input (Nominal)	Auxiliary Power Supply (any one only)			Accuracy Class		Digits (max.)	Display Digit Height	
			110 / 230V AC	24 / 48 / 110 / 220V DC	Self Powered	± 1 Degree	± 2 Degree	4 Digit	0.56" / 14.20mm	1.0" / 25.4mm
DPF9611S	1P 1E 2W	V for 1P1E2W = 110 / 230 V (P-N); V for 3P1E2W = 110 / 440 V (P-P); A = 1, 2 or 5A AC; Hz = 50Hz (V Range = ± 20% of Nominal A Range = 20 - 120% of Nominal) PF Range = 0.500 Lag (L) - 1 - 0.500 Lead (C)	✓	✓	✓	✓	✓	✓	✓	-
DPF9631S	3P 1E 2W (Balanced Load)		✓	✓	✓	✓	✓	✓	✓	-
*DPF72x14411 *DPF14411	1P 1E 2W		✓	✓	✓	✓	✓	✓	-	✓
*DPF72x14431 *DPF14431	3P 1E 2W (Balanced Load)		✓	✓	✓	✓	✓	✓	-	✓

Dimensions (mm)			
Model	DPF9611S DPF9631S	DPF72x14411 DPF72x14431	DPF14411 DPF14431
Front	96 x 96	72 x 144	144 x 144
Depth (Behind Bezel)	90	130	59
Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	68 (+0.8, -0.0) x 138 (+0.8, -0.0)	138 (+0.8, -0.0) x 138 (+0.8, -0.0)

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Auxillary Supply, Accuracy Class & Display Digit Height

Terminal Connection

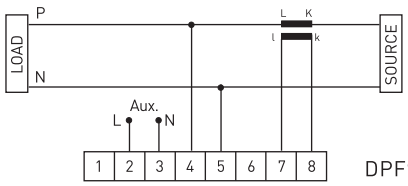

DPF9611S

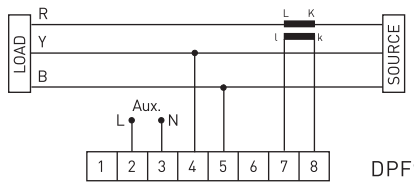

DPF9631S

***Note :** For Terminal Connection of DPF72x14411, DPF14411, DPF72x14431, DPF14431 Please Refer Page 43

Digital Wattmeter / Varmeter (with External Transducer)

CE

SMPW35S, SMPV35S

SMPW9635S, SMPV9635S

SMPW35,SMPV35, SMPW96x28845, SMPV96x28845

SMPW72x14445, SMPV72x14445 SMPW72x14445S, SMPV72x14445S

SMPW14445, SMPV14445 SMPW14445S, SMPV14445S

Specifications

MECO 1-Phase & 3-Phase Digital Watt / Var Meters (with External Transducer) are available in Sizes 48 x 96 / 96 x 96 / 72 x 144 / 144 x 144mm / 96 x 288mm etc. with choice of AC / DC Aux. Supply and Display of Digit Height 0.56 / 1 / 2.3 inches. For detailed specifications, please refer catalog of Digital Panel Meters and respective pages of DIN Transducers. Below are listed some of the more popular Models. However several other types of V, A, W, Var, PF, Hz etc. meters with External Transducers are also available. For more details please refer to our sales@mecoinst.com

Display / Digits (max.)		3½ Digits, 1999 Counts		4½ Digits, 19999 Counts		
Display Height		14.2mm / 0.56"		25.4mm / 1"		58mm / 2.3"
Type	**System**	48 x 96mm	96 x 96mm	72 x 144mm	144 x 144mm	96 x 288mm
Watt Meter	1P1E2W	**SMPW3511S**	**SMPW963511S**	**SMPW72x1444511/S**	**SMPW1444511/S**	**SMPW96x2884511**
	3P1E2W	**SMPW3531S**	**SMPW963531S**	**SMPW72x1444531/S**	**SMPW1444531/S**	**SMPW96x2884531**
	3P2E3W	**SMPW3533S**	**SMPW963533S**	**SMPW72x1444533/S**	**SMPW1444533/S**	**SMPW96x2884533**
	3P3E4W	**SMPW3534S**	**SMPW963534S**	**SMPW72x1444534/S**	**SMPW1444534/S**	**SMPW96x2884534**
Var Meter	1P1E2W	**SMPV3511S**	**SMPV963511S**	**SMPV72x1444511/S**	**SMPV1444511/S**	**SMPV96x2884511**
	3P1E2W	**SMPV3531S**	**SMPV963531S**	**SMPV72x1444531/S**	**SMPV1444531/S**	**SMPV96x2884531**
	3P2E3W	**SMPV3533S**	**SMPV963533S**	**SMPV72x1444533/S**	**SMPV1444533/S**	**SMPV96x2884533**
	3P3E4W	**SMPV3534S**	**SMPV963534S**	**SMPV72x1444534/S**	**SMPV1444534/S**	**SMPV96x2884534**
V (Any One)	Nominal Input	**For 1P1E2W : 63.5 / 230 V (P-N); For 3P1E2W : 110 / 440 V (P-P); For 3P2E3W / 3P3E4W : 110 / 440 V (P-P)**				
	Range	0 - 120% of Nominal				
A (Any One)	Nominal Input	1, 2, or 5A AC (also 10A AC for 1 Phase)				
	Range	0 - 120% of Nominal				
Hz		**Standard** : 50Hz, **Optional** : 60Hz				
PF		**Standard Range** : 0.2 Lag - 1 - 0.2 Lead				
Auxiliary Power Supply		**48 x 96mm, 96 x 96mm, 96 x 288mm** 85-265V AC/DC or 19-90V AC/DC			**72x14445S / 144x144S** 85-265V AC/DC or 19-90V AC/DC	
Accuracy (Calibrated at 27°C ±5°C)		±(0.5% of Full Scale + 2 Digits)				

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Scale Display, Auxillary Supply, Accuracy Class, Digits, Uni or Bi Directional & Display Digit Height.

Dimensions (mm)					
Model	**SMPW14445 / S**	**SMPW9635S**	**SMPW35S**	**SMPW72x14445S**	**SMPW96x28845**
Front	144 x 144	96 x 96	48 x 96	72 x 144	96 x 288
Depth (Behind Bezel)	59 / 72	90	88	93	77
Panel Cut-Out	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$44^{(+0.5,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$68^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$	$92^{(+0.8,\ -0.0)}$ x $282^{(+0.8,\ -0.0)}$
External Transducer (approx.)	As per DIN Series Transducers				

5 Digit 3P Watt / VAR / VA Meter (with Built-In Transducer) - TRMS with RS-485 Comm.
4 Digit 3P PF Meter (with Built-In Transducer) - TRMS with RS-485 Comm.



Micro Controller Based

RS 485

DWM72x144533 - TRMS DWM72x144534 - TRMS	DVM72x144533 - TRMS DVM72x144534 - TRMS	DVAM72x144533 - TRMS DVAM72x144534 - TRMS	DPF72x144433 - TRMS DPF72x144434 - TRMS

Features :

- TRMS Measurement
- 1"/25.4mm Digit Height Display
- 5 Digits 99999 Counts (Max.), Super Bright Display
- 3 Phase 3 Wire / 3 Phase 4 Wire System
- RS485 Port, 5KV Isolated with Modbus RTU Protocol (Optional)
- CE Compliance with EN61010-1, EN61326-1
- Stable & Accurate
- SMPS Power Supply
- " -VE " is Displayed to Indicate Export of Power
- Auto Indication of K & M for Kilo & Mega Respectively
- Auto Selection of Decimal Point

Model	Parameter Measured (System)	Accuracy ±(%FS)
DWM72x144533 - TRMS / DWM72x144534 - TRMS	3 Phase Active Power	±0.5%
DVM72x144533 - TRMS / DVM72x144534 - TRMS	3 Phase Reactive Power	±1.0%
DVAM72x144533 - TRMS / DVAM72x144534 - TRMS	3 Phase Apparent Power	±0.5%
DPF72x144433 - TRMS / DPF72x144434 - TRMS	3 Phase Power Factor	±1° Electrical

Specifications

Auxillary Supply	85 - 265VAC / DC (Standard)	
	19V - 90VAC / DC (Optional)	
Voltage / Phase	190V - 290VAC (Max.) (PH-N)	Any One Only
	50.8V - 96.2VAC (Max.) (PH-N)	
	330V - 500VAC (Max.) (PH-PH)	Any One Only
	88V - 132VAC (Max.) (PH-PH)	
Current / Phase	0.1A to 1.2A (Max.)	Any One Only
	0.5A to 6A (Max.)	
Frequency	45 - 55Hz	
Power Factor	0.300 Lag(L) - 1.000 - 0.300 Lead(C)	
VA Burden (Typical)		
Auxiliary	<2.5VA	
Voltage I/P	<0.5VA / Phase	

Current I/P	<0.2VA / Phase
System	3P2E3W / 3P3E4W
Standard	
Installation Category	CAT II (IEC / EN61010-1)
Pollution	Degree 2 (IEC / EN61010-1)
Environment	
Calibration	27°C ± 5°C
Operating	0 to 50°C, RH <70%
Storage	-10 to 60°C, RH <70%
Terminal Block	Screw Type
Dielectric Strength	2.5KV @ 50Hz for 1min.
Insulation Resistance	>20MOhms at 500VDC

Dimensions (mm)

Front	72 x 144 mm
Depth	130 mm
Panel Cut-Out	$68^{(+0.8, -0.0)}$ x $138^{(+0.8, -0.0)}$
Case / Housing Material	Black ABS, Dimension as per DIN 43700
Mounting	Panel
Mounting Clamps	Sturdy, Moulded Derlin with Suitable Hardware
Terminals / Connectors	Terminal Block Thermo Plastic (UL94V-0) with Tin Plated Brass Terminals

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, System 3P3E4W / 3P2E3W, CTR / PTR (if any), Auxiliary Supply & RS485 MODBUS Communication Port (Optional)

Terminal Connection

3 Phase 3 Element 4 Wire

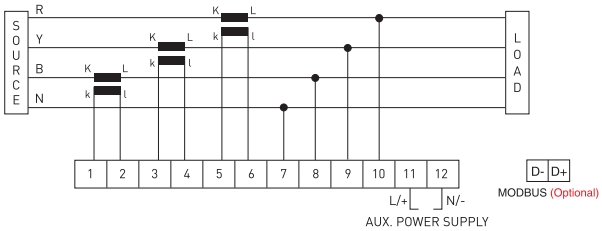

3 Phase 2 Element 3 Wire

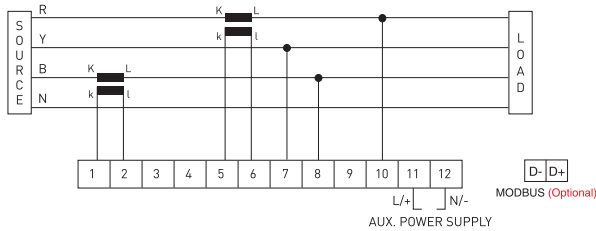

Digital Wattmeter / Varmeter (with Built-In Transducer)

CE

DWM96 / DWM144

DVM96 / DVM144

Specifications

- **Measuring Method** — Multiplication of Pulse Width and Pulse Height
- **Sampling Rate** — 2.5 Samples per Second
- **Display Type** — Red LED (Standard)
- **Resolution** — 0.001 to 1 depending on range for 3½ digit
0.0001 to 1 depending on range for 4½ digit
- **Maximum Overload** — Voltage : 1.2 times continuous
Current : 2 times continuous
- **VA Burden (Typical)** — Auxiliary : < 5 VA
Voltage Input : < 0.5VA, < 5VA for R Phase in Self Powered
Current Input : < 0.5 VA / Phase
- **Environment** — Calibration : 27°C ± 5 °C,
Operating : 0 to 50°C, RH < 70%
Storage : -10 to 60°C, RH < 70%
- **Over Range** — " 1 " or " -1 "
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Case - Terminals
- **Polarity Indication** — " - " is Displayed to indicate Export of Power
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **Mounting Clamps** — Sturdy, Moulded ABS with Hardware
- **Connectors** — For 96x96mm (Detachable Connectors)
For 144x144mm (Terminal Block) of Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Note** — Digital Watt / Var Meters with External Transducer Against Inquiry
- **Display Stability** — Within ± 2 Digits

Model	Input (Nominal) A = 1, 2 or 5A AC PF 0.2 Lag - 1 - 0.2 Lead Hz = 50Hz			Auxiliary Power Supply (any one only)			Accuracy Class		Digits (max.)		Bi Directional		Display Digit Height	
				110 / 230V AC	24 / 48 / 110 / 220V DC	Self Powered	0.5	1.0	3½	4½	Input	Display	0.56" / 14.2mm	1.0" / 25.4mm
DWM963511 DVM963511	1P 1E 2W	V Range = ± 20% of Nominal; A Range = 20 - 120% of Nominal	For 1P1E2W : 63.5 / 110 / 230 V (P-N); For 3P1E2W : 110 / 440 V (P-P); For 3P2E3W / 3P3E4W : 110 / 440 V (P-P)	✓	-	✓	✓	✓	✓	-	✓	✓	✓	-
DWM964511 DVM964511				✓	-	✓	✓	✓	-	✓	✓	✓	✓	-
DWM963531 DVM963531	3P 1E 2W (Balanced Load)			✓	-	✓	✓	✓	✓	-	✓	✓	✓	-
DWM964531 DVM964531				✓	-	✓	✓	✓	-	✓	✓	✓	✓	-
DWM963533 DVM963533	3P 2E 3W (Balanced & Unbalanced Load)			✓	-	✓	✓	✓	✓	-	✓	✓	✓	-
DWM964533 DVM964533				✓	-	✓	✓	✓	-	✓	✓	✓	✓	-
DWM963534 DVM963534	3P 3E 4W (Balanced & Unbalanced Load)			-	-	✓	✓	✓	✓	-	✓	✓	✓	-
DWM964534 DVM964534				-	-	✓	✓	✓	-	✓	✓	✓	✓	-
DWM1444511 DVM1444511	1P 1E 2W			✓	✓	✓	✓	✓	-	✓	✓	✓	-	✓
DWM1444531 DVM1444531	3P 1E 2W (Balanced Load)			✓	✓	✓	✓	✓	-	✓	✓	✓	-	✓
DWM1444533 DVM1444533	3P 2E 3W (Bal. & Unbal. Load)			✓	✓	✓	✓	✓	-	✓	✓	✓	-	✓
DWM1444534 DVM1444534	3P 3E 4W (Bal. & Unbal. Load)			✓	✓	✓	✓	✓	-	✓	✓	✓	-	✓

Digital Wattmeter / Varmeter (with Built-In Transducer) - Connection Diagram

Dimensions (mm)		
Model	**DWM9635 / DWM9645 DVM9635 / DVM9645**	**DWM14445 DVM14445**
Front	96 x 96	144 x 144
Depth (Behind Bezel)	135	59
Panel Cut-Out	$92^{(+0.8,\ -0.0)}$ x $92^{(+0.8,\ -0.0)}$	$138^{(+0.8,\ -0.0)}$ x $138^{(+0.8,\ -0.0)}$

Ordering Information: Model, Input Voltage, Input Current, Input Frequency, CTR / PTR (if any), Scale Display, Auxillary Supply, Accuracy Class, Digits, Uni or Bi-Directional Input & Display Digit Height

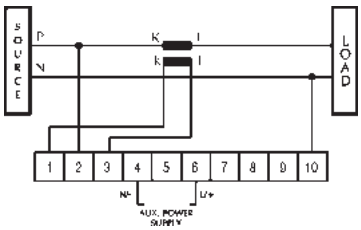

DWM9611, DVM9611

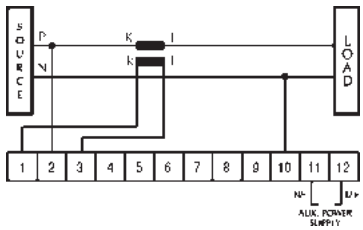

DWM14411, DVM14411

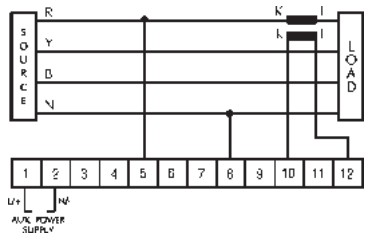

* DPF72x14411

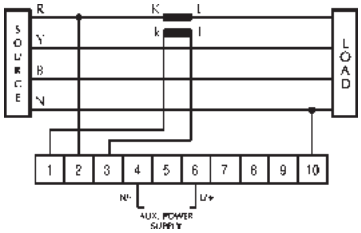

DWM9631, DVM9631

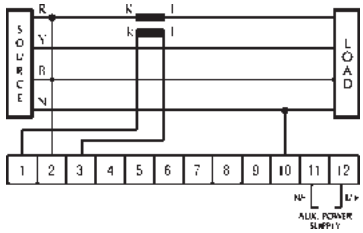

DWM14431, DVM14431

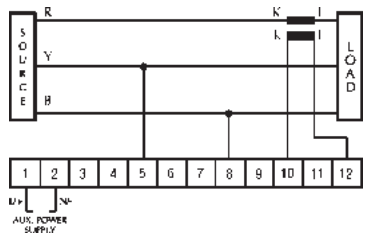

* DPF72x14431

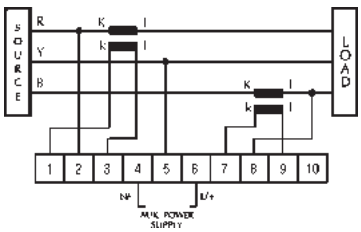

DWM9633, DVM9633

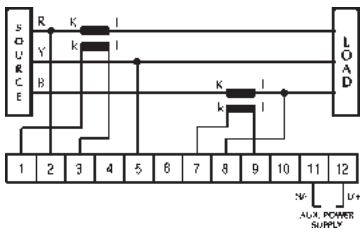

DWM14433, DVM14433

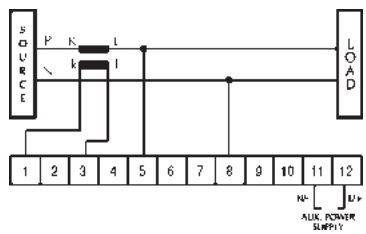

* DPF14411

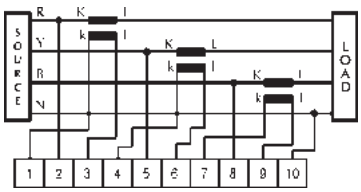

DWM9634, DVM9634

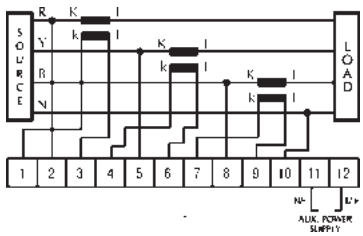

DWM14434, DVM14434

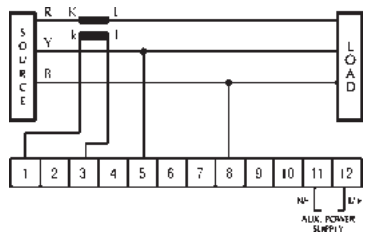

* DPF14431

***Note :** For Specifications of DPF72x14411, DPF14411, DPF72x14431, DPF14431 Please Refer Page 39

3½ Digit Ammeter / Voltmeter (5V DC Aux. Supply)

CE

SM9635SD

SM35SD

Specifications

- **Measuring Method** — Dual Slope A/D Conversion
- **Sampling Rate** — 2.5 Samples per Second
- **Display Type** — 14.2mm / 0.56" Digit Height, Red LED (Standard)
- **Maximum Display** — 1999 Counts for 3½ Digit Meters
- **Resolution** — 0.001 to 1 Count for 3½ depending on the Range
- **Polarity Indication** — " - " is indicated for Negative Input
- **Decimal Selection** — Field Selectable
- **Over Range Indication** — " 1 " or " -1 " for 3½ Digit Meters
- **Maximum Overload** — Voltage : 1.2 times continuous
Current : 2 times continuous
- **Environment** — Calibration : 27 °C ± 5 °C,
Operating : 0 to 50 °C, RH < 70%
Storage : -10 to 60 °C, RH < 70%
- **VA Burden (Typical)** — Auxiliary : < 1.0VA
Voltage Input : < 1.0VA,
Current Input : < 1.0VA
- **Faceplate / Lens** — Red Antiglare Faceplate with Annunciators
- **Dielectric Strength** — 2.5 kV at 50Hz for 1 min. between Case - Terminals
- **Case / Housing Material** — DIN Black ABS, Dimension as per DIN 43700
- **Mounting Clamps** — Sturdy, Moulded ABS with suitable Hardware
- **Connectors** — Terminal Block : Thermoplastic (UL 94V-0) with Tin Plated Brass Terminals
- **Display Stability** — Within ± 2 Digits

Display / Digits (max.)		3½ Digits, 1999 Counts	
Digit Height		14.2mm / 0.56"	
Ranges	**Input**	**SM9635SD**	**SM35SD**
DC	mV V µA mA A Zero Suppressed	0 - 200 mV 0 - 2, 20, 200, 1000 V 0 - 200 µA 0 - 2, 20, 200 mA 0 - 2, 5, 20 A 4 - 20 mA or 1 - 5 V	
Auxiliary Power Supply		**Standard**: 5VDC ± 10%	
Accuracy (Specified at 27 ± 5°C) ± (%FSD + dgt)	V DC	(0.1 + 2)	
	A DC	(0.2 + 2) in all ranges except (0.3 + 2) in 2 A & 5 A (0.5 + 2) in 20 A	
Dimensions (mm)	Front	96 x 96	48 x 96
	Depth (Behind Bezel)	90	88
	Panel Cut-Out	92 (+0.8, -0.0) x 92 (+0.8, -0.0)	44 (+0.5, -0.0) x 92 (+0.8, -0.0)

Ordering Information: Model, Input Range & Scale Display

Terminal Connection

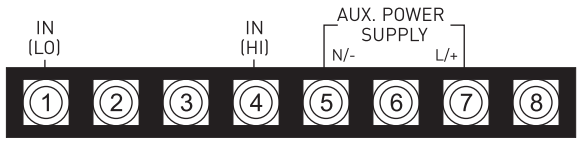

SM9635SD / SM35SD

3½ Digit Ammeter / Voltmeter (Mini Series)

CE

SM35MS

Specifications

- **Measuring Method** 3½ Digit - Dual Slope A/D Conversion
- **Sampling Rate** 2.5 Samples per Second
- **Display Type** 14.2 mm / 0.56" Digit Height Red LED
- **Maximum Display** 1999 Counts
- **Resolution** 0.001 to 1 Counts depending on the Range
- **Polarity Indication** " - " is Indicated for Negative Input
- **Decimal Selection** Field Selectable
- **Over Range Indication** " 1 " or " -1 "
- **Maximum Overload** Voltage : 1.2 times continuous
Current : 2 times continuous
- **VA Burden (Typical)** Auxiliary : <1VA
Voltage : < 0.1VA, Current : < 0.25VA
- **Environment** Calibration : 27°C ± 5°C,
Operating : 0 to 50°C, RH < 70°/0
Storage : -10 to 60°C, RH < 70%
- **Mounting** Flush Mounting
- **Connectors** Header Pins on the PCB
- **Faceplate** Red Antiglare Lens - LED
- **Display Stability** Within ± 2 Digits

Display / Digits (max.)		3½ Digits, 1999 Counts LED
Ranges	**Input**	**SM35MS**
DC	V	0 - 2, 20, 200 V
Auxiliary Power Supply		**Standard :** 5V DC + 10% **Note :** IN-LO Signal & Supply Ground may be Connected Commonly
Accuracy (Specified at 27 ± 5°C)	V DC	+ 0.5% of Full Scale
	A DC	
Dimensions (mm)	Front	79 x 42
	Depth (Behind Bezel)	24
	Panel Cut-Out	76.5 (+0.5, -0.0) x 39.5 (+0.5, -0.0)
	Drawing	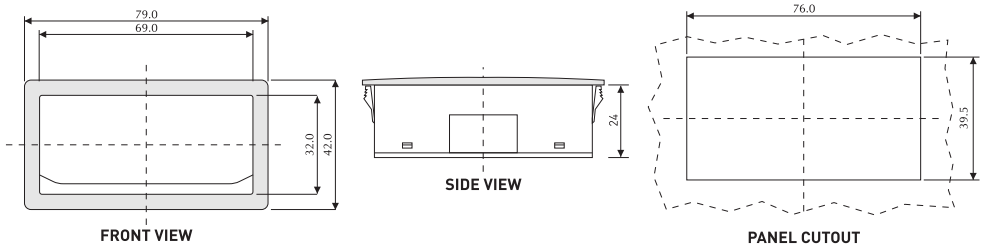

Ordering Information : Model, Input Range & Scale Display

Terminal Connection

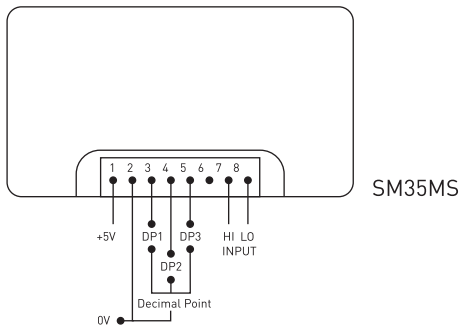

SM35MS

• Short Pin No.2 to Display Corresponding Decimal Point

3½ and 4½ Digit LCD Modules - Professional Series
3½ Digit LED Modules - Professional Series

GM035-BL

GM035, DH035

GM135

GM045

Specifications

- **Measuring Method** 3½ Digit-Dual Slope A/D Conversion
  4½ Digit-Successive Integration A/D Conversion
- **Sampling Rate** 2.5 Samples per Second
- **Display Type** 12.4 mm/0.48" Digit Height LCD for GM035, DH035, GM035-BL (with Backlight)
  11.0 mm/0.43" Digit Height LCD for GM045
  14.2 mm/0.56" Digit Height Red LED for GM135
- **Maximum Display** 1999 counts for 3½ Digit Meters
  19999 counts for 4½ Digit Meters
- **Resolution** 0.001 to 1 count for 3½ depending on the range
  0.0001 to 1 count for 4½ depending on the range
- **Polarity Indication** " - " is indicated for negative input
- **Decimal Selection** Field Selectable
- **Over Range Ind.** " 1 " or " -1 "
- **Display Stability** Within ± 2 Digits
- **Maximum Overload** Voltage : 1.2 times continuous
  Current : 2 times continuous
- **Low Batt. Indication** "LO BAT" in LCD Modules
- **External Start Hold** Provided in Models DH035 and GM045
- **VA Burden (Typical)** Auxiliary : < 20mVA (LCD) & <1VA (LED)
  Voltage : < 0.1VA, Current : < 0.25VA
- **Environment** Calibration : 27°C ± 5°C,
  Operating : 0 to 50°C, RH < 70%
  Storage : -10 to 60°C, RH < 70%
- **Mounting Bezel** Elegant Black ABS Bezel with 4 fixing screws and necessary hardware
- **Connectors** PCB Edge Connector (Optional)
- **Faceplate** Red Antiglare Lens - LED
  LCD Glass - LCD

Display / Digits (max.)		3½ Digits, 1999 Counts			4½ Digits, 19999 Counts
Ranges	**Input**	**GM035-BL**	**GM035/DH035**	**GM135**	**GM045**
DC	mV V µA mA	0 - 200 mV 0 - 2, 20, 200 V 0 - 200 µA 0 - 2, 20, 200 mA			
Auxiliary Power Supply		**Standard :** 9VDC ± 10% for GM035, GM035-BL, DH035 and GM045, 5VDC ± 10% for GM135 Note : Power Supply must be Isolated. Supply Ground must not be connected to IN-LO Signal. Please ensure when a shunt is used, it must be connected on Ground / Common side of the load and not on the Supply side.			
Accuracy (Specified at 27± 5°C) ± (% FSD + DGT)	V DC	(0.1 + 2)			(0.05 + 2)
	A DC	(0.2 + 2)			
Dimensions (mm)	Front	70.5 x 46			
	Depth (Behind Panel)	21			
	Panel Cut-Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)			
	Drawing	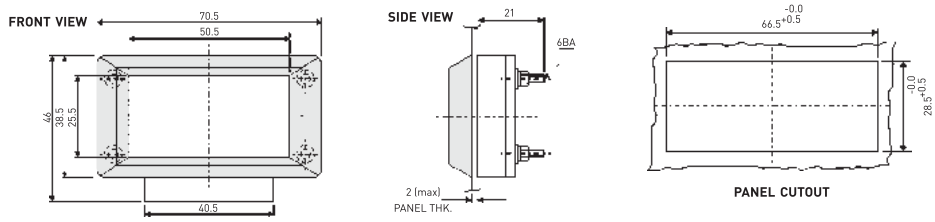			

Ordering Information : Model, Input Range & Scale Display

Terminal Connection



GM035-BL



DH035 / GM035



GM135



GM045

Note : External Start Hold - Provided for GM045 and DH035

3½ Digit LCD Modules
3½ Digit LED Modules

LC035

LC135

Specifications

- **Measuring Method** — 3 ½ Digit - Dual Slope A/D Conversion
- **Sampling Rate** — 2.5 Samples per Second
- **Display Type** — 12.4 mm/0.48" Digit Height LCD for LC035
  14.2 mm/0.56" Digit Height Red LED for LC135
- **Maximum Display** — 1999 Counts
- **Resolution** — 0.001 to 1 Counts depending on the Range
- **Polarity Indication** — " - " is Indicated for Negative Input
- **Decimal Selection** — Field Selectable
- **Over Range Indication** — " 1 " or " -1 "
- **Maximum Overload** — Voltage : 1.2 times continuous
  Current : 2 times continuous
- **VA Burden (Typical)** — Auxiliary : < 20mVA (LCD) & <1VA (LED)
  Voltage : < 0.1VA, Current : < 0.25VA
- **Environment** — Calibration : 27°C ± 5°C,
  Operating : 0 to 50°C, RH < 70%
  Storage : -10 to 60°C, RH < 70%
- **Mounting Bezel** — Elegant ABS Bezel with 2 fixing screws and necessary hardware
- **Connectors** — Header Pins on the PCB
- **Faceplate** — Red Antiglare Lens - LED
  LCD Glass - LCD
- **Display Stability** — Within ± 2 Digits

Display / Digits (max.)		3½ Digits, 1999 Counts LCD	3½ Digits, 1999 Counts LED
Ranges	**Input**	**LC035**	**LC135**
DC	mV V µA mA	0 - 200 mV 0 - 2, 20, 200 V 0 - 200 µA 0 - 2, 20, 200 mA	
Auxiliary Power Supply		**Standard**: 9VDC ± 10%	**Standard**: 5VDC ± 10%
		Note : Power Supply must be Isolated. Supply Ground must not be connected to IN-LO Signal. Please ensure when a shunt is used, it must be connected on Ground / Common side of the load and not on the Supply side.	
Accuracy (Specified at 27 ± 5°C)	V DC A DC	± 0.5% of Full Scale	
Dimensions (mm)	Front	70 x 42	
	Depth (Behind Panel)	15	21
	Panel Cut-Out	66.5 (+0.5, -0.0) x 28.5 (+0.5, -0.0)	
	Drawing	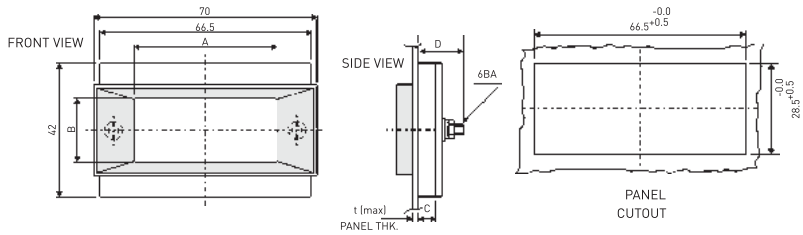	

	LC035	LC135
A	45	50
B	20	20
C	7.5	10.3
D	15	21
t	2	2

Ordering Information : Model, Input Range & Scale Display

Terminal Connection

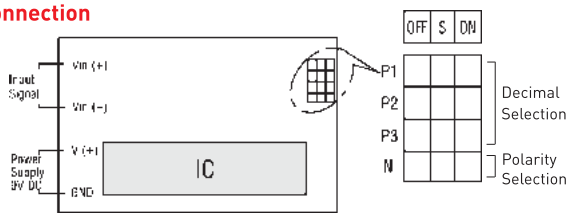

- Short S and ON to display Decimal Point, Polarity Indiactor.
- Short S and OFF to prevent display of Decimal Point, Polarity Indicator.

LC035

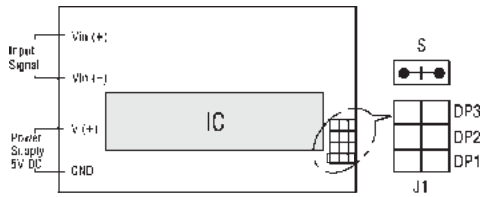

Short S to display corresponding Decimal Point.

LC135

Customer Approvals / Appreciation

BLUE STAR

Blue Star Limited
Block 2-A, DLF Corporate Park,
DLF Cyber Enclave, Phase-3,
Mehrauli-Gurgaon Road,
Gurgaon (Haryana) 122 002, India
Tel : +91 124 409 4000
Fax : +91 124 409 4004
www.BlueStarindia.com

Dt 16.12.2015

M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710
Tel. No. 022 – 27673300 Fax No. 022 – 27673310

Kind Attn Mr Haren Shah

Sub Performance of MECO Make Power Line Transducers for Delhi Metro Rail Corporation (DMRC – Delhi)

Please refer our Purchase orders to MECO Instruments Pvt. Ltd. Mahape, Navi Mumbai for Supply of MECO Make Power Line Transducers for Delhi Metro Rail Corporation (DMRC – Delhi) Projects.

Performance of MECO Make Power Line Transducers (Current, Voltage, Power Factor, Active Power, Reactive Power & Frequency Transducers) supplied to us are as per specification and working satisfactory at DMRC Sites.

We look forward to have similar kind of service and support in future also.

Thanking You,

Gaurav Khator
Blue Star Ltd, Gurgaon

Registered Office: Kasturi Buildings, Mohan T Advani Chowk, Jamshedji Tata Road, Mumbai 400 020, India Tel : +91 22 6665 4000 Fax : +91 22 6665 4157
CIN L28920MH1949PLC 006820

25 JAN 2007

पावर ग्रिड कारपोरेशन ऑफ इंडिया लिमिटेड
(भारत सरकार का उपक्रम)
POWER GRID CORPORATION OF INDIA LIMITED
(A Government of India Enterprise)
पावरग्रिड

केन्द्रीय कार्यालय : "सौदामिनी" प्लॉट नं. 2, सैक्टर-29, गुड़गाँव-122 001, हरियाणा
फोन : 2571700 - 719, फैक्स : 2571760, 2571761 तार "नेटग्रिड"
Corporate Office : "Saudamini" Plot No. 2, Sector-29, Gurgaon-122 001, Haryana
Tel. : 2571700 - 719, Fax : 2571760, 2571761 Gram : 'NATGRID'

संदर्भ संख्या/Ref. Number

C/QA&I/SV January 23, 2007

M/s Meco instruments Pvt. Ltd.,
Plot No.EL-1, MIDC Electronic Zone
TTC Industrial Area, Mahape,
Navi Mumbai-400710

Fax No. 022-27673310/27673330

Kind Attn. : **Shri Kamal Goliya (CEO)**

Sub : **Approval of MECO Make Indicating Instruments, Transducers & Meters.**

Dear Sir,

This has reference to your letter no. nil dated 17.01.2007. In this regard, we have reviewed your request and hereby convey our approval of MECO Instruments Pvt. Ltd., Mumbai (MECO make) as a vendor for supply of indicating instruments, meters (analog an digital), transducers, indicating meters with transducers under LT Panel, DG sets, AC & DC Control Panels, Miscellaneous erection items for switchyard, transformer & reactors and control & relay panel packages for POWERGRID projects. This approval will be treated in continuation to our approval accorded vide letter no. C/QA&I/SV dated 23.01.2004.

Thanking you,

Yours faithfully,

(D. CHAKRABORTY)
DY. GENERAL MANAGER (QA&I)

पंजीकृत कार्यालय : बी-9, कुतब इन्स्टीट्यूशनल एरिया, कटवारिया सराय, नई दिल्ली-110016 दूरभाष : 26560121 फैक्स : 011-26560039 तार "नेटग्रिड"
Registered Office : B-9, Qutab Institutional Area, Katwaria Sarai, New Delhi-110016 Tel. : 26560121 Fax : 011-26560039 Gram : NATGRID

GE
Intelligent Platforms

CIN: U72200KA1997PTC022158
Velankani Tech Park, No.43
1st floor, Building 9
Electronics City, Hosur Road
Bangalore 560 100
Website: www.ge.com
T: + 91 80 4251 5300-04
F: + 91 80 4251 5305-06

Ref: Vendor/Appraisal/15-16

Date : 01/15/2015.

To,
M/S. Meco Instruments Pvt. Ltd.
Plot NO. EL- 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape
Navi Mumbai – 400 710.
Tel No. : 022 27673300
Fax No. : 022 27673330
Email : kamal@mecoinst.com

Kind Attn. : Mr. Kamal Goliya / P. Gawade

Sub: Vendor Appraisal

We thank you for your support extended to us for supply of various Electrical and Electronic Testing and Measuring Instruments and Transducers.

We have been using MECO Multifunction Meters, Digital Panel Meters, Power Line Transducers, Testing and Measuring Instruments. Since more than past 5 years in our DMRC projects to our complete satisfaction.

The presales and post-sales service and support offered are prompt and timely.

We hope to have similar support from your organization for future years too so that we can all mutually achieve higher targets.

We once again thank you for your support extended to fulfill our customer needs.

Yours faithfully,
For GE Intelligent Platforms Pvt Ltd,

Gunasheela KM
Sourcing Leader

Registered Office: GE Intelligent Platforms, CIN: U72200KA1997PTC022158, Velankani Tech Park, 1st Floor, Building 9, 43, Electronics City, Hosur Road, Bangalore - 560 100, India, T: + 91 80 4251 5300-04, F: + 91 80 4251 5305-06

Raychem RPG Limited
(Industrial Electronics Division)

R-508, TTC Industrial Area, MIDC, Rabale, Navi Mumbai 400 708
Tel. (022) 5616 6315, 5616 6319, 5616 6504 Fax: (022) 2764 2444
E-mail: customercare@raychemrpg.com Website: www.raychemrpg.com

30.03.2007

To,
Meco Instruments Pvt. LTD.
El-1, MIDC, Electronics Zone,
Mahape, Navi Mumbai

Attn: Mr.Kamal Goliya

Dear Sir,

We are glad to inform you that we are very much satisfied with the performance of your panel meters, testing equipments, & especially the transducers, which we have installed at various location across India & in Export market.

We hope that the same support will be extended to us in future also, as it will strengthen our business relations.

Once again thanks to all your team!

Thanks & warm regards,
For RAYCHEM RPG LTD.

(Mahesh Janye)
Procurement

Regd. Office: Ceat Mahal Annexe, 463, Dr. Annie Besant Road, Mumbai 400 030, India.
Tel.: (022) 2493 7485 / 6 / 7 Fax: (022) 2493 6879

MECO®

SINCE 1962

Power Line Transducers

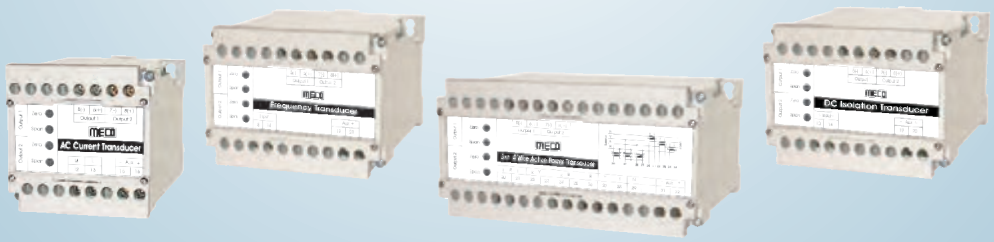

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Power Line Transducers - Introduction

Introduction

MECO Power Line Transducers were designed by MICRO DENSHI CORPORATION of Japan for AC Power Line parameters like Voltage, Current, Wattage, Var, Power Factor, Frequency, DC Isolation, and TAP Position.

These reliable and accurate Transducers are in applications in all sectors of the power and process industry since over 15 years.

These Transducers give a load independent and isolated DC output directly proportional to the input parameters.

MECO Transducers are widely used for automation and control of the power and process systems as well as for local and remote monitoring of the electrical parameters at every stage of electricity generation, transmission & distribution. They are ideal for SCADA, energy management, telemetering, data-logging as well as central monitoring systems.

MECO Transducers are generally designed to comply to the requirements of IEC 688 / EN 60688, EN 61010-1, EN 61326-1 and I.S. 12784 (Part 1). All MECO Transducers pass through a stringent manufacturing and in-house quality control process consisting of vibration, burn-in and calibration tests to ensure complete reliability and accuracy during the continuous operation.

MECO Transducers can also be supplied mounted in Panel with complete wiring and accessories upto termination point for applications in various industries like Power Utilities, SEB's, Cement, Steel, Aluminum, Chemicals, Fertilizers, Sugar, Petrochemicals etc.

Features

- Terminal Protection Cover
- Reliable & Rugged Static Circuits
- Low Ripple in Output Signal
- Flame Retardant Polycarbonate Case
- Choice of Multiple Asymmetrical Outputs
- Wide Choice of Suppressed Ranges
- Open and Short Circuit Protection for Outputs
- Dual Output (Non Isolated)
- Self-Powered, AC, DC, SMPS Auxillary Supply
- Din Rail Mounting
- Bi-Directional Outputs
- Fast Response Time
- Bi-Directional Inputs for Import / Export

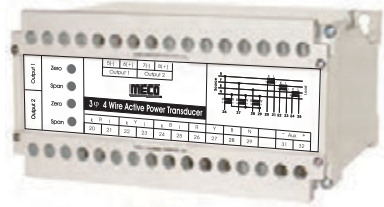

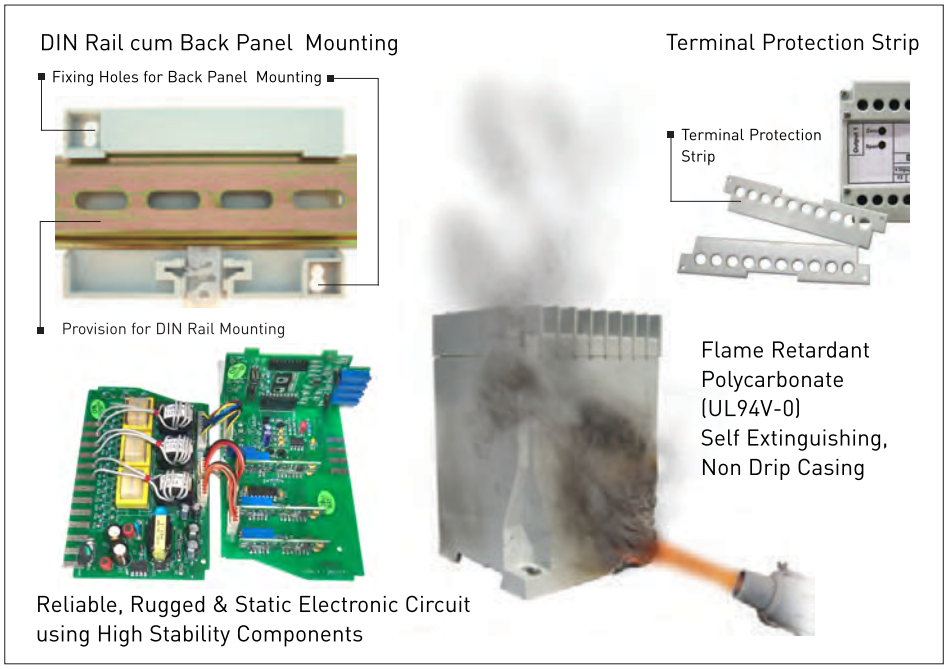

Types

- AC Current (Average / TRMS)
- AC Voltage (Average / TRMS)
- Frequency
- Active Power (TRMS) (1P & 3P - Balanced or Unbalanced System)
- Reactive Power (TRMS) (1P & 3P - Balanced or Unbalanced System)
- Power Factor (Zero Crossing / TRMS) (1P & 3P - Balanced or Unbalanced System)
- DC Isolation for Voltage & Current
- Tap Position / OLTC

Sr.	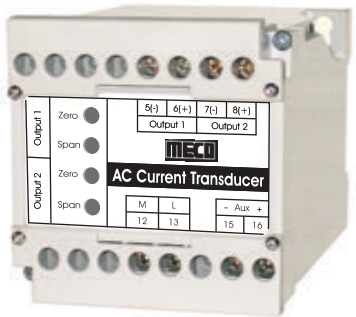 DIN Series	Auxilliary Power Supply			Type of Input		Type of Output				Isolation	Other		
		230V AC	SMPS - LV (19-90V AC / DC) SMPS - HV (85-265V AC / DC)	Self Powered	Bi Directional	Expanded / Suppressed	Single / Dual (Symmetrical / Asymmetrical)	Dual (Non-Isolated)	Bi-Directional	Expanded / Suppressed	2.5KV Between Input / Output / Aux. / Case	Average	TRMS	External Zero & Span Adjustment
1	**AC Current**	✓	✓	✓	NA	✓	✓	✓	NA	✓	✓	✓	✓	✓
2	**AC Voltage**	✓	✓	✓	NA	✓	✓	✓	NA	✓	✓	✓	✓	✓
3	**W / KW / MW (1P 1E 2W) - TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
4	**W / KW / MW (3P 1E – Balanced Load)- TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
5	**W / KW / MW (3P 2E 3W – Balanced & Unbalanced Load)- TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
6	**W / KW / MW (3P 3E 4W – Balanced & Unbalanced Load)- TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
7	**Var / KVar / MVar (1P 1E 2W) - TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
8	**Var / KVar / MVar (3P 1E – Balanced Load)- TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
9	**Var / KVar / MVar (3P 2E 3W – Bal. & Unbal. Load) - TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
10	**Var / KVar / MVar (3P 3E 4W – Bal. & Unbal. Load) - TRMS**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓	✓
11	**Frequency Transducer**	✓	Under development, Please inquire with sales@mecoinst.com	✓	NA	NA	✓	✓	NA	✓	✓	✓	NA	✓
12	**PF (1P 1E 2W) - Zero Crossing**	✓		✓	✓	NA	✓	✓	✓	✓	✓	✓	NA	✓
13	**PF (3P 1E 2W – Balanced Load) - Zero Crossing**	✓		✓	✓	NA	✓	✓	✓	✓	✓	✓	NA	✓
14	**PF (3P 2E 3W – Balanced & Unbalanced Load)- TRMS**	✓		✓	✓	NA	✓	✓	✓	✓	✓	NA	✓	✓
15	**PF (3P 3E 4W – Balanced & Unbalanced Load)- TRMS**	✓		✓	✓	NA	✓	✓	✓	✓	✓	NA	✓	✓
16	**DC Isolation / DC-DC Coverter for Current and Voltage**	✓	✓	NA	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓
17	**TAP Position Transducer**	✓	✓	NA	NA	✓	✓	✓	NA	✓	✓	✓	NA	✓

Note : ✓ Indicates choice of Standard / Optional features possible for DIN Series. Please specify your requirement of all Standard / Optional specifications clearly at the time of ordering. NA denotes not applicable.

Specifications

Accuracy	± 0.5% of Span (standard) Others on request (optional)
Accuracy Range	0 to 120%
Zero Adjustment	± 2% of Span (min.)
Span Adjustment	± 10% of Span (min.)
Response Time	< 250 ms for 0 to 90% of Output < 1 s for 0 to 90% of Output for PF
Output Ripple	< 0.5% of Full Scale
Compliance Voltage	12VDC (max.)
Overload - Continuous	Voltage : 1.2 x Un Current : 2 x In
Overload - Short Duration (1 sec.)	Voltage : 2 x Un Current : 20 x In
Max. Open Circuit Voltage	< 30VDC
Stability	± 0.25% Per Annum, Non Cumulative
Environmental Conditions	As per IEC 688 User Group II
Operating Temperature	0 to 55°C, RH < 95% (non condensing)
Storage Temperature	-20 to 70°C, RH < 95% (non condensing)
Calibrated At	27°C ± 5°C
Temperature Coefficient	0.02% / °C
Isolation	Complete (Input/Output/Auxiliary/Case)
Insulation Resistance	>100MΩ at 500VDC
Self Powered (optional)	Max.Variation of ± 20% in input voltage

Warm Up Time	20 min. (approx.)
Dielectric Strength	2.5kV at 50 Hz for 1 min.(Standard) 4kV (Optional), across Casing - Input/Output/Auxiliary Input - Output Input - Auxiliary Output - Auxiliary
Impulse Test	5kV, 1.2 / 50 µS
Casing	
DIN Series	Flame Retardant, Polycarbonate (UL 94V-0) Self Extinguishing, Non Drip, DIN Rail cum Wall Mounting Casing
Applicable Standards	
IEC 688 / EN 60688	Electrical Measuring Tranducers for converting AC Electrical Quantities to Analog or Digital Signals
EN 61010-1	Safety requirments for Electrical Equipment for Measurement Control & Laboratory use
EN 61326-1	Electrical Equipment for Measurement Control & Laboratory use - EMC requirements
IS12784 (Part-1)1989	Electrical Measuring Transducers for converting AC Electrical Quantities into DC Electrical Quantities : General Purpose Transducer

Ordering Information

Model, Input Range, Input Voltage, Input Current, PTR, CTR, Frequency, Auxiliary Supply, Output 1, Output 2 & Optionals

Dimensions (in mm)

DIN Series

Case Size	A	B	C	D	E	F	G	H
I	75	60	112	70	35	73	50	60
II	100	85	112	70	35	73	50	60
III	150	135	112	70	35	73	50	60

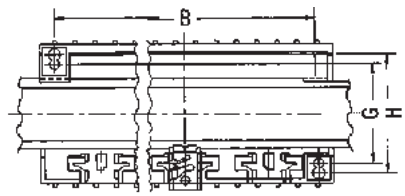



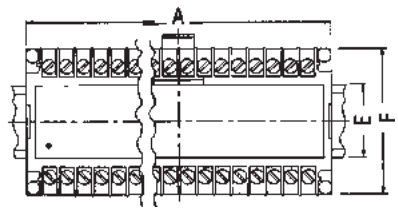

CE

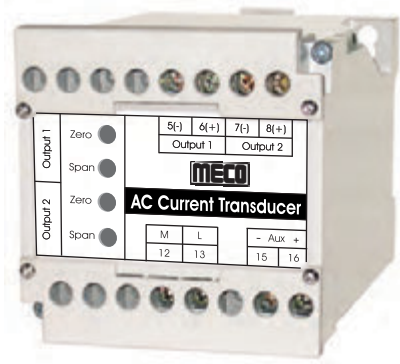

CMT, CMT - TRMS

MECO AC Current Transducers measure AC Current and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series
Current - Average	CMT
Current - TRMS	CMT - TRMS

AC Input	
Input Ranges	0 - 5A (Direct) 0 - 1A (Direct) CTR / 5A CTR / 1A
Measuring Range	0 - 1.2 In
Overload (continuous)	2 x In
Burden	<0.5 VA *2<6 VA for Self Powered

DC Output *1,*2			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance		Burden
SMPS - HV	85 - 265V AC / DC	< 2 VA
SMPS - LV	19 - 90V AC / DC	
Self *1 Powered	*1 For Input 1A & 5A AC, Output 0-10 or 0-20mA DC Available Only	Refer Input Burden
AC Linear Power Supply	230V AC ± 20 %	< 4 VA

Optional
- Expanded or Suppressed Input Ranges
  Example : 0 - 0.8 - 1.2 In
- Other input ranges available subject to technical feasibility

Optional
- Dual Non-Isolated Outputs
- Expanded / Suppressed Output
  Example : 4 - 6 - 20 mA for 0 - 0.8 - 1.2 In
- Dual Symmetrical / Asymmetrical Outputs
- Other output ranges available subject to technical feasibility

Optional
- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size II for Self Powered ● Case Size I for others

Note : ● For Case Size refer General Specifications

Connection Diagram



CMT



CMT - Self Powered

CE

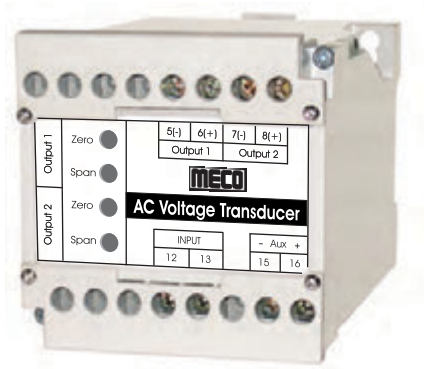

VMT, VMT - TRMS

MECO AC Voltage Transducer measures AC Voltage and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series
Voltage - Average	VMT
Voltage - TRMS	VMT - TRMS

AC Input	
Input Ranges	0 - 63.5 V 0 - 110 V 0 - 230 V 0 - 300 V 0 - 440 V 0 - 500 V
Measuring Range	0 - 1.2Un
Overload (continuous)	1.2 x Un
Burden	< Un x 6mA
	< 6 VA for Self Powered

DC Output			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance		Burden
SMPS - HV	85 - 265V AC / DC	< 2 VA
SMPS - LV	19 - 90V AC / DC	
Self Powered	Max. Variation of ± 20% allowed in Input Voltage	Refer Input Burden
AC Linear Power Supply	230V AC ± 20 %	< 4 VA

Optional
- Expanded or Suppressed Input Ranges also available. Example : 0 - 0.8 - 1.2 Un
- Above Input Ranges with suitable PTR also available·
- Other input ranges available subject to technical feasibility

Optional
- Dual Non-Isolated Outputs
- Expanded or Suppressed Output Example : 4 - 6 - 20 mA for 0 - 0.8 - 1.2 Un
- Dual Symmetrical & Asymmetrical Outputs
- Other output ranges available subject to technical feasibility

Optional
- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size I
Note : ● For Case Size refer General Specifications

Connection Diagram

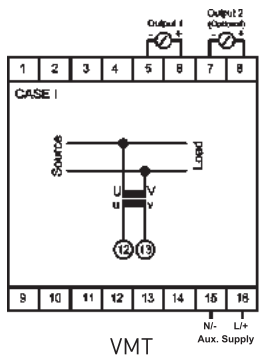

VMT

CE

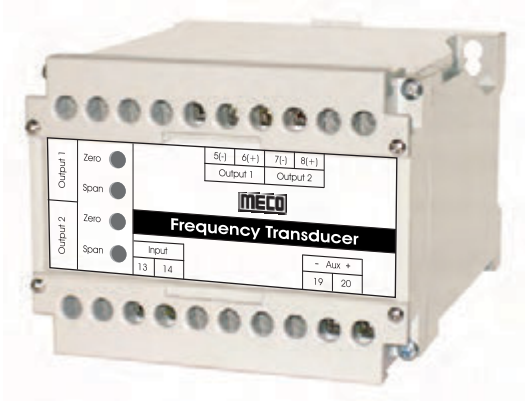

FT

MECO Frequency Transducer measures Power Frequency over a specified Frequency Range and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Model : FT (DIN Series)

AC Input	
Input Ranges	45 - 55 Hz 45 - 65 Hz 55 - 65 Hz
Input Voltage	63.5/110/230/440 V (any one only)
Measuring Range	0.8 - 1.2 Un
Overload (continuous)	1.2 x Un
Burden	< Un x 5.5mA
	< 6 VA for Self Powered

DC Output			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance (± 20 %)		Burden
AC Linear Power Supply	110 V	< 4 VA
	230 V	
DC	24 V	
	48 V	
	110 V	
	220 V	
Self Powered	Max. Variation of ± 20% allowed in Input Voltage	Refer Input Burden

Optional
- Above Input Ranges with suitable PTR also available
- Other input ranges available subject to technical feasibility

Optional
- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Other output ranges available subject to technical feasibility

Optional
- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size II

Note : ● For Case Size refer General Specifications

Connection Diagram



FT

CE

DTI

DTI - RRL

MECO DC Isolation Transducer takes various DC Voltage or DC Current signal inputs and provides a Stable, Ripple-Free and Optically Isolated DC load independent output in the form of current or voltage. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems. Model DTI - RRL has LED indication at Power ON condition.

Model : DTI (DIN Series) | **Model : DTI - RRL** (DIN Series)

DC Input

Input Ranges	0-100 mV	4-20 mA
	0-1 V	2-10 mA
	0-5 V	1-5 mA
	1-5 V	0-1 mA
	0-10 V	0-10 mA
	2-10 V	0-16 mA
	0-1000 V	0-20 mA
Measuring Range	0-1.2 In, 0-1.2 Un	
Overload (continuous)	1.2 x Un, 2 x In	
Burden	10 kOhm/V for Voltage 100 mV for Current	
Bi-directional Inputs	-50/0/50 mV DC to -300/0/300 V DC	

DC Output

Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			
4-12-20 mA	0-500 Ω	0-5-10 V	>10 kΩ

Auxiliary Power Supply

Tolerance		Burden
SMPS - HV	85 - 265V AC / DC	< 2.5 VA
SMPS - LV	19 - 90V AC / DC	
AC Linear Power Supply	110 V ± 20 %	< 4 VA
	230 V ± 20 %	

Optional
- Bi-directional Inputs available
- Other input ranges available subject to technical feasibility

Optional
- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- Other output ranges available subject to technical feasibility

Optional
- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size II

Note : ● For Case Size refer General Specifications

Connection Diagram

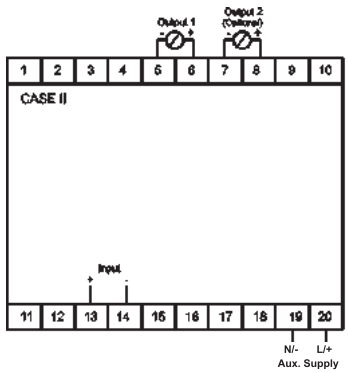

DTI / DTI - RRL

Active Power (Watt) / Reactive Power (Var) Transducer

CE

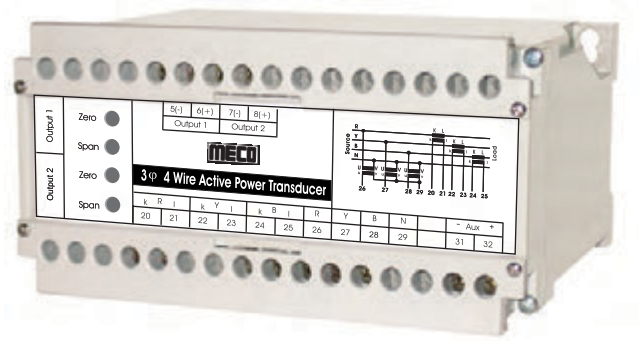

WT, RPT

MECO AC Active Power (Watt) & Reactive Power (Var) Transducers measure Power in 1 Phase, 3 Phase 3 Wire and 3 Phase 4 Wire in balanced or unbalanced electrical systems and converts it to an industry standard output signal which is directly proportional to the measured input. These Transducers provide an output which is load independent and isolated from the input. These Transducers can measure both Import and Export of Power. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Type	Watt	Var
1Phase 1Element 2Wire - TRMS	WT11	RPT11
3Phase 1Element 2Wire (Balanced) - TRMS	WT31	RPT31
3Phase 2Element 3Wire (Balanced & Unbalanced) - TRMS	WT33	RPT33
3Phase 3Element 4Wire (Balanced & Unbalanced) - TRMS	WT34	RPT34

AC Input	
Input Voltage	0-63.5/110/230/440 V (any one only)
Input Current	0-1/5 A (any one only)
Input Frequency	50/60/400 Hz (any one)
Input PF Range	0 (Lag) - 1 - 0 (Lead)
Measuring Range	0-1.2 x Un x In
Overload (continuous)	2 x In and 1.2 x Un
Burden (Voltage)	< Un x 6mA/Phase < 6 VA for Self Powered
Burden (Current)	< 0.5VA / Phase

DC Output			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance		Burden
AC Linear Power Supply	230 V ± 20%	< 4 VA
SMPS-HV	85-265 V AC/DC	< 2 VA
SMPS-LV	19-90 V AC/DC	
Self Powered	Max. Variation of ± 20% allowed in Input Voltage	Refer Input Burden

Optional
- Above Input Ranges with suitable CTR/PTR also available
- Bi-directional inputs for Import / Export of Power

Optional
- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs

Optional
- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series :
- Case Size II for 1 Phase
- Case Size III for 3 Phase

Note :
- For Case Size refer General Specifications

Connection Diagram



WT11

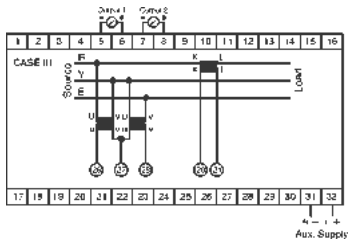

WT31

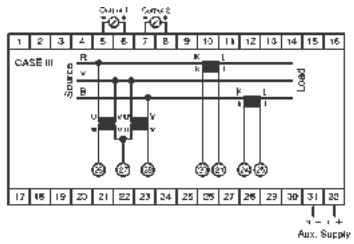

WT33/RPT33

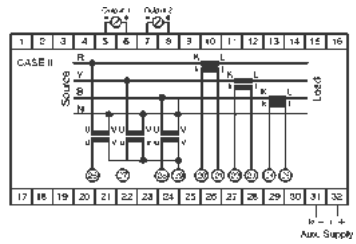

WT34/RPT34

CE

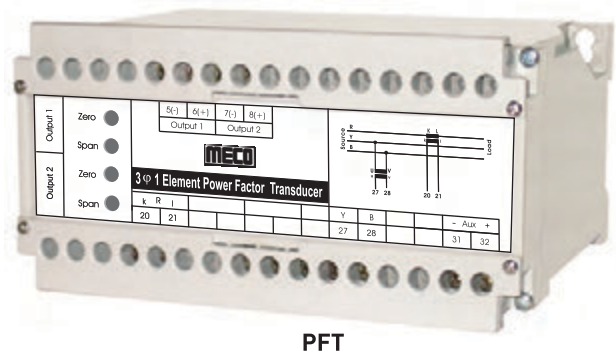

PFT

MECO AC Power Factor Transducers measure the Power Factor in 1 Phase and 3 Phase electrical systems. The resulting output signal is directly proportional to the system power factor. These Transducers provide an output which is load independent and isolated from the input. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Type	DIN Series
1Phase 1Element 2Wire - Zero Crossing	PFT11
3Phase 1Element 2Wire (Balanced) - Zero Crossing	PFT31
3Phase 2Element 3Wire (Balanced & Unbalanced) - TRMS	PFT33-TRMS
3Phase 3Element 4Wire (Balanced & Unbalanced) - TRMS	PFT34-TRMS

AC Input	
Input Voltage	63.5/110/230/440 V (any one only)
Input Current	1/5 A (any one only)
Input Frequency	50/60 Hz (any one)
Input PF Range	0.5 (Lag) -1.0 - 0.5 (Lead)
Measuring Range	0.8Un~1.2Un, 0.2In~1.2In
Overload (continuous)	2 x In and 1.2 x Un
Burden (Voltage)	< Un x 6mA/Phase < 6 VA for Self Powered
Burden (Current)	< 0.5VA / Phase

DC Output			
Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply		
Tolerance (± 20 %)		Burden
AC Linear Power Supply	110 V	< 4 VA
	230 V	
DC	24 V	
	48 V	
	110 V	
	220 V	
Self Powered	Max. Variation of ± 20% allowed in Input Voltage	Refer Input Burden

Optional

- Above Input Ranges with suitable CTR/PTR also available
- Bi-directional inputs for Import / Export of Power

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs

Optional

- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size III

Note : ● For Case Size refer General Specifications

Connection Diagram

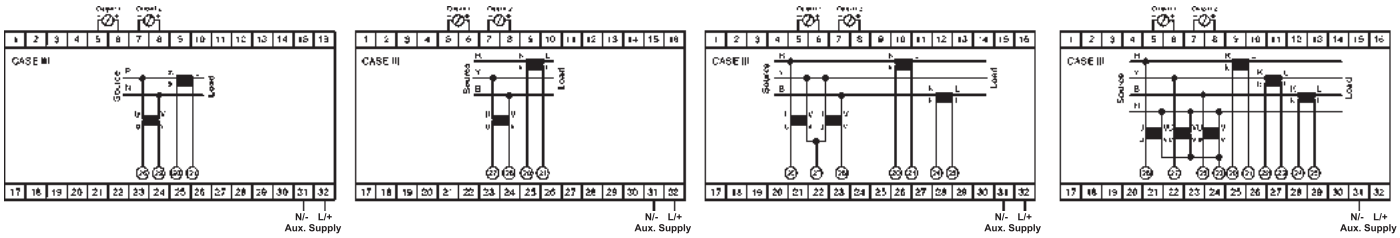

PFT11 PFT31 PFT33 PFT34

CE

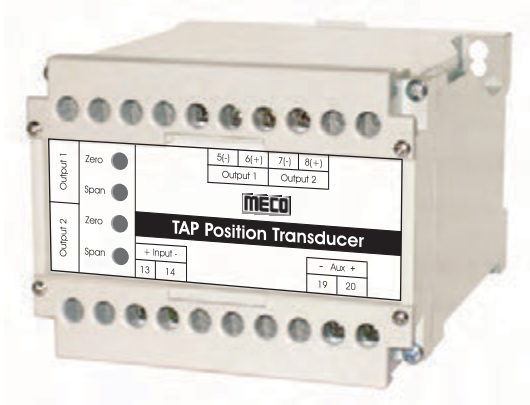

TPT

MECO Tap position Transducer takes various Resistance inputs and provides a Stable, Ripple-Free and Optically Isolated DC load independent output in the form of current or voltage. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetering for Remote, Local as well as Central Monitoring Systems.

Model : TPT (DIN Series)

Resistance Input

Resistance input from potentiometric transformer tap positions upto 99 transformer taps. 100 KOhms max.

DC Output

Current		Voltage	
Output	Load	Output	Load
0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ
0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ
0-10 mA	0-1 KΩ	1-5 V	
2-10 mA		0-10 V	>10 kΩ
0-20 mA	0-500 Ω	2-10 V	
4-20 mA			

Auxiliary Power Supply

Tolerance		Burden
SMPS - HV	85 - 265V AC / DC	< 2.5 VA
SMPS - LV	19 - 90V AC / DC	
AC Linear Power Supply	110 V ± 20 %	< 4 VA
	230 V ± 20 %	

Optional

- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- Other output ranges available subject to technical feasibility

Optional

- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ● Case Size II

Note : ● For Case Size refer General Specifications

Connection Diagram

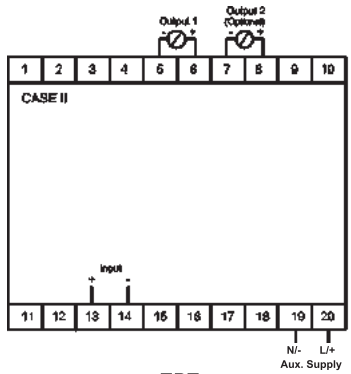

TPT

25 JAN 2007

पावर ग्रिड कारपोरेशन ऑफ इंडिया लिमिटेड
(भारत सरकार का उद्यम)
POWER GRID CORPORATION OF INDIA LIMITED
(A Government of India Enterprise)
पावरग्रिड

केन्द्रीय कार्यालय : "सौदामिनी" प्लॉट सं. 2, सैक्टर-29, गुडगाँव-122 001, हरियाणा
फोन : 2571700 - 719, फैक्स : 2571760, 2571761 तार 'नेटग्रिड'
Corporate Office : "Saudamini" Plot No. 2, Sector-29, Gurgaon-122 001. Haryana
Tel. : 2571700 - 719, Fax : 2571760, 2571761 Gram : 'NATGRID'

संदर्भ संख्या/Ref. Number

C/QA&I/SV

January 23, 2007

M/s Meco instruments Pvt. Ltd.,
Plot No.EL-1, MIDC Electronic Zone
TTC Industrial Area, Mahape,
Navi Mumbai-400710

Fax No. 022-27673310/27673330

Kind Attn. : **Shri Kamal Goliya (CEO)**

Sub : **Approval of MECO Make Indicating Instruments, Transducers & Meters.**

Dear Sir,

This has reference to your letter no. nil dated 17.01.2007. In this regard, we have reviewed your request and hereby convey our approval of MECO Instruments Pvt. Ltd., Mumbai (MECO make) as a vendor for supply of indicating instruments, meters (analog an digital), transducers, indicating meters with transducers under LT Panel, DG sets, AC & DC Control Panels, Miscellaneous erection items for switchyard, transformer & reactors and control & relay panel packages for POWERGRID projects. This approval will be treated in continuation to our approval accorded vide letter no. C/QA&I/SV dated 23.01.2004.

Thanking you,

Yours faithfully

(D. CHAKRABORTY)
DY. GENERAL MANAGER (QA&I)

पंजीकृत कार्यालय : बी-9, कुतब इंस्टीट्यूशनल एरिया, कटवारिया सराय, नई दिल्ली-110016 दूरभाष : 26560121 फैक्स : 011-26560039 तार 'नेटग्रिड'
Registered Office : B-9, Qutab Institutional Area, Katwaria Sarai, New Delhi-110016 Tel. : 26560121 Fax : 011-26560039 Gram : 'NATGRID'

MECO®

SINCE 1962

Analog Panel and Switchboard Meters

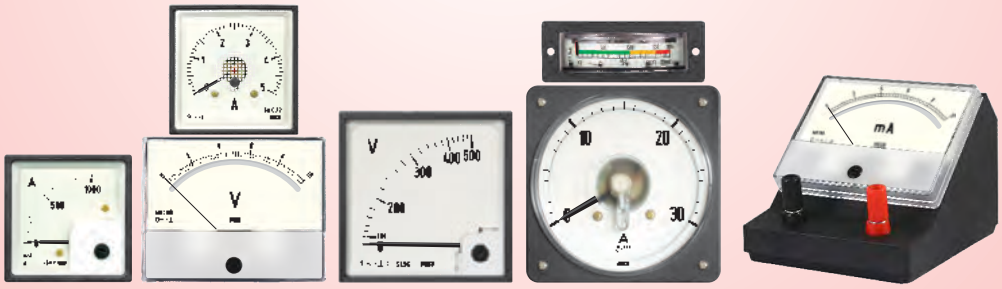

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

General Specifications

Standards

All instruments are designed in accordance with the following international and national regulations : IS-1248; IEC-51; IEC-1010; BS89; EN60051 respectively various instruments. The overall dimensions comply with DIN43700 - 43718.

Technical Specifications

Materials

Case : Complies to DIN 43700
Colour : White
Front Frame : Complies with DIN 43718
Colour : Black
Front Glass : Flat glass

Protection

Case : IP52
Terminals : IP00
IP20 (with terminal cover)

Overload Capabilities

Withstand continuous overloads of 1.2 times for Ammeter and Voltmeter the nominal value and short duration overloads of upto 10 times for Ammeter and upto 2 times for Voltmeter the nominal values for 5 seconds.

Climatic Conditions

Reference temperature for these instruments is 27°C ± 2°C. The standard instruments can operate at a maximum relative humidity of 90%.

Operating Temperature

-10°C to + 55°C, RH<90%

Storage Temperature

-20°C to + 70°C, RH<90%

Accuracy Class

All instruments are calibrated according to Accuracy Class specified below as per applicable international standards :

- Moving Iron Meters : 1.5
- Moving Coil Meters : 1.0, 1.5, 2.5
- Electronic Analog Watt / Var Meters : 1.5/1.0
- Power Factor Meters : ±2° Phase Angle
- Frequency Meters : 1.0

Influence of External Magnetic Fields

Moving Iron Meters are provided with an internal shield cup in order to prevent the influence of stray and low intensity magnetic fields.

Moving Coil and all other instruments have a center core self-shielding construction which protects against stray and external low intensity magnetic fields.

Mounting Position

The nominal operating position of the panel meters is vertical. The required mounting position is shown on the scale of the instrument. Instruments with horizontal and angular mounting positions can be supplied on request.

High Voltage Test

All instruments are designed to withstand 2.5kV RMS, 50Hz, for 1min.

Shock and Vibration Resistance

All meter movements are mounted on spring loaded shock absorbing type of jewel bearings which make the instrument capable of offering good resistance to shocks and vibration. This mechanism is much superior to traditional Taut-Band construction which is highly fragile. The Pivot Jewel mechanism is ideal for aviation, traction and marine applications.

Pointer

The pointers are in accordance with DIN 43802.

Zero Adjustment

A screw for zero adjustment is located on the front glass.

Scales

Instrument scales are in accordance with DIN43802 regulations. Special scales are available on request.

Markings and Symbols on Instruments / Meters

According to IEC51 requirements, all measuring instruments and their accessories bear on the dial, or on the external surface of the case, the markings indicating :

- Manufacturers name or trade mark
- Symbol of the measured parameter
- Accuracy / Accuracy Class
- Type of power supply and the number of measuring elements
- Test Voltage
- Operating method of the instrument
- Rated value
- Symbol for mounting position
- Symbol of the accessory or the transformer ratio for which the instrument has been calibrated.

Moving Iron Meters

These instruments consist of a moving piece of ferro magnetic material, which is under influence of a current carrying fixed coil. Considering the above mentioned operating process, these instruments are ideally suited for measuring TRMS current and voltage in alternating current circuits. Accuracy for these meters is applicable only within the nominal working range and not in the overscale range. When using external current transformer, please ensure that the secondary current value of the CT must be the rated current of the Ammeter i.e., In.

Moving Coil Meters

The operation of these instruments depends on the reaction of the current circulating in a moving coil and the field of a fixed permanent magnet. They can be used on alternating current with a suitable rectifier inserted in the circuit.

Moving Coil instruments above 50A, the ammeters are to be used with external Shunts having 60mV or 75mV drop. The Shunts are usually calibrated for a lead resistance of usually less than 0.07 Ohm. When lead resistance is greater than 0.1 Ohm, it is advisable to use shunts of 100, 150 or 300mV drop.

Electronic Analog Watt, Var, PF & Hz Meters

These instruments are available for measuring Active and Reactive Power in single phase and three phase balanced or unbalanced load conditions. In addition to these we manufacture Power Factor Meters for single phase and three phase balanced load systems and line Frequency meters for different voltage ratings and different frequency bands.

Electronic Power meters use multiplier circuits which multiply instantaneous voltage and current.

The average of the product is in the form of analog DC current directly proportional to the AC power. This power is measured with DC moving coil meter. Scale is adjusted to indicate power. Sometimes these meters are used along with CTs and PTs. Bi-directional Watt/Var Meters to indicate export / import can be supplied on request.

In Frequency meter a DC current proportional to the input frequency is obtained by using an electronic circuit. This output is calibrated in terms of frequency.

The circuit for Powerfactor meter gives current output proportional to phase angle. This output is bidirectional to discriminate between leading and lagging Powerfactor. Scale is marked in terms of Cosφ, φ being the phase angle between voltage and current vector.

Since these Watt meters and Var meters are self powered, it is essential that the input voltage is within ±15% of the nominal value. At lower voltage, the instrument will function erratically.

To get proper accuracy from Powerfactor meter, please ensure input voltage is within ±15% of the rated value & current is between 20% to 120% of the rated value.

Note

Power meters and Powerfactor meters are normally supplied for 47 to 53 Hz operation. On request meters to suit 60Hz or 400 Hz can be supplied.

Active power, Reactive power & Low Powerfactor Wattmeter are calibrated at Cosφ = 1, Sinφ = 1 and Cosφ = 0.2 Lag respectively.

Burden

Electronic meters impose lower burden on supply than the conventional meters. Typical values are given below.

Watt & Var Meters

Voltage Rating	Total Burden(VA)
1-Phase, 63.5V	< 0.5
1-Phase, 230/250V	< 2.0
3-Phase, 110V	< 3x0.5
3-Phase, 400/440V	< 3x2.0

Current Rating	Total Burden (VA)
1.0A	< 1VA/Phase
5.0A	< 1VA/Phase

Powerfactor Meters

Voltage Rating	Total Burden (VA)
1-Phase, 63.5V	< 0.25
1-Phase, 230/250V	< 1.0
3-Phase, 110V	< 0.4
3-Phase, 400/440V	< 1.5

Current Rating	Total Burden (VA)
1.0 A	< 0.5
5.0 A	< 0.5

Frequency Meters

Voltage Rating	Total Burden (VA)
63.5V	< 0.7
110V	< 1.2
230/250V	< 2.5
400/440V	< 4.5

Scale

Watt & Var Meters

Upper limits of measuring range is one of the decimal or subdecimal values from the following,

1, 1.2, 1.5, 2, 2.5, 3, 4, 5, 6, 7.5 & 8.

In the interest of standardisation it is recommended that the maximum value of the measuring range is chosen accordingly. Following examples will illustrate the method of working out these values.

i) Single Phase

V=250V , I = 5A, Cosφ =1

Power = V.I.Cosφ =250x5x1 = 1250W

Maximum upper limit in this case should be 1200 or 1500W.

ii) Three Phase

V = 110V, PTR = 33k V/110V

I = 5A, CTR = 500/5A, Cosφ= 1

Power = $\sqrt{3}$.V.I.Cosφ.PTR.CTR

Power = $\sqrt{3}$x110x5x1x$\frac{33x1000}{110}$x$\frac{500}{5}$

= 28.578x10 = 28.578MW

Maximum upper limit in this case should be 25MW or 30MW.

Ordering Information

Please give the following details while ordering :

Model :_____

Full Scale Range :_____

CTR :_____

Voltage (Ph-Ph or Ph-N) :_____

PTR (if any) :_____

Connection diagram number:_____

Example :

Model : 96QW32

Full Scale Range : 0-6 MW

CTR : 600/5A

Voltage Ph-Ph : 110V AC

PTR : 6.6KV/110V

Connection diagram number : 4

1

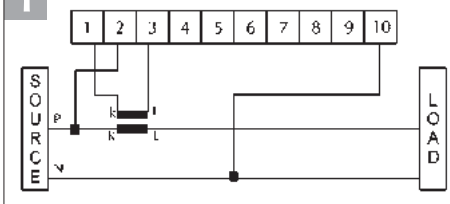

1 φ1 Element Watt Meter and Var Meter

2

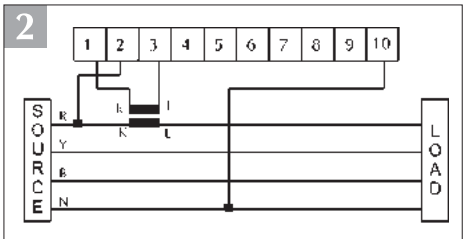

3 φ1 Element Watt Meter and Var Meter for balanced load only

3

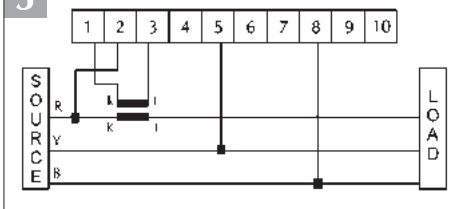

3 φ1 Element - D Type Watt Meter and Var Meter for balanced load only

4

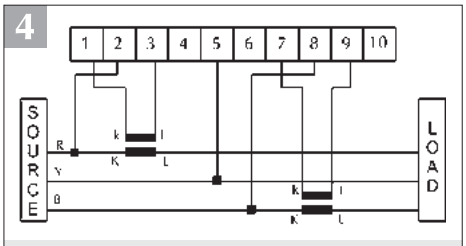

3 φ 2 Element - D Type Watt Meter and Var Meter for balanced and unbalanced load

5

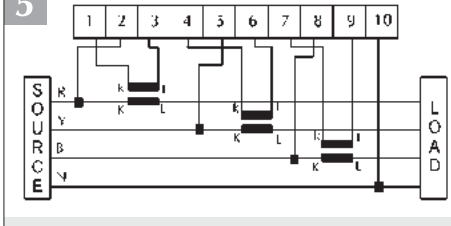

3 φ 3 Element Watt Meter and Var Meter for balanced and unbalanced load

6



Note : P=2, N=4, k=7 & l=9 only for 144LF11

1 φ 1 Element Pf Meter

7



Note : M=2, L=4, Y=7 & B=9 only for 144LF31

3 φ 1 Element Pf Meter for balanced load only

8



Frequency Meter

AC Moving Iron DIN Panel Ammeter / Voltmeter

CE

Interchangeable Scale

SQ72

SQ96

Model	SQ72, SQ96
Description	Moving iron meter of 90° deflection with interchangeable scale facility
Movement Type	Moving iron spring-mounted jewel bearing suspension
Accuracy	±1.5% of full scale as per IS 1248; EN 60051
Self Consumption	Ammeters (upto 5A AC) ≤ 0.6VA; Voltmeters (upto 500V AC) ≤ 5VA
Operating Voltage	600V RMS max.
Test Voltage	2.5KV for 1 minute at 50 Hz
Construction & Design	According to IS 1248; EN 60051
Scale	According to DIN 43802
Case/Housing Material	White ABS, dimensions as per DIN 43700
Bezel	Black ABS, dimensions as per DIN 43718
Glass Faceplate	Flat Glass
Mounting Fasteners/Clamps	Ergonomic easy mountable clamps and nuts for easy installation on Switchboards, Panels, Mosaics etc.
Temperature Conditions	– 10°C to + 55°C, RH < 90% (Operating) and – 20°C to + 70°C, RH < 90% (Storage) EN60051
Front Protection	IP52 protection as per IS2147
Terminal Protection	Back cover for IP20 terminal protection as per IS2147 (optional)

Dimension and Panel Cutout

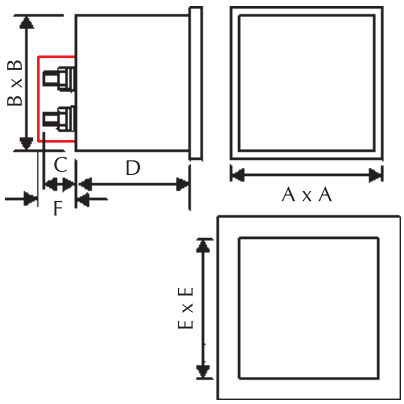

— Optional Terminal Protection Cover

Model	Dimensions (mm)					
	A	B	C Max	D	E +0.8 -0.0	F
SQ72 Voltmeter & Ammeter upto 20A	72	67	17	51.5	68	21
SQ72 Ammeter above 20A	72	67	23	51.5	68	-
SQ96 Voltmeter & Ammeter upto 20A	96	90	17	51.5	92	21
SQ96 Ammeter above 20A	96	90	23	51.5	92	-

Ammeters						Voltmeters		
1 x In (A)		2 x In (A)		6 x In (A)			with PT	
Direct	with CT	Direct	with CT	Direct	with CT	Direct	Ratio and Scale	
1A	CTR/5A	1/2A	CTR/5A	1/6A	CTR/5A			
5A	CTR/1A	5/10A	CTR/1A	5/30A	CTR/1A	50V	PTR/63.5V	
10A	10/—	10/20A	10/20/—	10/60A	10/60/—	60V	PTR/110V	10KV/—
15A	15/—	15/30A	15/30/—	15/90A	15/90/—	75V	PTR/230V	15KV/—
20A	20/—	20/40A	20/40/—	20/120A	20/120/—	100V	PTR/250V	20KV/—
25A	25/—	25/50A	25/50/—	25/150A	25/150/—	110V	PTR/400V	25KV/—
30A	30/—	30/60A	30/60/—	30/180A	30/180/—	150V	PTR/440V	30KV/—
40A	40/—	40/80A	40/80/—	40/240A	40/240/—	250V		40KV/—
50A	50/—	50/100A	50/100/—	50/300A	50/300/—	300V	1KV/—	50KV/—
60A	60/—	60/120A	60/120/—	60/360A	60/360/—	500V	1.2KV/—	60KV/—
75A	75/—	75/150A	75/150/—	75/450A	75/450/—	600V	1.5KV/—	75KV/—
80A	100/—	80/160A	100/200/—	80/480A	100/600/—	750V	2KV/—	80KV/—
100A	150/—	100/200A	150/300/—	100/600A	150/900/—		2.5KV/—	100KV/—
	250/—		250/500/—		250/1500/—		3KV/—	and higher
	400/—		400/800/—		400/2400/—		3.5KV/—	
	500/—		500/1000/—		500/3000/—		4KV/—	
	600/—		600/1200/—		600/3600/—		5KV/—	
	1000/—		1000/2000/—		1000/6000/—		6KV/—	
	1500/—		1500/3000/—		1500/9000/—		7.5KV/—	
	and higher		and higher		and higher		8KV/—	

Ordering Information: Model, Input Range, CTR/PTR, Scale

Notes

a) Double stamping / non-standard marking available.
b) Gaskets (optional) for vibration proof available.
c) Terminal protection cover (optional) on request for Voltmeter & Ammeter upto 20 A.
d) AC instruments calibrated @ 50Hz. (400Hz on request.)
e) Other ranges subject to technical feasibility.

Wiring Diagram

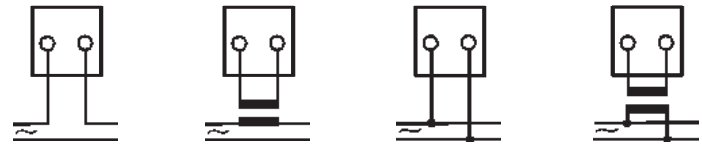

Ammeter with direct connection | Ammeter with CT | Voltmeter with direct connection | Voltmeter with PT

DC Moving Coil DIN Panel Ammeter / Voltmeter

CE

M72, M96

ML72, ML144

ML96

ML110

Model	M72, M96	Ml72, ML96, ML144, ML110
Description	Full Scale deflection 90°	Full Scale deflection 240°
Movement Type	Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension	Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension
Accuracy	± 1.5% of Full Scale	± 1.5% of Full Scale for ML96, ML144, ML110 + 2.5% of Full Scale for ML72
Sensitivity	1000Ω/V (Voltmeter); 200Ω/V (Ammeter)	1000Ω/V (Voltmeter); 200Ω/V (Ammeter)
Operating Voltage	600 V RMS max.	600 V RMS max.
Test Voltage	2.5 KV for 1 minute at 50 Hz	2.5 KV for 1 minute at 50 Hz
Construction & Design	According to IS 1248; EN 60051	According to IS 1248; EN 60051
Scale	According to DIN 43802	Accordingto DIN 43802
Casing	Size 72, 96 ABS Case with Glass Front	Size 72, 96, 144 ABS Case with Glass Front Size 110 ABS Case with Clear Polycarbonate Cover
Dimensions and Panel cutout	Refer Dimensions Page Overleaf	Refer Dimensions Page Overleaf

Ammeters				Voltmeters	
µA	mA	A*	On shunt	mV	V
	1 mA	1 A	—A/60 mV		1 V
	1.5 mA	1.5 A	—A/75 mV		1.5 V
	2 mA	2 A	—A/100 mV		2 V
	2.5 mA	2.5 A			2.5 V
	4 mA	4 A			4 V
	5 mA	5 A	5A/75 mV		5 V
	6 mA	6 A	6A/75 mV		6 V
	10 mA	10 A	10A/75 mV		10 V
	15 mA	15 A	15A/75 mV		15 V
	20 mA	20 A	20A/75 mV		20 V
	25 mA	25 A	25A/75 mV		25 V
	30 mA	30 A	30A/75 mV		30 V
	40 mA	40 A	40A/75 mV		40 V
	50 mA	50 A	50A/75 mV	50 mV	50 V
	60 mA		60A/75 mV	60 mV	60 V
	75 mA		75A/75 mV	75 mV	75 V
100 µA	100 mA		100A/75 mV	100 mV	100 V
150 µA	150 mA		150A/75 mV	150 mV	150 V
250 µA	250 mA		250A/75 mV	250 mV	250 V
400 µA	400 mA		400A/75 mV	400 mV	400 V
500 µA	500 mA		500A/75 mV	500 mV	500 V
600 µA	600 mA		600A/75 mV	600 mV	600 V
800 µA	800 mA		800A/75 mV	800 mV	800 V
			and higher		1000 V

Ordering Information: Model, Input Range, Scale

Notes

- ☐ Ranges common to M and ML Series
- ☐ All other refer to M Series only

* For ML72 DC direct current upto 1A. Above 1A use with external shunt.

a) Double stamping / non-standard / centre zero marking available.
b) Zero supp. DC ammeter for 4-20mA & voltmeter for 1-5V available.
c) Voltmeters with sensitivity 10K Ohms / V available in 90°
d) Rubber gaskets for vibration proof available.
e) Other ranges subject to technical feasibility.
f) Terminal Protection Cover (Optional) on request for all Models except ML144

Wiring Diagram



Ammeter on Shunt



Ammeter with direct connection



Voltmeter with direct connection

AC Moving Coil Rectifier Type DIN Panel Ammeter / Voltmeter

CE

C72, C96



MLC72, MLC144

MLC96

MLC110

Model	**C72, C96**	**MLC72, MLC96, MLC144, MLC110**
Description	Moving Coil measuring instruments with AC rectifier; Full Scale deflection 90°	Moving coil measuring instruments with AC rectifier; Full Scale deflection 240°
Movement Type	Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension	Moving-coil with central magnetic Core; spring-mounted bearing jewel suspension
Accuracy	± 1.5% of Full Scale	± 1.5% of Full Scale for MLC96, MLC144, MLC110 ± 2.5% of Full Scale for MLC72
Operating Voltage	600 V RMS max.	600 V RMS max.
Test Voltage	2.5 KV for 1 minute at 50 Hz	2.5 KV for 1 minute at 50 Hz
Self-Consumption	< 1 VA	< 1 VA
Frequency Range	45 Hz to 1 KHz (Voltmeter & Ammeter) 1 KHz to 10KHz (Voltmeter - Optional)	45 Hz to 1 KHz (Voltmeter & Ammeter) 1 KHz to 10KHz (Voltmeter - Optional)
Construction & Design	According to IS 1248; EN 60051	According to IS 1248; EN 60051
Scale	According to DIN 43802	According to DIN 43802
Casing	Size 72, 96 ABS Case with Glass Front	Size 72, 96, 144 ABS Case with Glass Front Size 110 ABS Case with Clear Polycarbonate Cover
Dimensions and Panel cutout	Refer Dimensions Page Overleaf	Refer Dimensions Page Overleaf

Ammeters @						Voltmeters		
1 x In (A)		2 x In (A)		6 x In (A)			On PT	
Direct	On CT	Direct	On CT	Direct	On CT	Direct	Ratio and Scale	
1A	(/-)	1/2 A	(/-)	1/6 A	(/-)			
5A	(5A or 1A)	5/10A	(5A or 1A)	5/30 A	(5A or 1A)		-V/63.5 V	
	10/-		10/20/-		10/60/-	10 V	-V/110 V	10 KV
	15/-		15/30/-		15/90/-	15 V	-V/230 V	15 KV
	20/-		20/40/-		20/120/-	20 V	-V/250 V	20 KV
	25/-		25/50/-		25/150/-	25 V	-V/400 V	25 KV
	30/-		30/60/-		30/180/-	30 V	-V/440 V	30 KV
	40/-		40/80/-		40/240/-	40 V		40 KV
	50/-		50/100/-		50/300/-	50 V	1 KV	50 KV
	60/-		60/120/-		60/360/-	60 V	1.2 KV	60 KV
	75/-		75/150/-		75/450/-	75 V	1.5 KV	75 KV
	100/-		100/200/-		100/600/-	100 V	2 KV	100 KV
	150/-		150/300/-		150/900/-	150 V	2.5 KV	
	250/-		250/500/-		250/1500/-	250 V	3 KV	
	400/-		400/800/-		400/2400/-	400 V	3.5 KV	
	500/-		500/1000/-		500/3000/-	500 V	4 KV	
	600/-		600/1200/-		600/3600/-	600 V	5 KV	
	1000/-		1000/2000/-		1000/6000/-	750 V	6 KV	
	1500/-		1500/3000/-		1500/9000/-	800 V	7.5 KV	
	and higher		and higher		and higher	1000 V	8 KV	

Ordering Information: Model, Input, CTR/PTR, Scale

Notes

a) Double stamping / non-standard marking available.
b) Rectifier type meters caliberated for AC sine wave.
c) Rubber gaskets for vibration proof available.
d) AC instruments normally caliberated at 50 Hz.
e) Other ranges available subject to technical feasibility.
f) Terminal Protection Cover (Optional) on request for all Models except MLC144
@ From 1mA to 750mA (50Hz) are also available

Wiring Diagram

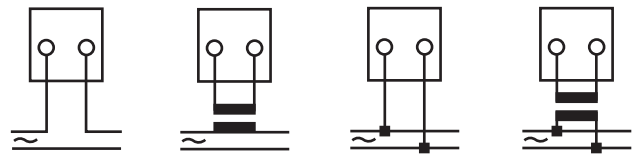

Ammeter (direct) Ammeter on CT Voltmeter (direct) Voltmeter on PT

Electronic Analog W / VAR / PF / Hz Meters

CE





Rated Accuracy : ± 1.5% of F.S. for Watt & Var Meter (standard)
± 1.0% of F.S. for Watt & Var Meter(optional)
± 2° Phase Angle for Powerfactor Meter
± 1% of Full Scale for Frequency Meter

Test Voltage : 2.5KVAC for 1 min. @ 50 Hz, 4KV AC (optional)

Insulation Resistance : Over 20MOhm at 500V DC

Power Supply : Self-Powered

Casing : Size 72, 96, 144 ABS Case with Glass Front
Size 110 ABS Case with Clear Polycarbonate Cover

Continuous Over Load : 1.2 Times Rated Current / Voltage

Deflection			90°			240°			
Size in mm			72x72	96x96	144x144	72x72	96x96	110x110	144x144
Scale Length (mm)			60	90	140	110	155	175	230
System	Current Range (Amp)	Voltage Range (Volt)							
Watt Meters & Var Meters			Model Codes						
1 Phase 1 Element	1,5,10	63.5, 230	*72QW11 *72QV11	96QW11 96QV11	144QW11 144QV11	*72LW11 *72LV11	96LW11 96LV11	*110LW11 *110LV11	144LW11 144LV11
3 Phase 1 Element Balanced Load only	1,5,10	110, 440	*72QW31 *72QV31	96QW31 96QV31	144QW31 144QV31	*72LW31 *72LV31	96LW31 96LV31	*110LW31 *110LV31	144LW31 144LV31
3 Phase 2 Element [3 Wire] Balanced or Unbalanced Load	1, 5	110, 440	*72QW32 *72QV32	96QW32 96QV32	144QW32 144QV32	*72LW32 *72LV32	96LW32 96LV32	*110LW32 *110LV32	144LW32 144LV32
3 Phase 3 Element [4 Wire] Balanced or Unbalanced Load	1, 5	$110/\sqrt{3}$ $440/\sqrt{3}$	*72QW33 *72QV33	96QW33 96QV33	144QW33 144QV33	*72LW33 *72LV33	96LW33 96LV33	*110LW33 *110LV33	144LW33 144LV33
Powerfactor & Phase Angle Meter									
Single Phase	1, 5	63.5, 230	#72QF11	96QF11	144QF11	#72LF11	96LF11	110LF11	144LF11
3 Phase Balanced Load	1, 5	110, 440	#72QF31	96QF31	144QF31	#72LF31	96LF31	110LF31	144LF31
Frequency Meter									
40 - 60 Hz, 45 - 55 Hz, 45 - 65 Hz, 47 - 53 Hz, 55 - 65 Hz, 80 - 120 Hz, 360 - 440 Hz	NA	63.5, 110, 240, 440	F72	F96	F144	#FL72	FL96	FL110	FL144

Notes

* These Meters supplied with DIN Series Power Line Transducers.
# These Meters Supplied with External Box.
- Meters with Dual scale / Tripple scale stamping can be supplied.
- Rubber Gaskets for vibration protection available on request.
- Meters with centre zero or offset zero scale can be supplied.
- Other Voltage and Current ranges available subject to technical feasibility.

Ordering Information : Model, Input Voltage, Input Current, CTR / PTR, Scale, Accuracy Class

Rectangular AC & DC Panel Meter

CE

MR60, CR60

MR65, CR65

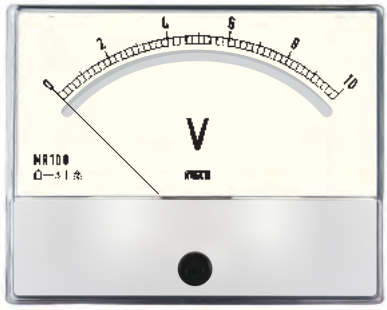

MR100, CR100

MR120, CR120

Model	**MR60, MR65, MR100, MR120**	**CR60, CR65, CR100, CR120**
Description	DC Ammeters and Voltmeters full scale deflection 90°	AC Ammeters and Voltmeters full scale deflection 90°
Movement Type	Moving coil, central magnetic core, spring mounted bearing jewel suspension	Moving coil, central magnetic core, spring mounted bearing jewel suspension with rectifier circuit.
Accuracy	± 1% of Full Scale for MR120 ± 1.5% of Full Scale for MR100 ± 2.5% of Full Scale for MR60, MR65	± 1.5% of Full Scale for CR100, CR120 ± 2.5% of Full Scale for CR60, CR65
Sensitivity	1000Ω / V (Voltmeter); 200Ω / V (Ammeter)	-
Operating Voltage	600 V RMS max.	600 V RMS max.
Test Voltage	2.5 KV for 1 minute at 50 Hz	2.5 KV for 1 minute at 50 Hz
Frequency	----	45Hz to 1KHz (Volt), 45-100Hz (Amp)
Construction & Design	According to IS 1248; EN 60051	According to IS 1248; EN 60051
Scale	According to DIN 43802	According to DIN 43802
Casing	ABS case with Clear Polycarbonate Cover	ABS case with Clear Polycarbonate Cover
Dimensions and Panel cutout	Refer Dimensions Page Overleaf	Refer Dimensions Page Overleaf

DC Ranges : MR Series

Ammeters*						Voltmeters		
µA	mA		A*	On Shunt		mV	V	
	1 mA	50 mA	1 A	—A/60 mV	50A/75 mV	50 mV	1 V	50 V
	1.5 mA	60 mA	1.5 A	—A/75 mV	60A/75 mV	60 mV	1.5 V	60 V
	2 mA	75 mA	2 A	—A/100 mV	75A/75 mV	75 mV	2 V	75 V
100 µA	2.5 mA	100 mA	2.5 A		100A/75 mV	100 mV	2.5 V	100 V
150 µA	4 mA	150 mA	4 A		150A/75 mV	150 mV	4 V	150 V
250 µA	5 mA	250 mA	5 A	5A/75 mV	250A/75 mV	250 mV	5 V	250 V
400 µA	6 mA	400 mA	6 A	6A/75 mV	400A/75 mV	400 mV	6 V	400 V
500 µA	10 mA	500 mA	10 A *	10A/75 mV	500A/75 mV	500 mV	10 V	500 V
600 µA	15 mA	600 mA	15 A	15A/75 mV	600A/75 mV	600 mV	15 V	600 V
	20 mA		20 A	20A/75 mV	and higher		20 V	
	25 mA		25 A	25A/75 mV			25 V	
	30 mA		30 A	30A/75 mV			30 V	
	40 mA		40 A	40A/75 mV			40 V	
			50 A					

* MR60 direct upto 10A DC only. Above 10A use with external shunt.

AC Ranges : CR Series

Ammeters @									Voltmeters				
1 x In (A)			2 x In (A)			6 x In (A)					On PT		
Direct	On CT		Direct	On CT		Direct	On CT		Direct		Ratio and Scale		
	(/-) (5A or 1A)			(/-) (5A or 1A)			(/-) (5A or 1A)				-V/63.5 V		
1 A	10/-	100/-	1/2 A	10/20/-	100/200/-	1/6 A	10/60/-	100/600/-	10 V	100 V	-V/110 V	2 KV	10 KV
5 A	15/-	150/-	5/10 A	15/30/-	150/300/-	5/30 A	15/90/-	150/900/-	15 V	150 V	-V/230 V	2.5 KV	15 KV
	20/-	250/-		20/40/-	250/500/-		20/120/-	250/1500/-	20 V	250 V	-V/250 V	3 KV	20 KV
	25/-	400/-		25/50/-	400/800/-		25/150/-	400/2400/-	25 V	400 V	-V/400 V	3.5 KV	25 KV
	30/-	500/-		30/60/-	500/1000/-		30/180/-	500/3000/-	30 V	500 V	-V/440 V	4 KV	30 KV
	40/-	600/-		40/80/-	600/1200/-		40/240/-	600/3600/-	40 V	600 V		5 KV	40 KV
	50/-	1000/-		50/100/-	1000/2000/-		50/300/-	1000/6000/-	50 V		1 KV	6 KV	50 KV
	60/-	1500/-		60/120/-	1500/3000/-		60/360/-	1500/9000/-	60 V		1.2 KV	7.5 KV	60 KV
	75/-	and higher		75/150/-	and higher		75/450/-	and higher	75 V		1.5 KV	8 KV	75 KV

@ From 100mA to 5A AC, use with External CT Box, supplied with the instrument.

Ordering Information: Model, Input range, Scale, CTR/PTR

Notes

a) Double stamping /non-standard / centre zero marking available.
b) Zero suppressed DC ammeter for 4-20mA and voltmeter for 1-5V available.
c) DC Voltmeters with sensitivity 10 K Ohms / V available.
d) Other ranges available subject to technical feasibility.

Moving Coil Educational Desk Stand Meters

MECO Educational Desk Stand Meters are ideal for laboratory use. These meters are made of an unbreakable ABS desk stand with two or three terminals and fitted with MR65, MR100, CR65 or CR100 meters.

MR65EDM

MR100EDM

CR65EDM

CR100EDM

Model	MR65EDM (DC)	MR100EDM (DC)
Accuracy	±2.5% of Full Scale	±1.5% of Full Scale
Scale Length	68mm	80mm

Ranges	MR65EDM / MR100EDM
Microamps	0-100μA to 0-1000μA
Milliamps	0-1mA to 0-1000mA
Amps	0-1A to 0-30A
Millivolts	0-50mV to 0-1000mV
Volt	0-1V to 0-1000V
Galvanometer	30-0-30 G or 50-0-50 G with 2 μA/Div or 20 μA/Div

Note : Dual ranges available subject to techincal feasibility.

Model	CR65EDM (AC)	CR100EDM (AC)
Accuracy	±2.5% of Full Scale	±1.5% of Full Scale
Scale Length	68mm	80mm

Ranges	CR65EDM / CR100EDM
Microamps	----
Milliamps	0-1mA to 0-1000mA
Amps	0-1A to 0-5A
Millivolts	----
Volt	0-10V to 0-1000V
Galvanometer	----

Dimension (mm)





Moving Coil Panel Meters

CE

DC : ME70, AC : CE70

Casing : Clear transparent Polycarbonate Cover
Accuracy : ±2.5% of Full Scale
Ranges & details : Similar to models MR60 and CR60, Current Range max. 1.5 A
Scale Length : 52mm

Dimensions (mm)

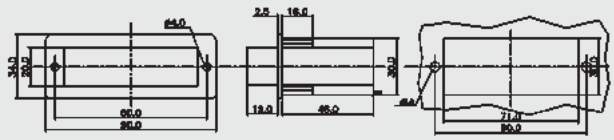

Panel Cut Out

Analog Panel & Switchboard Meters - Dimension

MODELS	SCALE LEHGTH (mm)	REFER DRAWING	A	B	C	D	E	F	EXT. BOX # DRAWING
SQ72 (VOLTMETER & AMMETER UPTO 20A)	64	1	72	51.5	67	68	17	19	-
SQ72 (AMMETER ABOVE 20A)	64	1	72	51.5	67	68	23	19	-
M72,F72,C72, (72QF11,31)	60	1	72	37	66	68	13	19.5	5
72QW11,31,32,33, (72QV11,31,32,33)	60	1	72	37	66	68	13	19.5	4
72LW11,31,32,33, (72LV11,31,32,33)	110	1	72	37	66	68	13	22	4
ML72,MLC72,72LF11,31,FL72	110	1	72	37	66	68	13	22	5
SQ96 (VOLTMETER & AMMETER UPTO 20A)	97	1	96	51.5	90	92	17	19	-
SQ96 (AMMETER ABOVE 20A)	97	1	96	51.5	90	92	23	19	-
M96 (Above 10A, E=18)	90	1	96	30	90	92	13	19.5	-
96QW11,31,32,33, (96QV11,31,32,33)	90	1	96	102	90	92	16	12	-
96LW11,31,32,33, (96LV11,31,32,33), 96LF11,31,FL96	155								
C96,96QF11,31,F96,M96 (4-20mA DC)	90	1	96	48	90	92	13	19.5	-
ML144,MLC144,144LF11,31,FL144	230	1	144	54	136	138	4	19	-
144QF11,31,F144	140	1	144	66	136	138	16	14	-
144QW11,31,32,33 (144QV11,31,32,33)	140	2	144	116	136	138	-	-	-
144LW11,31,32,33 (144LV11,31,32,33)	230	2	144	103	136	138	-	-	-
ML110,MLC110,110LF11,31,FL110	175	3	----As Per Drawing----						-
110LW,11,31,32,33, (110LV11,31,32,33)	175	3							4
ML96/MLC96 (Above 10A, E=18)	155	1	96	48	90	92	13	22	-

MODELS	SCALE LENGTH (mm)	REFER DRAWING	A	B	C	D	E	F	G	H	I	J	L	O	R	EXT. BOX # DRAWING
MR60,CR60	57	6	60	60	33	24	48	48	51.5	12	-	-	54	4BA	4.5	5 (CR60)
MR65,CR65	68	6	81	81	33	22	64	64	64	12	-	-	67	4BA	4.5	5 (CR65)
MR100,CR100	80	6	100	80	34	21	84	64	63	12	-	7	67	4BA	4.5	5 (CR100)
MR120,CR120	96	6	120	100	38	25	100	80	65	12	-	16	67	4BA	4.5	5 (CR120)

Dimensions (mm)

1

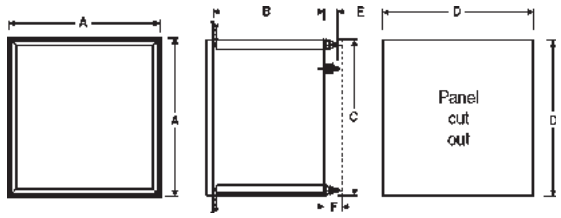

2

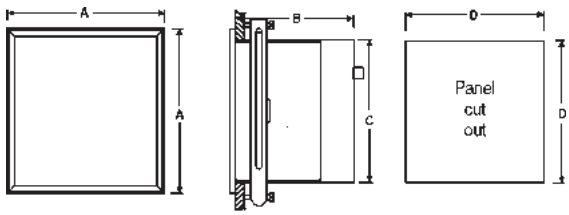

3

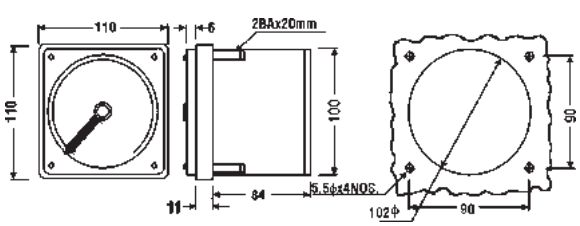

4 Dimension of DIN Series Power Line Transducers

Case Size	A	B	C	D	E	F	G	H
I	75	60	112	70	35	73	50	60
II	100	85	112	70	35	73	50	60
III	150	135	112	70	35	73	50	60

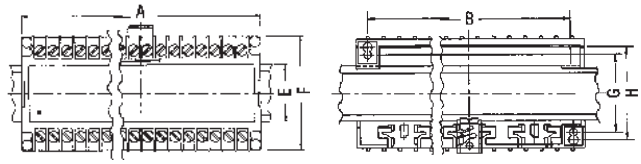

5

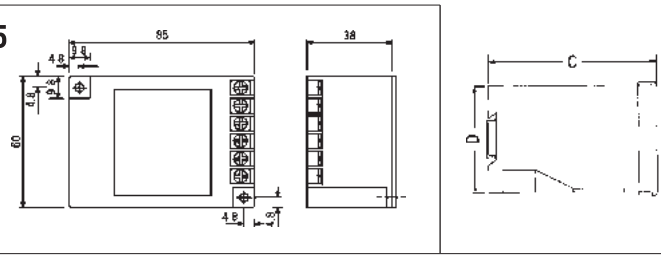

6

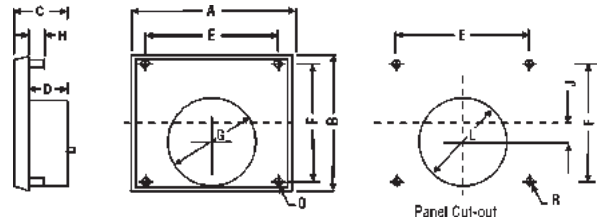

Note : # For ranges greater than 100 mA & upto 5A AC use Models CR60, CR65, CR100, CR120, C72 & MLC72 with External CT Box supplied with the instruments (Drawing 5).

MECO®

SINCE 1962

BEST MULTIMETERS AWARD

EFY'S BEST MULTIMETERS AWARD

Testing & Measuring Instruments
• Digital Multimeters

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

6½ Digit 12,00,000 Count Bench Top Digital Multimeter - TRMS

CE

USB

RS 232

65P

Features

- 6½ Digit Display (11,99,999 counts)
- 12 Different Measurement Capabilities : DCV / ACV, DCI / ACI, Ω2W / Ω4W, Frequency / Period, Diode Test, Continuty, dB/dBm
- High brightness vaccum fluorescent display
- True-rms AC vottage and current measurement, bandwidth up to 300kHz
- DCV measurment accuracy up to 0.0035%, resolution up to 0.1µV
- Max. measurernent rate : 1000 meas/sec
- Equal accuracy frequency measurement up to 1.1MHz
- TRMS
- Relative mode (REL) to eliminate residual reading
- 2 W, 4W resistance measurement mode selectable
- Built-in MX+B, %, dB/dBm etc mathematics calculation function
- 512 readings storage and MAX/MIN/AVER/STD statistics
- HI/IN/LO comparator function
- USB and RS-232 lnterfaces provide easy system communication
- Calibration without opening the case
- 10 sets of multimeter setup can be stored and loaded

The 6½ Digit Multimeter can test voltage / current / resistance fast and accurately. The concise design of front panel makes it easier to locate and select the measurement function. Adopts special input overload protect circuit which can stand 1500V voltage between input and ground. When over loaded, it can recover fast so as to ensure the safety and reliability of the equipment.

Many new technologies such as high speed low noise 26 bits A/D converter which gives the good linear and low noise performances. Fast response servo amplifier, floating power source and low offset buffer amplifier constitute front end of servo so as to remove the traditional attenuation, reduce offset drifting as well as to increase measurement rate. The SMD in the multimeter reduces the system density and volume.

Standard USB & RS-232 interface with protocol provided is used with for easy communication, data analysis and statistics as well as construction of an automatic measurement system. The system accepts SCPl (standard commands for programmable instrument) command sets. lt is compatible in communication software.

Test Function

Test Pararmeter	DCV, ACV, DCl, ACI, Ω2W, Ω4W, FREQUENCY, PERlOD, CONTINUITY •))), DIODE ⊣▶⊢
Mathematics Function	MX+B, %, dB/dBm, REL
Range	Auto, Manual
Display	Vaccum Fluorescent Display (VFD)
Trigger Mode	INT/MAN/BUS/EXT
Programmable Time Delay	0-6000mS
Reading Storage and Statistics	2 to 512 readings can be stored, loaded and counted / type of statistics : MAX/MIN/AVER/STD
Reading Hold	To find out best stable reading for each data block of the given reading number according to the given accuracy.
Limitation Measurement	To judge HI/IN/LO and display with ALARM for Hl/LO
Setup Storage	10 setup files can be stored and loaded
Communication Interface	Standard Commands for Programmable Instrument (SCPI) support for RS232 & USB interface

Measurement Condition

Calibration Interval : One Year
Operation Temperature : 18°C to 28°C
Accuracy is expressed as : ±(% of reading +% of range) after 30 min warm-up

Temperature coefficient : Add±[0.1% x (applicable accuracy)/°C] for 0°C to 18°C & 28°C to 40°C
Relative Humidity : Upto 80% for 0°C to 28°C (75% RH for 10MΩ & above ranges of resistance measurement). Upto 70% for 28°C to 40°C

Following is the specification at slow mode, others please refer the operation manual.

Full Scale Reading Digits and Reading Rate (meas/sec)				
Rate		**Slow**	**Med**	**Fast**
Full scale reading (digits)		119,999,9	119,999	11,999
Reading Rate (meas/sec) approximate	DC V, DC I	2	16	57
	AC V, AC I	1.5	4	25
	Ω2W Ranges below 100KΩ	2	16	57
	Ω4W Ranges below 100KΩ	1.5	10	33

Accessories	Pair of Test Leads x 1, Power Cord x 1, Fuse (500mA) x 2, Fuse (1A) x 2, USB Cable x 1, Operation Manual x 1, Test Report x 1, RS232 Cable x 1 (optional)

6½ Digit 12,00,000 Count Bench Top Digital Multimeter - TRMS

DC V		Max. Reading	Resolution	Accuracy	Input Impedance
	100mV	119.9999	0.1μV	0.0065 + 0.0045	>10GΩ
	1V	1.199999	1μV	0.0040 + 0.0009	>10GΩ
	10V	11.99999	10μV	0.0035 + 0.0005	>10GΩ
	100V	119.9999	100μV	0.0045 + 0.0006	10MΩ ±1%
	1000V	1010.000	1mV	0.0055 + 0.0015	10MΩ ±1%

DC I		Max. Reading	Resolution	Accuracy	Burden Voltage / Shunt Resister
	10mA	11.99999	10nA	0.05 + 0.004	<0.15V/10.1Ω
	100mA	119.9999	0.1μA	0.05 + 0.004	<1.5V/10.1Ω
	1A	1.199999	1μA	0.08 + 0.004	<0.3V/0.1Ω
	10A	11.99999	10μA	0.25 + 0.015	<0.15V/10mΩ

AC V		100mV	1V	10V	100V	750V
	Max. reading	119.9999	1.199999	11.99999	119.9999	757.500
	Resolution	0.1μV	1μV	10μV	100μV	1mV
	10Hz ~ 20Hz	1.50 + 0.20				
	20Hz ~ 40Hz	0.50 + 0.10				
	40Hz ~ 100Hz	0.10 + 0.03				
	100Hz ~ 20KHz	0.05 + 0.03			0.08 + 0.03	
	20KHz ~ 50KHz	0.15 + 0.05	0.11 + 0.05		0.18 + 0.05	---
	50KHz ~ 100KHz	0.60 + 0.08				---
	100KHz ~ 300KHz	4.00 + 0.50			---	---

AC I		10mA	1A	10A
	Max. reading	11.99999	1.199999	11.99999
	Resolution	10nA	1μA	10μA
	10Hz ~ 20Hz	1.50 + 0.10		1.60 + 0.10
	20Hz ~ 40Hz	0.50 + 0.03		0.60 + 0.30
	40Hz ~ 100Hz	0.10 + 0.03	0.12 + 0.03	0.15 + 0.03
	100Hz ~ 2KHz	0.05 + 0.03	0.10 +0.04	0.12 + 0.04
	2KHz ~ 5KHz	0.10 + 0.03	0.50 + 0.03	0.60 + 0.05
	5KHz ~ 10KHz	0.20 + 0.03	2.00 + 0.10	2.50 + 0.10
	Burden Voltage / Shunt Resistor	<0.15Vrms / 10.1Ω	<0.3Vrms / 0.1Ω	<0.15Vrms / 10mΩ

Frequency		Max. Reading	Resolution	Accuracy	Sensitivity (Sine Wave)
	5Hz~10Hz	9.999,999	1μHz	0.05	200mVrms
	10Hz~100Hz	99.999,99	10μHz	0.01	40mVrms
	100Hz~100KHz	99.999,99	10mHz	0.005	40mVrms
	100KHz~1MHz	999.999,9	0.1Hz	0.005	100mVrms

Ω2W / Ω4W		Max. Reading	Resolution	Measurement Current	Accuracy
	100Ω	119.9999	100μΩ	1mA	0.010+0.004
	1kΩ	1.199999	1mΩ	1mA	0.010+0.001
	10kΩ	11.99999	10mΩ	100μA	0.010+0.001
	100kΩ	119.9999	100mΩ	10μA	0.010+0.001
	1MΩ	1.199999	1Ω	10μA	0.010+0.001
	10MΩ	11.99999	10Ω	7.0xRx/(10M+Rx)	0.040+0.001
	100MΩ	119.9999	100Ω	7.0xRx/(10M+Rx)	0.800+0.010

General Specifications

- Operating Temperature & Humidity 0°C to 40°C, ≤ 90% RH
- Power Requirements Voltage 110V/220V AC ±15%
- Frequency 50Hz/60Hz ±5%
- Power Consumption ≤ 20VA
- Dimensions 265 x 105 x 360mm (approx.)
- Weight 2.863kg (approx.)

3¾ Digits 4000 Counts Digital Multimeter with PC Interface & Data Logging Software

81-USB

Features

- Auto / Manual
- 3¾ Digits 4000 Counts LCD
- Basic DC Accuracy : 0.3%
- More than 45 Measuring Ranges
- Frequency Measurement : 10Hz to 4 MHz
- Duty Cycle : 10% ~ 90%
- Resistance : 0.1Ω to 40MΩ
- Capacitance : 4nF to 40μF
- Measures AC Voltage in dBm or Volts
- Data HOLD / MAX / MIN
- Relative Measurement
- Pulse Widths
- Logic Test
- HFE Test
- Diode Test
- Audible Continuity
- Dynamic Recording
- Communication : USB Cable
- Auto Power Off

General Specification

- Power : One 9V Battery
- Weight : 296gms including Battery (approx.)
- Dimension : 178 x 88 x 43mm (approx.)
- Safety / Compliance : IEC 61010 CAT II
- Accessories : Instruction Manual, One Pair of Test Leads, Holster, Battery (installed), USB Cable & Software CD

Meter View Software

Display Graphs, Real Time Values, Analog Indication and Digital Values Simultaneously

Software has special features like :

- AUTO Amplitude Scale
- AUTO Sample Scale
- DATA Log
- Virtual LCD & Analog Meter

Electrical Specification

Range	Resolution	Accuracy	Note
DC Voltage			
400mV	100μV	± (0.3% rdg + 4 dgt)	Input Impedance : 10MΩ in parallel with < 50 PF Overload Protection 1000V DC / 750V AC
4V	1mV	± (0.5% rdg + 5 dgt)	
40V	10mV		
400V	100mV	± (0.5% rdg + 3 dgt)	
1000V	1V	± (0.5% rdg + 4 dgt)	
AC Voltage, AC Response : 50 ~ 500Hz			
400mV	100μV	± (0.5% rdg + 4 dgt)	Input Impedance : 10MΩ in parallel in parallel with < 50 PF Overload Protection 1000V DC / 750V AC
4V	1mV	± (0.5% rdg + 3 dgt)	
40V	10mV	± (0.8% rdg + 5 dgt)	
400V	100mV	± (0.6% rdg + 3 dgt)	
750V	1V	± (0.8% rdg + 4 dgt)	
DC Current			
400μA	100nA	± (0.8% rdg + 5 dgt)	Fuse : F 500mA / 250V
4mA	1μA	± (0.6% rdg + 3 dgt)	
40mA	10μA	± (1.2% rdg + 5 dgt)	
400mA	100μA		
4A	1mA	± (0.8% rdg + 5 dgt)	Fuse : F 12A / 250V
10A	10mA	± (1.0% rdg + 5 dgt)	
AC Current, AC Response : 50 ~ 500Hz			
400μA	100nA	± (1.0% rdg + 5 dgt)	Fuse : F 500mA / 250V
4mA	1μA		
40mA	10μA	± (1.5% rdg + 5 dgt)	
400mA	100μA		
4A	1mA	± (1.0% rdg + 5 dgt)	Fuse : F 12A / 250V
10A	10mA	± (1.2% rdg + 5 dgt)	
Resistance (Ω)			
400Ω	100mΩ	± (0.4% rdg + 5 dgt)	Overload Protection 250V DC / AC
4KΩ	1Ω	± (0.3% rdg + 3 dgt)	
40KΩ	10Ω		
400KΩ	100Ω		
4MΩ	1KΩ	± (0.6% rdg + 3 dgt)	
40MΩ	10KΩ	± (1.5% rdg + 5 dgt)	
Capacitance			
4nF	1 PF	± (3.0% rdg + 40 dgt)	Overload Protection 250V DC / AC
40nF	10 PF	± (3.0% rdg + 10 dgt)	
400nF	100 PF		
4μF	1 nF		
40μF	10 nF		
Frequency (Hz)			
400Hz	0.1 Hz	± (0.1% rdg + 4 dgt)	OL Protection : 250V DC / AC Sensitivity : 50mV rms (400Hz, 4KHz, 40KHz) 100mV rms (400Khz) 250mV rms (4MHz)
4KHz	1 Hz		
40KHz	10 Hz		
400KHz	100 Hz		
4 MHz	1 KHz		

Range	Accuracy	Note
Duty Cycle, for 10Hz to 100KHz		
10% ~ 90%	± (2 dgt / KHz + 2 dgt)	OL Protection : 250V DC / AC
Pulse Widths, for 10Hz to 100KHz		
1μs ~ 90 ms	± (5% rdg + 2 dgt)	OL Protection : 250V DC / AC
dBm, 20mV to 750V RMS at 50 / 60 Hz		
0 ~ +62dB	± (0.3% dBm + 2 dgt)	OL Protection : 1000V DC / 750V AC

Analog & Digital Display

Data Logging / Recording

3⅝ Digits 6000 Counts Autoranging Digital Multimeter - TRMS
3½ Digits 2000 Counts Manual Ranging Digital Multimeter

new

Preliminary Data

CE

801 JUNIOR

603 JUNIOR

TORCH LIGHT

HOLSTER WITH MAGNET

TEST LEAD GRIPPER

TRMS, Auto Ranging, 6000 Counts LCD with Backlight, Torchlight, APO, Capacitance, Frequency, Duty Cycle, NCV (LED, Buzzer & EF Strength), Temperature & Holster with Magnet

Ranges	
DC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V
Accuracy	± (0.8% rdg + 5 dgt)
AC Voltage TRMS	60 / 600mV / 6 / 60 / 600 / 750V
Accuracy	± (1.0% rdg + 10 dgt) on 60 / 600mV ± (1.0% rdg + 4 dgt) on all other ranges
AC Response	40Hz ~ 1KHz
DC Current	60 / 600mA / 6 / 10A
Accuracy	± (1.2% rdg + 4 dgt) on 60 / 600mA ± (3.0% rdg+ 2 dgt) on 6A ±(5.0% rdg +10 dgt) on 10A
AC Current TRMS	60 / 600mA / 6 / 10A
Accuracy	± (1.5% rdg + 3 dgt) on 60 / 600mA ± (3.0% rdg + 5 dgt) on 6A ±(5.0% rdg +10 dgt) on 10A
AC Response	40Hz ~ 1KHz
Resistance	600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ
Accuracy	± (0.8% rdg + 5 dgt)
Capacitance	60.00 / 600.0nF / 6.000 / 60.00 / 600.0μF / 6.000 / 60.00 / 100.0mF
Accuracy	± (3.0% rdg + 5 dgt) on all ranges except ± (5.0% rdg + 20 dgt) on 60.00 nF ± (5.0% rdg + 5 dgt) on 60.00 / 100.0 mF
Frequency	60.00 / 600.0Hz / 6.000 / 60.00 / 600.0KHz / 6.000 / 10.00MHz
Sensitivity	200mV to 10V AC
Accuracy	± (1.5% rdg + 5 dgt)

Manual Ranging, 2000 Counts LCD with Backlight, Torchlight, APO, NCV (LED, Buzzer & EF Strength), HFE & Holster with Magnet

Ranges	
DC Voltage	200mV / 2 / 20 / 200 / 1000V
Accuracy	± (0.5% rdg + 5 dgt)
AC Voltage	200 / 750V
Accuracy	± (1.2% rdg + 10 dgt)
AC Response	40Hz ~ 400Hz
DC Current	200mA / 10A
Accuracy	± (1.0% rdg + 5 dgt) on 200mA ± (3.0% rdg+ 2 dgt) on 10A
AC Current	200mA / 10A
Accuracy	± (3.0% rdg + 2 dgt)
AC Response	40Hz ~ 400Hz
Resistance	200Ω / 2 / 200KΩ / 2 / 20MΩ
Accuracy	± (1.0% rdg + 3 dgt)
Duty Cycle	1% ~ 99%
Accuracy	± (1.5% rdg + 5 dgt)
Temperature	-20°C ~ 1000°C / -4°F ~ 1832°F
Accuracy	± (1.0% rdg + 3 dgt)
Measuring Category	CAT II 600V
SP Function	Diode Test, Data Hold, Continuity Test / NCV Test (LED, Buzzer & EF Strength),
Power	Three 1.5V 'AAA' Battery
Low Battery	'▭' is indicated
Battery Life	200 hours typical
Dimensions	147 x 71 x 45mm (approx.)
Weight	230gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Spare Fuse (0.6A/250V) x 2, Holster, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)

Measuring Category	CAT II 600V
SP Function	Diode Test, Data Hold, Continuity Test / NCV Test (LED, Buzzer & EF Strength)
Power	Three 1.5V 'AAA' Battery
Low Battery	'▭' is indicated
Battery Life	200 hours typical
Dimensions	147 x 71 x 45mm (approx.)
Weight	230gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Spare Fuse (0.2A/250V) x 2, Holster, Battery (installed) & Instruction Manual

Accessories

K Type Bead Probe (upto 260 °C)
Model : TPK-B

K Type Stick Probe (upto 500°C)
Model : TP-02

Pair of Test Leads suitable for DMM/DTT
Model :
TL-DMM/DTT

Pair of Test Leads suitable for Insulation Tester
Model : TL-IT

3½ Digits 2000 Counts Manual Ranging Digital Multimeters
4½ Digits 20000 Counts Manual Ranging Digital Multimeter

63

603

45CF

3½ Digit 2000 Counts LCD Audiable Continuty, Data Hold Diode, hFE Test & Backlight Display	
Ranges	
DC Voltage	200mV/2/20/200/1000V
Accuracy	±(0.5%rdg+1dgt) on all ranges
AC Voltage	200/750V (50~500Hz)
Accuracy	±(1%rdg+4dgt) on 200V ±(1.5%rdg+4dgt) on 750V
DC Current	200µA/2mA/20mA/ 200mA/10A
Accuracy	±(1%rdg+1dgt) on all ranges except ±(2%rdg+3dgt) on 10A
Resistance	200Ω/2kΩ/20kΩ/200kΩ /2MΩ
Accuracy	±(0.8%rdg+1dgt) on all ranges, except ±(1%rdg+3dgt) on 200Ω
Sp. Function	Audible Continuity, Diode Test, hFE Test Data Hold & Backlight Display
Power	One 9V battery
Low Battery	" [+-] " is indicated
Battery Life	200 hours typical
Dimensions	145 x 70 x 35 mm (approx.)
Weight	180gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Holster

3½ Digit 2000 Counts, 17mm Large LCD, Audiable Continuty, Diode & hFE Test	
Ranges	
DC Voltage	200mV/2/20/200/1000V
Accuracy	±(0.5%rdg+1dgt) on all ranges
AC Voltage	200mV/2/20/200/750V (50~500Hz)
Accuracy	±(1%rdg+4dgt) on all ranges except ±(1.5%rdg+4dgt) on 750V
DC Current	200µA/2mA/20mA/ 200mA/20A
Accuracy	±(1%rdg+1dgt) on all ranges except ±(2%rdg+3dgt) on 20A
AC Current	200µA/2mA/20mA/ 200mA/20A (50~500Hz)
Accuracy	±(1.2%rdg+4dgt) on all ranges except ±(2%rdg+4dgt) on20A
Resistance	200Ω/2kΩ/20kΩ/200kΩ/ 2000kΩ/20MΩ/200MΩ
Accuracy	±(0.8%rdg+1dgt) on all ranges, except ±(1%rdg+3dgt) on 200Ω ±(3%rdg+3dgt) on 20MΩ ±(5%rdg+10dgt) on 200MΩ
Sp. Function	Audible Continuity, Diode Test, hFE Test
Power	One 9V battery
Low Battery	" [+-] " is indicated
Battery Life	200 hours typical
Dimensions	170 x 80 x 43mm (approx.)
Weight	240gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Carrying Case, Battery (installed), Instruction Manual and Spare Fuse

4½ Digit 20000 Counts, Large LCD, Capacitance, Frequency, hFE, Infrared Remote Control Check, Live Wire Check, APO	
Ranges	
DC Voltage	200mV/2/20/200/1000V
Accuracy	±(0.05%rdg+5dgt) on all ranges except ±(0.1%rdg+5dgt) on 1000V
AC Voltage	200mV/2/20/200/750V
Accuracy	±(0.8%rdg+10dgt) on all ranges except ±(1.0%rdg +15dgt) on 750V
DC Current	2mA/20/200mA/20A
Accuracy	±(0.5%rdg+5dgt) on 2/20mA ±(0.8%rdg+5dgt) on 200mA ±(2.0%rdg+10dgt) on 20A
AC Current	20/200mA/20A
Accuracy	±(0.8%rdg+10dgt) on 20/200mA ±(3%rdg+10dgt) on 20A
Resistance	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	±(0.4%rdg+5dgt) ±(0.8%rdg+5dgt) on 20MΩ
Capacitance	20/200nF/2/200µF
Accuracy	±(3%rdg+10dgt) ±(5%rdg+10dgt) on 200µF
Frequency	20kHz
Accuracy	±(1.5%rdg+5dgt)
Sp. Function	Diode, Continuity, Data Hold, hFE, Capacitance, Hz, Infrared Remote Control Check, Live Wire Check, APO
Power	One 9V battery
Low Battery	" [+-] " Indicated
Battery Life	150 hours typical
Dimensions	182 x 90 x 60 mm (approx.)
Weight	365gms Including Battery (app.)
Accessories	One Pair of Test Leads, Battery (installed), Inst.Manual & Holster

CE

9A09

9A06

801AUTO

3½ Digit, 2000 Counts LCD, Auto Ranging, Data Hold, Temperature & APO	
Ranges	
DC Voltage	200mV/2/20/200/600V
Accuracy	± (0.5%rdg + 4dgt) on 200mV & 2V, ± (0.7%rdg + 4dgt) on 20V & 200V, ± (1%rdg + 4dgt) on 600V
AC Voltage	2/20/200/600V
Accuracy	± (1.0%rdg + 8dgt) on all ranges except ± (1.5%rdg + 8dgt) on 600V
DC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (1.5%rdg + 4dgt)
AC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (2.2%rdg + 4dgt)
Resistance	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.7%rdg + 4dgt) on all ranges except ± (1.2%rdg + 4dgt) on 2MΩ ± (2.5%rdg + 4dgt) on 20MΩ
Temperature	-20°C~1300°C/-4°F~1999°F
Accuracy	± (2%rdg + 4dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AAA' Battery
Low Battery	"[-+]" Indicated
Battery Life	200 hours typical
Dimensions	150 x 80 x 33 mm (approx.)
Weight	140gms Including Battery (approx.)
Measuring Catagory	CAT II
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Holster **Optional :** K Type Thermocouple (upto 260°C)

Auto / Manual, 3½ Digit, 2000 Counts LCD, APO & Temperature	
Ranges	
DC Voltage	200mV/2/20/200/1000V
Accuracy	± (0.5%rdg + 4dgt) on 200mV & 2V, ± (0.7%rdg + 4dgt) on 20V & 200V, ± (1%rdg + 4dgt) on 1000V
AC Voltage	200mV/2/20/200/750V (200mV Manual only)
Accuracy	± (1.0%rdg + 8dgt) on all ranges except ± (1.5%rdg + 8dgt) on 750V
DC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (1.5%rdg + 4dgt)
AC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (2.2%rdg + 4dgt)
Resistance	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.7%rdg + 4dgt) on all ranges except ± (1.2%rdg + 4dgt) on 2MΩ ± (2.5%rdg + 4dgt) on 20MΩ
Temperature	-20°C~1300°C/-4°F~1999°F
Accuracy	± (2%rdg + 4dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	" [-+] " Indicated
Battery Life	200 hours typical
Dimensions	161 x 86 x 43 mm (approx.)
Weight	250gms Including Battery (approx.)
Measuring Catagory	CAT II
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case

Auto / Manual, 3¾ Digit, 4000 Counts LCD, APO, Capacitance, Frequency, Duty Cycle & Temperature	
Ranges	
DC Voltage	400mV/4/40/400/1000V
Accuracy	± (0.5% rdg + 4 dgt) on 400mV/4V ± (0.7% rdg + 4 dgt) on 40/400V ± (1.0% rdg + 4 dgt) on 1000V
AC Voltage	4/40/400/750V
Accuracy	± (1.0% rdg + 5 dgt) on all ranges except ± (1.5% rdg + 8 dgt) on 750V
DC Current	400/4000µA/40/400mA/4/20A
Accuracy	± (1.5% rdg + 4 dgt)
AC Current	400/4000µA/40/400mA/4/20A
Accuracy	± (2.2% rdg + 4 dgt)
Resistance	400Ω/4/40/400kΩ/4/40MΩ
Accuracy	± (0.7% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 4MΩ ± (2.5% rdg + 4 dgt) on 40MΩ
Capacitance	40/400nF/4/40/100µF
Accuracy	± (5.0% rdg + 10 dgt)
Frequency	9.999Hz ~9.999MHz
Accuracy	± (0.5% rdg + 2 dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (0.5% rdg + 2 dgt)
Temperature	-20°C~1300°C
Accuracy	± (2% rdg + 4 dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	" [▮] " is indicated
Battery Life	200 hours typical
Dimensions	161 x 86 x 43 mm (approx.)
Weight	250gms Including Battery (approx.)
Measuring Catagory	CAT II
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case

3¾ Digits 4000 Counts Autoranging Digital Multimeter (Pocket Size)
3⅝ Digits 6000 Counts Autoranging Digital Multimeter - TRMS (Pocket Size)

CE

101B+

108B+TRMS

Pocket Size

Auto Ranging, 3¾ Digits 4000 Counts LCD with Backlight, APO, Capacitance, REL Δ Frequency, Duty Cycle	
Ranges	
DC Voltage	400mV / 4 / 40 / 400 / 1000V
Accuracy	± (0.5% rdg + 4 dgt) on 400mV / 4 / 40 / 400V
	± (0.8% rdg + 4 dgt) on 1000V
AC Voltage	4 / 40 / 400 / 750V
Accuracy	± (1.2% rdg + 4 dgt) on all ranges except
	± (1.5% rdg+4 dgt) on 750V
AC Response	40Hz ~ 400Hz
DC Current	40 / 400mA / 4 / 10A
Accuracy	± (1.0% rdg + 4 dgt) on 40 / 400mA
	± (1.5% rdg + 4 dgt) on 4 / 10A
AC Current	40 / 400mA / 4 / 10A
Accuracy	± (2.0% rdg + 4 dgt)
AC Response	40Hz ~ 200Hz
Resistance	400Ω / 4 / 40 / 400KΩ / 4 / 40MΩ
Accuracy	± (0.8% rdg + 4 dgt) on all ranges except
	± (2.0% rdg + 4 dgt) on 40MΩ
Capacitance	4.000 / 40.00 / 400.0nF / 4.000 / 40.00 / 200.0µF
Accuracy	± (3.5% rdg + 4 dgt) on all ranges except
	± (2.5% rdg + 4 dgt) on 40.00nF
	± (5.0% rdg + 4 dgt) on 4.000nF
Frequency	99.99Hz ~ 10.00MHz
Sensitivity	1V to 36V AC
Accuracy	±(0.08% rdg + 2 dgt)

TRMS, Auto Ranging, 3⅝ Digits 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle, Temperature	
Ranges	
DC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V
Accuracy	± (1.0% rdg + 10 dgt) on 60 / 600mV
	± (0.5% rdg + 3 dgt) on 6 / 60 / 600 / 1000V
AC Voltage TRMS	60 / 600mV / 6 / 60 / 600 / 750V
Accuracy	± (1.0% rdg + 3 dgt) on all ranges except
	± (3.0% rdg + 3 dgt) on 60 / 600mV
AC Response	1Hz ~ 1KHz
DC Current	60 / 600mA / 6 / 10A
Accuracy	± (1.5% rdg+3 dgt)
AC Current TRMS	60 / 600mA / 6 / 10A
Accuracy	± (1.5% rdg + 3 dgt)
AC Response	1Hz ~ 1KHz
Resistance	600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ
Accuracy	± (0.5% rdg + 3 dgt) on 600Ω
	± (0.5% rdg + 2 dgt) on 6 / 60 / 600kΩ / 6MΩ
	± (1.5% rdg + 3 dgt) on 60MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9µF / 9.999mF
Accuracy	± (2.0% rdg + 5 dgt) on all ranges except
	± (5.0% rdg + 5 dgt) on 9.999mF
	± (5.0% rdg + 20 dgt) on 9.999nF
Frequency	99.99Hz ~ 10.00MHz
Accuracy	±(0.08% rdg + 2 dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (0.08% rdg + 2 dgt)
Temperature	-20°C ~ 1000°C / -4°F ~ 1832°F
Accuracy	±(1.0% rdg + 5 dgt) on <400°C / <752°F
	±(1.5% rdg + 15 dgt) on >400°C / >752°F
Measuring Category	CAT III 600V, CAT II 1000V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AAA' Battery
Low Battery	'▯' is indicated
Battery Life	200 hours typical
Dimensions	130 x 65 x 32mm (approx.)
Weight (approx.)	130gms Including Battery
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)

Duty Cycle	0.1% ~ 99.9%
Sensitivity	1V to 36V AC
Accuracy	± (0.08% rdg + 2 dgt)
Measuring Category	CAT III 600V, CAT II 1000V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AAA' Battery
Low Battery	'▯' is indicated
Battery Life	200 hours typical
Dimensions	130 x 65 x 32mm (approx.)
Weight (approx.)	130gms Including Battery
Accessories	One Pair of Test Leads, Battery (installed) & Instruction Manual

4 Digits 9999 Counts Auto & Manual Ranging Digital Multimeters - TRMS

CE

126B+TRMS

135B+TRMS

Pocket Size

TRMS, Auto / Manual, 4 Digits 9999 Counts LCD with Backlight, APO, Capacitance, Resistance, Frequency, Duty Cycle & Square Wave Output	
Ranges	
DC Voltage	9.999 / 99.99 / 999.9mV / 9.999 / 99.99 / 999.9V
Accuracy	± (0.5% rdg + 3 dgt)
AC Voltage TRMS	9.999 / 99.99 / 999.9mV / 9.999 / 99.99 / 750.0V
Accuracy	± (1.0% rdg + 3 dgt)
AC Response	40Hz ~ 1KHz
DC Current	99.99 / 999.9μA 999.9mA / 9.999A
Accuracy	± (0.8% rdg + 3 dgt) on 99.99 / 999.9μA ± (1.0% rdg + 3 dgt) on 999.9mA / 9.999A
AC Current TRMS	99.99 / 999.9μA 999.9mA / 9.999A
Accuracy	± (1.0% rdg + 3 dgt) on 99.99 / 999.9μA ± (1.2% rdg + 3 dgt) on 999.9mA / 9.999A
AC Response	40Hz ~ 1KHz
Resistance	99.99 / 999.9Ω / 9.999 / 99.99 / 999.9KΩ / 9.999MΩ
Accuracy	± (1.0% rdg + 3 dgt) on 99.99Ω ± (0.5% rdg + 3 dgt) on 999.9Ω / 9.999 / 99.99 / 999.9KΩ ± (1.5% rdg + 3 dgt) on 9.999MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	± (5.0% rdg + 20 dgt) on 9.999nF ± (2.0% rdg + 5 dgt) on 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF ± (5.0% rdg + 5 dgt) on 9.999mF
Frequency	99.99Hz ~ 9.999MHz

TRMS, Auto / Manual, 4 Digits 9999 Counts LCD with Backlight, APO, Capacitance, Resistance, NCV, Frequency, Duty Cycle & Temperature	
Ranges	
DC Voltage	9.999 / 99.99 / 999.9mV / 9.999 / 99.99 / 999.9V
Accuracy	± (0.5% rdg + 3 dgt)
AC Voltage TRMS	9.999 / 99.99 / 999.9mV / 9.999 / 99.99 / 750.0V
Accuracy	± (1.0% rdg + 3 dgt)
AC Response	40Hz ~ 1KHz
DC Current	99.99 / 999.9μA 999.9mA / 9.999A
Accuracy	± (0.8% rdg + 3 dgt) on 99.99 / 999.9μA ± (1.0% rdg + 3 dgt) on 999.9mA / 9.999A
AC Current TRMS	99.99 / 999.9μA 999.9mA / 9.999A
Accuracy	± (1.0% rdg + 3 dgt) on 99.99 / 999.9μA
Accuracy	±(0.1% rdg + 2 dgt)
Duty Cycle	1% ~ 99%
Accuracy	± (0.1% rdg + 2 dgt)
Square Wave Output	50Hz / 100Hz / 200Hz / 300Hz / 400Hz / 500Hz / 600Hz / 700Hz / 800Hz / 900Hz / 1000Hz / 2000Hz / 3000Hz / 4000Hz / 5000Hz
Measuring Category	CAT II 1000V, CAT III 600V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AAA' Battery
Low Battery	'▭' is indicated
Battery Life	200 hours typical
Dimensions	130 x 65 x 32mm (approx.)
Weight	130gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Drawstring Pouch, Battery (installed), Instruction Manual

	± (1.2% rdg + 3 dgt) on 999.9mA / 9.999A
AC Response	40Hz ~ 1KHz
Resistance	99.99 / 999.9Ω / 9.999 / 99.99 / 999.9KΩ / 9.999 / 99.99MΩ
Accuracy	± (1.0% rdg + 3 dgt) on 99.99Ω ± (0.5% rdg + 3 dgt) on 999.9Ω / 9.999 / 99.99 / 999.9KΩ ± (1.5% rdg + 3 dgt) on 9.999 / 99.99MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	± (5.0% rdg + 20 dgt) on 9.999nF ± (2.0% rdg + 5 dgt) on 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF ± (5.0% rdg + 5 dgt) on 9.999mF
Frequency	99.99Hz ~ 9.999MHz
Accuracy	±(0.1% rdg + 2 dgt)
Duty Cycle	1% ~ 99%
Accuracy	± (0.1% rdg + 2 dgt)
Temperature	-20°C ~ 1000°C / -4°F ~ 1832°F
Accuracy	± (2.5% rdg + 5 dgt)
Measuring Category	CAT II 1000V, CAT III 600V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AAA' Battery
Low Battery	'▭' is indicated
Battery Life	200 hours typical
Dimensions	130 x 65 x 32mm (approx.)
Weight	130gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Drawstring Pouch, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)

CE

153B+TRMS

171B+TRMS

TRMS, Auto Ranging, 3⅝ Digits 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Holster	
Ranges	
DC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V
Accuracy	± (1.0% rdg + 4 dgt) on 60 / 600mV ± (0.5% rdg + 2 dgt) on 6 / 60 / 600V ± (1.0% rdg + 3 dgt) on 1000V
AC Voltage TRMS	60 / 600mV / 6 / 60 / 600 / 750V
Accuracy	± (1.0% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 60 / 600mV ± (1.5% rdg + 5 dgt) on 750V
AC Response	40Hz ~ 1KHz
DC Current	600 / 6000μA / 60 / 600mA / 6 / 20A
Accuracy	± (1.0% rdg + 2 dgt) on 600 / 6000μA ± (1.2% rdg + 3 dgt) on 60 / 600mA ± (1.5% rdg+ 5 dgt) on 6 / 20A
AC Current TRMS	600 / 6000μA / 60 / 600mA / 6 / 20A
Accuracy	± (1.5% rdg + 5 dgt) on 600 / 6000μA ± (2.0% rdg + 5 dgt) on 60 / 600mA ± (2.5% rdg + 5 dgt) on 6/20A
AC Response	40Hz ~ 1KHz
Resistance	600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ
Accuracy	± (1.2% rdg + 2 dgt) on 600Ω & 6MΩ ± (1.0% rdg + 2 dgt) on 6 / 60 / 600kΩ ± (1.5% rdg + 2 dgt) on 60MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	± (2.0% rdg + 4 dgt) on all ranges except ± (3.0% rdg + 4 dgt) 9.999mF

TRMS, Auto / Manual, 3⅝ Digits 6000 Counts LCD with Backlight, APO, Capacitance, REL Δ, Max / Min, Frequency, Duty Cycle, Temperature & Holster	
Ranges	
DC Voltage	60 / 600mV / 6 / 60 / 600 / 1000V
Accuracy	± (1.0% rdg + 4 dgt) on 60 / 600mV ± (0.5% rdg + 2 dgt) on 6 / 60 / 600V ± (1.0% rdg + 3 dgt) on 1000V
AC Voltage TRMS	60 / 600mV / 6 / 60 / 600 / 750V
Accuracy	± (1.0% rdg + 5 dgt) on all ranges except ± (1.2% rdg + 5 dgt) on 60 / 600mV ± (1.5% rdg + 5 dgt) on 750V
AC Response	40Hz ~ 1KHz
DC Current	600 / 6000μA / 60 / 600mA / 6 / 20A
Accuracy	± (1.0% rdg + 2 dgt) on 600 / 6000μA ± (1.2% rdg + 3 dgt) on 60 / 600mA ± (1.5% rdg+ 5 dgt) on 6 / 20A
AC Current TRMS	600 / 6000μA / 60 / 600mA / 6 / 20A
Frequency	99.99Hz ~ 10.00MHz
Sensitivity	1V ~ 36V AC
Accuracy	±(0.05% rdg + 4 dgt)
Duty Cycle	0.1% ~ 99.9%
Sensitivity	1V ~ 36V AC
Accuracy	± (0.05% rdg + 4 dgt)
Measuring Category	CAT III 1000V, CAT IV 600V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	'▯' is indicated
Battery Life	200 hours typical
Dimensions	180 x 90 x 52mm (approx.)
Weight	370gms Including Battery (app.)
Accessories	One Pair of Test Leads, Holster, Battery (installed) & Instruction Manual

Accuracy	± (1.5% rdg + 5 dgt) on 600 / 6000μA ± (2.0% rdg + 5 dgt) on 60 / 600mA ± (2.5% rdg + 5 dgt) on 6 / 20A
AC Response	40Hz ~ 1KHz
Resistance	600Ω / 6 / 60 / 600KΩ / 6 / 60MΩ
Accuracy	± (1.2% rdg + 2 dgt) on 600Ω & 6MΩ ± (1.0% rdg + 2 dgt) on 6 / 60 / 600kΩ ± (1.5% rdg + 2 dgt) on 60MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	± (2.0% rdg + 4 dgt) on all ranges except ± (3.0% rdg + 4 dgt) on 9.999mF
Frequency	99.99Hz ~ 10.00MHz
Accuracy	±(0.05% rdg + 4 dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (0.05% rdg + 4 dgt)
Temperature	-40°C ~ 1000°C / -40°F ~ 1832°F
Accuracy	± (3.0% rdg + 4 dgt) on -40°C ~ 0°C / -40°F ~32°F ± (1.0% rdg + 3 dgt) on 0°C ~ 400°C / 32°F ~ 750°F ± (2.0% rdg + 5dgt) on 400°C ~ 1000°C / 750°F ~ 1832°F
Measuring Category	CAT III 1000V, CAT IV 600V
SP Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	'▯' is indicated
Battery Life	200 hours typical
Dimensions	180 x 90 x 52mm (approx.)
Weight	370gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Holster, Battery (installed), Instruction Manual & K Type Thermocouple (upto 260°C)

3⅝ Digits 6600 Counts Autoranging Digital Multimeter - TRMS
4½ Digits 20000 Counts Autoranging Digital Multimeter - TRMS

CE

666TRMS

450B+TRMS

TRMS, Auto / Manual, 3⅝ Digits 6600 Counts, APO, Capacitance, Frequency, Duty Cycle, Temp., Diode, Audible Continuity & Data Hold

Ranges	
DC Voltage	600mV / 6 / 60 / 600 / 1000V
Accuracy	±(1.0%rdg+4dgt) on 600mV ±(0.5%rdg+2dgt) on 6 / 60 / 600V ±(1.0%rdg+3dgt) on 1000V
AC Voltage TRMS	600mV / 6 / 60 / 600 / 750V
Accuracy	±(1.0%rdg+5dgt) on all ranges except ±(1.2%rdg+5dgt) on 600mV ±(1.5%rdg+5dgt) on 750V
AC Response	40Hz~1KHz
DC Current	600 / 6000μA / 60 / 600mA / 6 / 20A
Accuracy	±(1.0%rdg+2dgt) on 600 / 6000μA ±(1.2%rdg+3dgt) on 60 / 600mA ±(1.5%rdg+5dgt) on 6/20A
AC Current TRMS	600 / 6000μA / 60 / 600mA / 6 / 20A
Accuracy	±(1.5%rdg+5dgt) on 600 / 6000μA ±(2.0%rdg+5dgt) on 60 / 600mA ±(2.5%rdg+5dgt) on 6 / 20A
AC Response	40Hz~1KHz
Resistance	600Ω / 6 / 60 / 600kΩ / 6 / 60MΩ
Accuracy	±(1.2%rdg+2dgt) on 600Ω & 6MΩ ±(1.0%rdg+2dgt) on 6 / 60 / 600kΩ ±(1.5%rdg+2dgt) on 60MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF / 9.999mF
Accuracy	±(2.0%rdg + 4dgt) on all ranges except ±(3.0%rdg + 4dgt) on 9.999mF
Frequency	99.99Hz ~10.00MHz
Accuracy	±(0.05%rdg + 4dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	±(0.05%rdg + 4dgt)
Temperature	-40°C~1000°C / -40°F~1832°F
Accuracy	±(3.0%rdg + 4dgt) on - 40°C~0°C / -40°F~32°F ±(1.0%rdg + 3dgt) on 0°C ~400°C / 32°F~750°F ±(2.0%rdg + 5dgt) on 400°C~1000°C / 750°F~1832°F
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	"[±]" indicated
Battery Life	200 hours typical
Dimensions	161 x 86 x 43 mm (approx.)
Weight	250gms Including Battery (approx.)
Measuring Catagory	CAT II
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Instruction Manual & Carrying Case

TRMS, Auto / Manual, 4½ Digit 19999 Count LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle, DATA HOLD, MIN / MAX, Δ ZERO / REL, Diode Test, Audible Continuity & NCV

Ranges	
DC Voltage	19.999 / 199.99mV / 1.9999 / 19.999 / 199.99 / 1000.0V
Accuracy	±(0.5% rdg + 3 dgt)
AC Voltage TRMS	19.999 / 199.99mV / 1.9999 / 19.999 / 199.99 / 750.0V
Accuracy	± (1.0% rdg + 3 dgt)
AC Response	40Hz ~ 1KHz
DC Current	199.99 / 1999.9μA / 19.999 / 199.99mA / 1.9999 / 10.000A
Accuracny	± (0.8% rdg + 3 dgt) on 199.99 / 1999.9μA ± (1.0% rdg + 3 dgt) on all other ranges
AC Current TRMS	199.99 / 1999.9μA / 19.999 / 199.99mA / 1.9999 / 10.000A
Accuracy	± (1.0% rdg + 3 dgt) on 199.99 / 1999.9μA ± (1.2% rdg + 3 dgt) on all other ranges
AC Response	40Hz ~ 1KHz
Resistance	199.99Ω / 1.9999 / 19.999 / 199.99kΩ / 1.9999 / 19.999 / 199.99MΩ
Accuracy	± (1.0% rdg + 3 dgt) on 199.99Ω ± (0.5% rdg + 3 dgt) on 1.9999 / 19.999 / 199.99kΩ ± (1.5% rdg + 3 dgt) on 1.9999 / 19.999MΩ ± (3% rdg + 5 dgt) on 199.99MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF/ 9.999mF
Accuracy	± (5.0% rdg + 20 dgt) on 9.999nF ± (2.0% rdg + 5 dgt) on 99.99 / 999.9nF / 9.999 / 99.99 / 999.9μF ± (5.0% rdg + 5 dgt) on 9.999mF
Frequency	99.99 / 999.9Hz / 9.999 / 99.99 / 999.9KHz / 9.999MHz
Accuracy	± (0.1% rdg + 2 dgt)
Duty Cycle	1% ~ 99%
Accuracy	± (0.1% rdg + 2 dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	'[▮]' is indicated
Battery Life	200 hours typical
Dimensions	161 x 81 x 39 mm (approx.)
Weight	230gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Drawstring Pouch

3¾ Digits 4000 Counts Digital Multimeter upto 2KV DC/AC
3½ Digits 2000 Counts Digital Multimeter with Automatic Terminal Blocking

new

Preliminary Data

CE

2007S

6255

Automatic Terminal Blocking

When Ohm Measurment Selected

When mA Measurment Selected

When 20A Measurment Selected

3¾ Digit, 4000 Count, Large LCD, APO, Capacitance, Frequency, hFE, Temperature, Backlight, NCV (LED, Buzzer & EF Strength), Holster

Ranges	
DC Voltage	400mV/4/40/400/**2000V (10 Seconds)**
Accuracy	±(1.2%rdg + 3dgt) on 400mV ±(0.5%rdg + 3dgt) on 4/40/400V ±(2.0%rdg + 5dgt) on 2000V
AC Voltage	4/40/400/**2000V (10 Seconds)**
Accuracy	±(1.2%rdg + 3dgt) on all ranges except ±(2.5%rdg + 10dgt) on 2000V
AC Response	40Hz~400Hz
DC Current	4/40/400mA
Accuracy	±(1.0%rdg + 3dgt)
AC Current	4/40/400mA
Accuracy	±(2.0%rdg + 5dgt)
AC Response	40Hz~400Hz
Resistance	400Ω/4/40/400KΩ/4/40/400MΩ
Accuracy	±(1.0%rdg + 5dgt) on all ranges except ±(1.2%rdg + 8dgt) on 40MΩ ±(4.0%rdg + 10dgt) on 400MΩ
Capacitance	40/400nF/4/40/400μF
Accuracy	±(4.0%rdg + 5dgt) on all ranges except ±(4.5%rdg + 5dgt) on 400μF
Frequency	4KHz/40KHz/400KHz/4MHz
Accuracy	±(1.5%rdg + 8dgt) on all ranges except ±(1.5%rdg + 40dgt) on 4MHz
Temperature	-40°C~1000°C
Accuracy	±(1.0%rdg + 8dgt) on -40°C~400°C ±(1.5%rdg + 15dgt) on -401°C~1000°C
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	One 9V Battery
Low Battery	"⊟" is indicated
Battery Life	200Hours typical
Overvolt Protection (10 Seconds)	380V DC or AC RMS overload protection in Resistance, Capacitance, Diode, Continuity, Frequency, Temperature
Dimension	182 x 78 x 40mm (approx.)
Weight	310gms Including Battery (approx.)
Measuring Category	CAT II 400V, CAT III 400V
Accessories	One Pair of Test Lead, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual, Carrying Case & Spare Fuse

3½ Digit, 2000 Counts LCD, Backlight, Data Hold, Temperature, hFE, RPM, Ignition Frequency, MS Pulse Width, Automatic Terminal Blocking Mechanism, Holster & APO

Ranges	
DC Voltage	20/200/1000V
Accuracy	± (0.5%rdg + 3dgt) on 20V & 200V ± (0.8%rdg + 3dgt) on 1000V
AC Voltage	20/200/700V
Accuracy	± (1.0%rdg + 5dgt) on 20V & 200V ± (1.2%rdg + 5dgt) on 700V
DC Current	20/200mA/20A
Accuracy	± (1.5%rdg + 5dgt) on 20mA & 200mA ± (2.0%rdg + 10dgt) on 20A
AC Current	20/200mA/20A
Accuracy	± (2.0%rdg + 5dgt) on 20mA & 200mA ± (3.0%rdg + 10dgt) on 20A
Resistance	200Ω/2/20/200KΩ/2MΩ
Accuracy	± (1.0%rdg + 1dgt) on all ranges except ± (1.0%rdg + 5dgt) on 200Ω
Frequency	2KHz, 20KHz
Accuracy	± (1.5%rdg + 10dgt)
Duty Cycle	1% ~ 99% (only for referance)
Pulse Width	0.1mS~999.9mS
Accuracy	± (1.5%rdg + 10dgt)
Dwell Angle	
Cylinder No.	
1 CYL	0~356.4°
2 CYL	0~178.2°
3 CYL	0~118.8°
4 CYL	0~89.1°
5 CYL	0~71.3°
6 CYL	0~59.4°
8 CYL	0~44.5°
Accuracy	± (3.0%rdg + 5dgt)
Rotational Speed (RPM)	
Cylinder No.	
2 STR	300~19999 RPM
4 STR	600~19999 RPM
Accuracy	± (3.0%rdg + 5dgt)
Temperature	-40°C~1000°C
Accuracy	± (5.0%rdg + 5dgt) on -40°C~0°C ± (1.0%rdg + 3dgt) on 0°C~400°C ± (2.0%rdg + 3dgt) on 400°C~1000°C
Sp. Function	Diode Test, Audible Continuity
Power	One 9V Battery
Low Battery	"⊟" Indicated
Battery Life	200 hours typical
Dimensions	200 x 85 x 38 mm (approx.)
Weight	800gms Including Battery (approx.)
Measuring Catagory	CAT III 300V, CAT II 600V
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C) & Inst. Manual

MECO®

SINCE 1962

BEST DIGITAL CLAMP METER AWARD

Testing & Measuring Instruments
• Digital Clampmeters / Tong Testers

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Autoranging Digital Clampmeters - 600A AC TRMS / 1000A AC

new

27-AUTO BL

27T-AUTO BL

2502T-AUTO

600A AC TRMS Auto Ranging, 3½ Digit, 2000 Counts, Data Hold, Max, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO	
Ranges	
AC Current TRMS	2A, 20A, 200A, 600A (Auto Ranging)
Accuracy	±(3%rdg+5dgt) on 2A ±(2%rdg+3dgt) on 20A ±(2%rdg+5dgt) on 200A & 600A
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
AC Voltage TRMS	2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
DC Voltage	200mV, 2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
Resistance	200Ω, 2kΩ, 20KΩ, 200kΩ, 2MΩ, 20MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" [+-] " is indicated
Dimension	185 x 65 x 28 mm (approx.)
Weight	170 gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)
Jaw Opening	Cable Dia. 25mm (max.)
Safety Standard	CAT II 600V

600A AC TRMS Auto Ranging, 3½ Digit, 2000 Counts, Temperature, Data Hold, Max, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO	
Ranges	
AC Current TRMS	2A, 20A, 200A, 600A (Auto Ranging)
Accuracy	±(3%rdg+5dgt) on 2A ±(2%rdg+3dgt) on 20A ±(2%rdg+5dgt) on 200A & 600A
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
AC Voltage TRMS	2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
DC Voltage	200mV, 2V, 20V, 200V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Resistance	200Ω, 2kΩ, 20KΩ, 200kΩ, 2MΩ, 20MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" [+-] " is indicated
Dimension	185 x 65 x 28 mm (approx.)
Weight	170 gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed) K Type Thermocouple (upto 260°C)
Jaw Opening	Cable Dia .25mm (max.)
Safety Standard	CAT II 600V

1000A AC Auto / Manual, 3½ Digit, 2000 Counts, Temperature, Data Hold, Max, NCV (LED & Buzzer), APO	
Ranges	
AC Current	2A, 20A, 200A, 1000A
Accuracy	±(3%rdg+5dgt) on 2A & 20A ±(2%rdg+5dgt) on 200A & 1000A
Overload	1000A AC max. for 1 min.
AC Voltage	2V, 20V, 200V, 750V
Accuracy	±(1.2%rdg+3dgt)
DC Voltage	200mV, 2V, 20V, 200V, 1000V
Accuracy	±(0.8%rdg+3dgt)
Temperature	-20°C to 750°C
Accuracy	±(3%rdg+5dgt)
Resistance	200Ω, 2kΩ, 20KΩ, 200kΩ, 2MΩ, 20MΩ
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	30Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AA' Battery
Battery Life	200 Hours Typical
Low Battery	" [+-] " is indicated
Dimension	245 x 95 x 35 mm (approx.)
Weight	309 gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed) K Type Thermocouple (upto 260°C)
Jaw Opening	Cable Dia. 52mm (max.)
Safety Standard	CAT III 600V

Autoranging Digital Clampmeters - 600A AC TRMS / 1000A AC

new

72-AUTO BL

72T-AUTO BL

2520THz-AUTO

600A AC TRMS
Auto Ranging, 3¾ Digit, 4000 Counts, Data Hold, Rel.Test, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges	
AC Current TRMS	40A, 400A, 600A (Auto Ranging)
Accuracy	±(2.5%rdg+5dgt)
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
AC Voltage TRMS	4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
DC Voltage	400mV, 4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
	4Hz ~ 1MHz (Auto Ranging)
Frequency	
Accuracy	±(0.5%rdg+2dgt)
Resistance	400Ω, 4kΩ, 40KΩ, 400kΩ, 4MΩ, 40MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" ⊞ " is indicated
Dimension	185 x 65 x 28 mm (approx.)
Weight	170gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)
Jaw Opening	Cable Dia. 25mm (max.)
Safety Standard	CAT II 600V

600A AC TRMS
Auto Ranging, 3¾ Digit, 4000 Counts, Temperature, Capcitance, Data Hold, Rel.Test, Backlight, Torchlight, NCV (LED, Buzzer & EF Strength), APO

Ranges	
AC Current TRMS	40A, 400A, 600A (Auto Ranging)
Accuracy	±(2.5%rdg+5dgt)
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
AC Voltage TRMS	4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
DC Voltage	400mV, 4V, 40V, 400V, 600V (Auto Ranging)
Accuracy	±(0.8%rdg+3dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Capacitance	5nF, 50nF, 500nF, 5μF, 50μF, 200μF
Accuracy	±(3%rdg+2dgt)
Frequency	4Hz ~ 1MHz (Auto Ranging)
Accuracy	±(0.5%rdg+2dgt)
Resistance	400Ω, 4kΩ, 40KΩ, 400kΩ, 4MΩ, 40MΩ (Auto Ranging)
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	40Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" ⊞ " is indicated
Dimension	185 x 65 x 28 mm (approx.)
Weight	170gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed) K Type Thermocouple (upto 260°C)
Jaw Opening	Cable Dia. 25mm (max.)
Safety Standard	CAT II 600V

1000A AC
Auto / Manual, 3¾ Digit, 4000 Counts, Temperature, Capcitance, Data Hold, Hz / Duty, NCV (LED & Buzzer), APO

Ranges	
AC Current	40A, 400A, 1000A
Accuracy	±(2.5%rdg+5dgt)
Overload	1000A AC max. for 1 min.
AC Voltage	4V, 40V, 400V, 750V
Accuracy	±(1.2%rdg+3dgt)
DC Voltage	400mV, 4V, 40V, 400V, 1000V
Accuracy	±(0.8%rdg+3dgt)
Temperature	-20°C to 750°C
Accuracy	±(3%rdg+5dgt)
Capacitance	5nF, 50nF, 500nF, 5μF, 50μF, 200μF (Auto Ranging)
Accuracy	±(3%rdg+7dgt) >5μF±(5%rdg+5dgt) >100μF Not Applicable
Frequency	10Hz ~ 10MHz (Auto Ranging)
Accuracy	±(0.5%rdg+2dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	±(0.5%rdg+2dgt)
Resistance	400Ω, 4kΩ, 40KΩ, 400kΩ, 4MΩ, 40MΩ
Accuracy	±(1.2%rdg+3dgt)
Audible Continuity	30Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AA' Battery
Battery Life	200 Hours Typical
Low Battery	" ⊞ " is indicated
Dimension	245 x 95 x 35 mm (approx.)
Weight	309gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed) K Type Thermocouple (upto 260°C)
Jaw Opening	Cable Dia. 52mm (max.)
Safety Standard	CAT III 600V

Smart Digital Clampmeter - 400A AC
Auto / Manual Ranging Digital Clampmeters - 600A AC TRMS / 1000A AC

new

18 SMART

2727

3150+

400A AC

Auto Ranging, 3½ Digit, 2000 Counts, Data Hold for Resistance & Continuity

Ranges	
AC Current	2A, 20A, 200A, 400A (Auto Ranging)
Accuracy	±(2.5%rdg+10dgt) on 2A & 20A ±(2.0%rdg+5dgt) on 200A & 400A (Measures above 700mA AC)
AC Response	40 ~ 200Hz
Overload	400A AC max. for 1 min.
AC Voltage	2V, 20V, 200V, 600V (Auto)
Accuracy	±(1.2%rdg+3dgt) on all ranges except ±(1.2%rdg+8dgt) on 600V (Measures above 1V AC)
AC Response	40 ~ 400Hz
DC Voltage	2V, 20V, 200V, 600V (Auto)
Accuracy	±(0.5%rdg+2dgt) on all ranges except ±(1.0%rdg+5dgt) on 600V (Measures above 1V DC)
Resistance	200Ω, 2kΩ, 20KΩ, 200kΩ, 2MΩ, 20MΩ (Auto)
Accuracy	±(1.5%rdg+3dgt)
Audible Continuity	30Ω Approx
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" [+-] " is indicated
Dimension	175 x 65 x 28 mm (approx.)
Weight	130gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (Installed)
Jaw Opening	Cable Dia. 25mm (max.)
Measuring Catagory	CAT III 600V

600A AC TRMS

Manual Ranging, 3¾ Digit, 4000 Counts, Frequency, Data Hold, Temperature

Ranges	
AC Current TRMS	40A, 400A, 600A
Accuracy	± 1.5%rdg + 4dgt) on all ranges (50~60Hz) ± (3.5%rdg + 5dgt) on all ranges (40~500 Hz)
Overload	600A AC max. for 1 min.
ACVoltage TRMS	400V, 750V (50~500 Hz)
Accuracy	± (2.9%rdg + 4dgt) on all ranges
DCVoltage	1000V
Accuracy	± (1.5%rdg + 1dgt)
Resistance	400Ω, 400KΩ
Accuracy	± (1.5%rdg + 3dgt) on all ranges
Frequency	4KHz, 40KHz (autoranging)
Accuracy	± (0.5%rdg + 3dgt) (for non distorted waveforms only)
Temp.	-20°C to 750°C
Accuracy	± (2%rdg + 3dgt) on -20°C to 500°C, ± (3%rdg + 2dgt) on 500°C to 750°C
Sp. Function	Audible Continuity, Diode Test Function
Power	One 9V Battery
Battery Life	200 hours typical
Low Battery	" [+-] " is indicated
Dimension	192 x 82 x 33 mm (approx.)
Weight	270gms Including Battery (approx.)
Jaw Opening	Cable Dia. 30mm (max.)
Accessories	One Pair of Test Leads, Carrying Case, K Type Thermocouple (upto 260°C) Battery (installed) & Instruction Manual

1000A AC

Manual Ranging, 3½ Digit, 2000 Counts, Data Hold, APO

Ranges	
AC Current	200A, 1000A (40Hz~500Hz)
Accuracy	±(3%rdg+4dgt) on 200A ±(2%rdg+4dgt) on 1000A
Overload	1000A AC max. for 1 min.
AC Voltage	200V, 1000V (40~500Hz)
Accuracy	±(1.0%rdg+8dgt) on 200V ±(1.5%rdg+8dgt) on 1000V
DC Voltage	200V, 1000V
Accuracy	±(0.8%rdg+4dgt) on 200V ±(1%rdg+4dgt) on 1000V
Resistance	200kΩ, 20MΩ
Accuracy	±(1.2%rdg+4dgt) on 200KΩ ±(2.5%rdg+4dgt) on 20MΩ
Over Volt Protection	600V DC or AC RMS
Audible Cont.	40Ω (approx.)
Over Volt Protection	600V DC or AC RMS
Diode Test	1.0 ± 0.6mA (approx.)
Over Volt Protection	600V DC or AC RMS
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	" [+-] " is indicated
Dimension	247 x 90 x 40 mm (approx.)
Weight	380gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, 1.5V Battery (installed)
Jaw Opening	Cable Dia. 43mm (max.) Bus Bar 16mm x 65mm

Auto / Manual Ranging Digital Clampmeters - 1000A AC TRMS

new

Preliminary Data

2250-Hz AUTO

1008-TRMS

1000A AC TRMS
Auto Ranging, 3¾ Digit, 4200 Counts, Data Hold, Frequency, Duty Cycle, APO

Ranges	
AC Current TRMS	4A, 40A, 400A, 1000A
Accuracy	±(3%rdg+4dgt) on 40A ±(2%rdg+4dgt) on 400A, 1000A
AC Response	40Hz ~ 1KHz
Overload	1000A AC max. for 1 min.
AC Voltage TRMS	4V, 40V, 400V, 750V (Auto) (40-500Hz)
Accuracy	±(1.0%rdg+8dgt) on all ranges except ±(1.5%rdg+8dgt) on 750V
AC Response	40Hz ~ 1KHz
DC Voltage	4V, 40V, 400V, 1000V (Auto)
Accuracy	±(0.5%rdg+4dgt) on 4V ±(0.7%rdg+4dgt) on 40V & 400V ±(1 %rdg+4dgt) on 1000V
Resistance	400Ω, 4kΩ, 40KΩ 400kΩ, 4MΩ, 40MΩ (Auto)
Accuracy	±(0.7%rdg+4dgt) on all ranges except ±(1.2%rdg+4dgt) on 4MΩ ±(2.5%rdg+4dgt) on 40MΩ
Over Volt Protection	600V DC or AC RMS
Frequency Ranges	9.999Hz, 99.99Hz, 999.9Hz, 9.999KHz, 99.99KHz, 999.9KHz, 9.999MHz (Auto)
Accuracy	±(0.5%rdg+2dgt)
Over Volt Protection	600V DC or AC RMS
Sensitivity	3V
% Duty Cycle	1% to 90% (Auto)
Accuracy	±(0.5%rdg+2dgt)
Over Volt Protection	600V DC or AC RMS

1000A AC TRMS
Auto / Manual, 3⅝ Digit, 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Temperature

Ranges	
DC Voltage	600mV/6/60/600/1000V
Accuracy	± (0.5%rdg + 3dgt)
AC Voltage TRMS	600mV/6/60/600/750V
Accuracy	± (1.0% rdg + 5dgt)
AC Response	40Hz ~ 1000Hz
DC Current	600/6000μA
Accuracny	± (0.8% rdg + 10dgt)
AC Current TRMS	600/6000μA / 600 / 1000A
Accuracy	± (2.0% rdg + 30dgt)
AC Response	40 Hz ~ 1000Hz
Overload	1000A AC Max. for 1min. for A
Resistance	600Ω/6/60/600kΩ/6/60MΩ
Accuracy	± (0.8% rdg + 5dgt) on 600Ω ± (0.8% rdg + 3dgt) on 6/60/600kΩ/6MΩ
	± (1.0% rdg + 25dgt) on 60MΩ
Capacitance	9.999/99.99/999.9nF/9.999/ 99.99/999.9μF/9.999mF
Accuracy	± (3.5% rdg + 60dgt) on all ranges except ± (5.0% rdg + 10dgt) on 999.9μF& 9.999mF
Frequency	99.99Hz ~10.00MHz
Accuracy	± (0.01% rdg + 3dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (0.01% rdg + 3dgt)
Temperature	-20°C ~ 1000°C / 0°F ~ 1832°F
Accuracy	± (1% rdg + 5dgt) on - 20°C ~ 400°C ± (1.5% rdg + 15dgt) on 400°C ~ 1000°C ± (0.75% rdg + 5 dgt) on 0°F ~ 750°F ± (1.5% rdg + 15 dgt) on 750°F ~ 1832°F
μA Measurement for HVAC Flame Sensors	600.0μA / 6000μA
Accuracy	± (1% rdg + 20 dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	' ⊡ ' is indicated
Battery Life	200 hours typical
Dimension	238 x 90 x 48mm (approx.)
Weight	351gms Including Battery
Jaw Opening	30mm
Measuring Catagory	CAT IV 600V
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Instruction Manual & Carrying Case

Audible Cont.	40Ω (approx.)
Over Volt Protection	600V DC or AC RMS
Diode Test	1.0 ± 0.6mA (approx.)
Over Volt Protection	600V DC or AC RMS
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	' ⊡ ' is indicated
Dimension	250 x 98 x 35 mm (approx.)
Weight	375gms Including Battery (approx.)
Jaw Opening	Cable Dia. 55mm (max.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed)

Autoranging Digital Clampmeters - 600A DC / AC TRMS

CE

36-AUTO BL

3690 AUTO

600A DC / AC TRMS
Auto Ranging, 3⅝ Digit, 6000 Counts, Temperature, Capcitance, Data Hold, Back Light, Torch Light, Hz / Duty, NCV (LED, Buzzer & EF Strength), APO

Ranges	
AC Current TRMS	60A / 600A
Accuracy	±(2.5%rdg+8dgt) on 60A ±(2.5%rdg+5dgt) on 600A
AC Response	40Hz ~ 1KHz
Overload	600A AC max. for 1 min.
DC Current	60A / 600A
Accuracy	±(3%rdg+3dgt)
Overload	600A DC max. for 1 min.
AC Voltage TRMS	6V, 60V, 600V (Auto)
Accuracy	±(1.2%rdg+3dgt)
AC Response	40Hz ~ 1KHz
DC Voltage	600mV, 6V, 60V, 600V (Auto)
Accuracy	±(0.8%rdg+3dgt)
Temperature	-20°C to 750°C / -4°F to 1382°F
Accuracy	±(3%rdg+5dgt)
Capacitance	60nF, 600nF, 6µF, 60µF, 600µF, 6mF, 60mF (Auto)
Accuracy	±(4%rdg+3dgt)
Frequency	60Hz, 600Hz, 6KHz, 60KHz, 600KHz, 1MHz (Auto)
Accuracy	±(0.5%rdg+2dgt)
Duty Cycle	0.1% - 99.9%
Accuracy	±(0.5%rdg+2dgt)
Resistance	600Ω, 6kΩ, 60KΩ, 600kΩ, 6MΩ, 60MΩ (Auto)
Accuracy	±(1%rdg+3dgt)
Audible Continuity	30Ω (approx.)
Diode Test	1.0 ±0.6mA (approx.)
Power	Two 1.5V 'AAA' Battery
Battery Life	200 Hours Typical
Low Battery	"[+-]" is indicated
Dimension	185 x 65 x 28 mm (approx.)
Weight	170gms Including Battery (approx.)
Accessories	One Pair of Test Leads, Instruction Manual, Carrying Case, Battery (installed) K Type Thermocouple (upto 260°C)
Jaw Opening	Cable Dia. 25mm (max.)
Safety Standard	CAT II 600V

600A DC / AC
Auto / Manual, 3¾ Digit, 4000 Counts, Frequency, Data Hold, Audible Continuity, Diode Test, Δ Zero Button (for DCA), APO

Ranges	
AC Current	400A, 600A
Accuracy	±(1.75%rdg + 5dgt) (50~60Hz)
Overload	600A AC max. for 1 min.
AC Voltage	4V, 40V, 400V, 600V
Accuracy	±(1.2%rdg + 4dgt) (50~60Hz) ±(4%rdg + 5dgt) for 600V
DC Current	400A, 600A
Accuracy	±(1.5%rdg + 5dgt) for 400A ±(2%rdg + 5dgt) for 600A
Overload	600A DC max. for 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 600V
Accuracy	±(0.5%rdg + 8dgt) (400mV to 400V) ±(0.7%rdg + 2dgt) for 600V
Resistance	400Ω, 4kΩ, 40kΩ, 400kΩ, 4MΩ, 40MΩ
Accuracy	±(0.75%rdg + 8dgt) 400Ω to 400kΩ ±(1%rdg + 6dgt) 4MΩ ±(2%rdg + 4dgt) 40MΩ
Overload	600V DC / AC RMS
Frequency	100Hz, 1KHz, 10KHz, 100KHz, 500KHz
Accuracy	±(0.3%rdg + 2dgt)
Duty Cycle	1% to 90 %
Power	Two 1.5V 'AAA' Battery
Battery Life	150 hours (typical)
Low Battery	" [+-] " is Indicated
Over Range	"OL" or "-OL" is indicated
Dimension	220 x 85 x 46 mm (approx.)
Weight	280gms Including Battery (approx.)
Jaw Opening	Cable Dia. 30mm max.
Accessories	One Pair of Test Leads, Battery (installed), Instr. Manual & Carrying Case

Accessories

K Type Bead Probe (upto 260°C)
Model : TPK-B

K Type Stick Probe (upto 500°C)
Model : TP-02

Pair of Test Leads suitable for DMM/DTT
Model :
TL-DMM/DTT

Pair of Test Leads suitable for Insulation Tester
Model : TL-IT

Autoranging Digital Clampmeters - 1200A DC / 1000A AC TRMS

CE

3600

3600+

1200A DC & 1000A AC TRMS
3¾ Digit, 4000 Counts, 40 Segment Bargraph, Auto / Manual, PEAK HOLD, MAX / MIN, Δ ZERO, DATA HOLD, APO

Ranges	
AC Current TRMS	400A, 1000A
Accuracy	± (1.75% rdg + 5dgt) (50~60Hz) upto 700A (2.5%rdg + 5dgt) (50~60Hz) (700A~1000A) ± (3.5%rdg + 5dgt) (40~500Hz)
Overload	1000A AC max. for 1 min.
AC Voltages TRMS	400mV, 4V, 40V, 400V, 600V (Auto & Manual)
Accuracy	± (0.75%rdg + 4dgt) (50~60Hz) ± (2%rdg + 4dgt) (40~500Hz) Note : 400mV AC for Referance only
DC Current	400A, 1200A
Accuracy	± (1.5%rdg + 5dgts) (upto 700A) ± (2%rdg + 5dgts) (700~1200A)
Overload	1200 A DC max. for 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 600V (Auto & Manual)
Accuracy	± (0.25% rdg + 4dgts)
Resistance	400Ω, 4kΩ, 40kΩ, 400kΩ, 4MΩ, 40MΩ (Auto & Manual)
Accuracy	± (0.3%rdg + 5dgt) on 400Ω ± (0.3%rdg + 4dgt) on 4kΩ~400kΩ ± (0.5%rdg + 4dgt) on 4MΩ ± (2.0%rdg + 4dgt) on 40MΩ
Capacitance	4nF, 40nF, 400nF, 4μF, 40μF (Auto & Manual)
Accuracy	± (3%rdg + 20dgt) on 4nF (Use Δ ZERO) ± (3%rdg + 4dgt) on 40nF to 20μF ± (6%rdg + 4dgts) above 20μF
Frequency	4kHz, 40kHz (Auto & Manual) (For Non Distorted Waveforms Only)
Accuracy	± (0.1%rdg + 2dgts)
Sp. Function	Audible Continuity, Diode Test function
Power	One 9V Battery
Battery Life	150 hours (typical)
Low Battery	'▭' is indicated.
Protection	600VDC or AC rms overload protection in DCV, ACV, Diode, Ohms, Hz, Continuity.
Dimension	250 x 100 x 46 mm (approx.)
Weight	386 gms Including Battery (approx.)
Jaw Opening	Cable Dia 55mm max.
Accessories	One Pair of Test Leads, Carrying Case, Battery (installed) & Inst. Manual

1200A DC / 1000A AC TRMS
3¾ Digit, 4200 Counts, Auto Ranging, Frequency, Duty Cycle, MAX / MIN, Δ REL, DATA HOLD, APO

Ranges	
AC Current TRMS	400A, 1000A
Accuracy	±(3.0%rdg + 8dgt) 50~60Hz ±(3.5%rdg + 8dgt) 40Hz~1KHz
Overload	1200A DC/AC RMS max. 1 min.
AC Voltages TRMS	4V, 40V, 400V, 750V (Auto)
Accuracy	±(1.5%rdg + 5dgt) 50~60Hz ±(2.0%rdg + 8dgt) 40Hz~1KHz
DC Current	400A, 1200A
Accuracy	±(3.0%rdg+8dgts)
Overload	1200A DC/AC RMS max. 1 min.
DC Voltage	400mV, 4V, 40V, 400V, 1000V (Auto)
Accuracy	±(0.8%rdg + 5dgts)
Resistance	400Ω, 4kΩ, 40kΩ, 400kΩ, 4MΩ, 40MΩ (Auto)
Accuracy	±(1.5%rdg + 5dgt) on 400Ω ±(1.5%rdg + 3dgt) on 4kΩ~400kΩ ±(2.0%rdg + 5dgt) on 4MΩ, 40MΩ
Capacitance	4nF, 40nF, 400nF, 4μF, 40μF (Auto)
Accuracy	±(3%rdg + 10dgt) on all ranges except ±(4%rdg + 40dgt) on 4nF ±(4%rdg + 10dgt) on 40nF Note : on 4nF (Use Δ REL)
Frequency	9.999, 99.99, 999.9Hz, 9.999, 99.99, 999.9KHz, 9.999MHz (Auto)
Accuracy	±(0.5%rdg + 4dgts)
Duty Cycle	10~90%
Accuracy	±(0.5%rdg + 4dgts)
Temperature	-20°C ~ 750°C / -4°F ~ 1400°F
Accuracy	+(1.0%rdg + 5dgts) on -20°C ~ 400°C / -4°F ~ 650°F +(1.5%rdg + 5dgts) on 401°C ~ 750°C / 651°F ~ 1400°F
Sp. Function	Audible Continuity, Diode Test
Power	Two 1.5V "AAA" Battery
Battery Life	150 hours (typical)
Low Battery	'▭' is indicated.
Protection	600VDC or AC RMS overload protection in Capacitance, Diode, Ohms, Hz, Duty Cycle, Continuity, Temperature
Dimensions	250 x 100 x 46 mm (approx.)
Weight	386 gms Including Battery (approx.)
Jaw Opening	Cable Dia 55mm max.
Accessories	One Pair of Test Leads, Carrying Case, Battery (installed), K Type Thermocouple (upto 260°C) & Inst. Manual

Auto / Manual Ranging Digital Clampmeter - 1200A DC / 1000A AC TRMS
Auto / Manual Ranging Digital Clampmeter - 2000A DC / AC TRMS

1080-TRMS

2003A+

1200A DC/AC TRMS
Auto / Manual, 3⅝ Digit, 6000 Counts LCD with Backlight, APO, Capacitance, Frequency, Duty Cycle & Temperature

Ranges	
DC Voltage	600mV / 6 / 60 / 600 / 1000V
Accuracy	± (0.5%rdg + 3dgt)
AC Voltage TRMS	600mV / 6 / 60 / 600 / 750V
Accuracy	± (1.0% rdg + 5dgt)
AC Response	40Hz~1000Hz
DC Current	600 / 6000µA / 60 / 600 / 1200A
Accuracy	± (1.2% rdg + 10dgt) on 600 / 6000µA ± (2.0% rdg + 30dgt) on 60 / 600 / 1200A
Overload	1200A DC Max. for 1min. for A
AC Current TRMS	600 / 6000µA / 60 / 600 / 1200A
Accuracy	± (2.0% rdg + 30dgt)
AC Response	40 Hz~1000Hz
Overload	1200A AC Max. for 1min. for A
Resistance	600Ω / 6 / 60 / 600kΩ / 6 / 60MΩ
Accuracy	± (0.8% rdg + 5dgt) on 600Ω ± (0.8% rdg + 3dgt) on 6 / 60 / 600kΩ / 6MΩ ± (1.0% rdg + 25dgt) on 60MΩ
Capacitance	9.999 / 99.99 / 999.9nF / 9.999 / 99.99 / 999.9µF / 9.999mF
Accuracy	± (3.5% rdg + 60dgt) on all ranges except ± (5.0% rdg + 10dgt) on 999.9µF & 9.999mF
Frequency	99.99Hz~10.00MHz
Accuracy	± (0.01% rdg + 3dgt)
Duty Cycle	0.1%~99.9%
Accuracy	± (0.01% rdg + 3dgt)
Temperature	-20°C~1000°C / 0°F~1832°F
Accuracy	± (1% rdg + 5dgt) on - 20°C~400°C ± (1.5% rdg + 15dgt) on 400°C~1000°C ± (0.75% rdg + 5 dgt) on 0°F~750°F ± (1.5% rdg + 15 dgt) on 750°F~1832°F
µA Measurement for HVAC Flame Sensors	600.0µA / 6000µA
Accuracy	± (1% rdg + 20 dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	One 9V Battery
Low Battery	'[+-]' is indicated
Battery Life	200 hours typical
Dimension	238 x 90 x 48mm (approx.)
Weight	320gms Including Battery (approx.)
Jaw Opening	30mm
Measuring Catagory	CAT IV 600V
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Instruction Manual & Carrying Case

2000A DC / 2000A AC TRMS
3⅝ Digit, 6000 Counts, 60 Segment Bargraph, Auto / Manual, Δ ZERO, Hz / Duty, RPM, MIN-MAX, Data Hold, Audible Continuity, APO

Ranges	
AC Current TRMS	600A, 2000A
Accuracy	±(3.5%rdg + 5dgt)
Overload	2000A AC max. for 1 min.
AC Voltage TRMS	6V, 60V, 600V (Auto & Manual)
Accuracy	±(1%rdg + 6dgt) (50 ~ 60Hz) ±(2%rdg + 4dgt) (40 ~ 500Hz)
Overload	600V DC / AC RMS
DC Current	600A, 2000A
Accuracy	±(2.5%rdg + 5dgt)
Overload	2000A DC max. for 1 min.
DC Voltage	600mV, 6V, 60V, 600V (Auto & Manual)
Accuracy	±(0.5%rdg + 5dgt)
Overload	600V DC / AC RMS
Resistance	600Ω, 6kΩ, 60kΩ, 600kΩ, 6MΩ, 60MΩ, (Auto & Manual)
Accuracy	±(0.3%rdg + 8dgt) 600Ω ±(0.3%rdg + 5dgt) 6~600kΩ ±(0.5%rdg + 5dgt) 6MΩ ±(2%rdg + 5dgt) 60MΩ
Overload	600V DC/AC RMS
Frequency	9.999Hz ~ 999.9KHz (Auto)
Accuracy	±(0.1 %rdg + 2dgt) (for non distorted waveforms only)
% Duty Cycle	1% to 90%
Accuracy	±(0.5%rdg + 5dgt)
RPM	9.999K RPM, 99.99K RPM (Auto)
Accuracy	±0.5%rdg of fullscale
Capacitance	40nF, 400nF, 4µF, 40µF (Auto)
Accuracy	±(3%rdg + 40dgt) on 40nF (Use Δ ZERO) ±(3%rdg + 10dgt) on 400nF to 4µF ±(6%rdg + 10dgts) on 40µF
Overload	600V DC / AC rms.
Sp. function	Audible Continuity, Diode Test
Power	One 9V Battery
Battery Life	150 hours (typical)
Low Battery	"[+-]" is Indicated
Over Range	"OL" or "-OL" is indicated
Dimensions	250 x 100 x 46 mm (approx.)
Weight	410 gms Including Battery (approx.)
Jaw Opening	Cable Dia 55mm max.
Accessories	One Pair of Test Leads, Battery (installed), Instruction Manual & Carrying Case

MECO®

SINCE 1962

BEST INSULATION TESTER AWARD

BEST ELECTRONIC EARTH RESISTANCE TESTER AWARD

Testing & Measuring Instruments • Others

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Insulation Tester - Analog

CE

TYPE TEST Confirming to BIS 10656-83

MC-900 Series/MC-900BA Series

Adaptor (MC-900BA Series)

Features

- Single Person Push Button Operation
- High Accuracy ± 5% of Indicated Value in Effective Range
- Scale Length : 80mm (approx.)
- Terminal Voltage : > 85% of Rated Voltage for Insulation Resistance
- Measurement from 10% to 100% of the Insulation Resistance Range
- ABS Resin Yellow Case with Polycarbonate Meter Front Cover
- Meets Requirement of IEC 61010, Installation Category II, 1000VPhase Earth
- Designed to Generally Confirm to IS 10656-1983
- 7 Models with various Voltage & MOhm Ranges
- Battery Adaptor (Optional) for MC-900BA Series

Applications

Ideal for Insulation Resistance Measurement of

- Electrical Equipment (Motors, Transformers, Machines, etc.)
- Cables for Communication Networks
- Industrial, Commercial & Residential Installations
- Electrical Cables for Distribution Networks
- House Hold Appliances (Washing Machines, Mixer, Toaster, etc.)

Model	Range	Test Voltage DC
MC-901 / MC-901BA	0 - 20 M Ohms	100 V
MC-903 / MC-903BA	0 - 100 M Ohms	500 V
MC-904 / MC-904BA	0 - 500 M Ohms	500 V
MC-941 / MC-941BA	0 - 1000 M Ohms	500 V
MC-906 / MC-906BA	0 - 200 M Ohms	1000 V
MC-907 / MC-907BA	0 - 500 M Ohms	1000 V
MC-981 / MC-981BA	0 - 2000 M Ohms	1000 V

Specifications

Accuracy	± 5% of Indicated Value at 27° C ± 5° C
Operating Temperature	0° to 50° C
Storage Temperature	-10° C to 60° C
Relative Humidity	80% Maximum
Low Battery	When Battery Voltage Drops below Operating Voltage, Pointer cannot reach zero after shorting the Output Terminals.
Power	9V (6 x 1.5V AA) Battery
Dimensions	144.5 x 95 x 72.5 mm (approx.)
Weight	438.6 gms Including Battery (approx.)
Standard Accessories	Pair of Crocodile / Alligator Test Leads (Red & Black) x 1, Carrying Case x 1, 1.5V AA Batteries x 6 (Fitted - In), Battery Adaptor (Optional) for MC-900BA Series [Adaptor Input : 100 - 240V, 50 / 60Hz, 0.3A, Output : 9V⎓500mA]
Dielectric Strength	3.5 KV @ 50Hz for 1 min. between Input Terminals & Case
Insulation Resistance	More than 50M Ohm at 500V between Circuit & Case

Insulation Tester - Digital

CE

TYPE TEST Confirming to BIS 10656-83

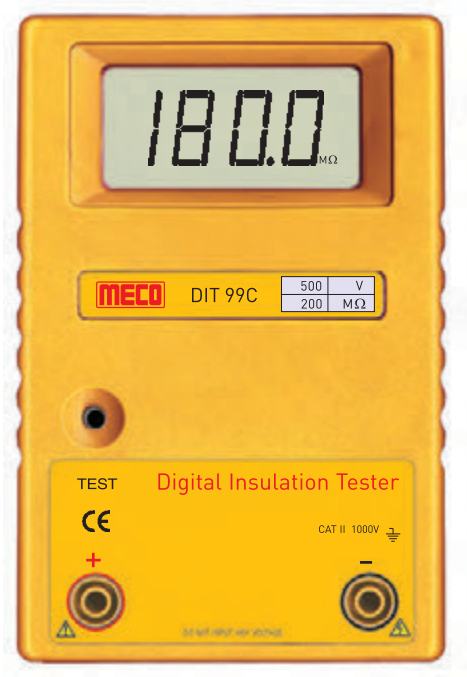

DIT 99 Series

Features

- 3½ Digit 17mm LCD Display
- High Accuracy ± (3% rdg + 2 dgt)
- Single Person Push Button Operation
- Designed to Generally Confirm to IS 10656-1983
- Meets Requirement of IEC 61010, Installation Category II, 1000V Phase - Earth
- Terminal Voltage more than 85% of rated Voltage for Insulation Resistance Measurement from 10% to 100% of the Insulation Resistance Range
- 5 Models with various Voltage & MOhm Ranges
- Carrying Case

Applications

Ideal for Insulation Resistance Measurement of

- Electrical Equipment (Motors, Transformers, Machines, etc.)
- Electrical Cables for Distribution Networks
- Cables for Communication Networks
- House Hold Appliances (Washing Machines, Mixer, Toaster, etc.)
- Industrial, Commercial & Residential Installations

Model	Range	Test Voltage DC	Resolution
DIT 99A	0 - 20 M Ohms	100 V	0.01 M Ohms
DIT 99B	0 - 200 M Ohms	250 V	0.1 M Ohms
DIT 99C	0 - 200 M Ohms	500 V	0.1 M Ohms
DIT 99D	0 - 200 M Ohms	1000 V	0.1 M Ohms
DIT 99E	0 - 2000 M Ohms	1000 V	1 M Ohms

Specifications

Display	3½ digit LCD display, 17mm height with a maximum reading of 1999
Accuracy	± (3% rdg + 2 dgt) at 27^{0}C ± 5^{0}C
Conversion Rate	2.5 sec
Over-Range Indication	" 1 " is Displayed
Operating Temperature	0^0 to 50^0 C
Storage Temperature	-20^{0}C to 60^{0}C
Relative Humidity	80% Maximum
Low Battery	' [+-] ' is Displayed when Battery Voltage drops below Operating Voltage
Power	9V (6 x 1.5V AA) Battery
Dimensions	145 x 95 x 59 mm (approx.)
Weight	370gms Including Battery (approx.)
Standard Accessories	1 x Pair of Crocodile / Alligator Test Leads (Red & Black) 1 x Carrying Case 6 x 1.5V AA Batteries (Fitted - In) 1 x Instruction Manual
Dielectric Strength	3.5 KV @ 50Hz for 1 min. between Input Terminals & Case
Insulation Resistance	More than 50MOhm at 500V between Circuit & Case

2.5kV - 20GΩ Digital Insulation Tester with AC Voltage Function

CE

Product Kit

Insulation Resistance Measurment Test Leads

DIT918

Alkaline Batteries

Carrying Bag

Introduction

MECO - DIT 918 is a 2.5KV Digital Insulation Tester with 3½ Digit (1999 Counts) Large Display. It measures Insulation Resistance upto 20GΩ and AC Voltage upto 600VAC. It is ideally suited for testing of Insulation Resistance and Voltage of Transformers, Switches, High Voltage Systems, Cables, Appliances, Motors etc.

Features

- 3½ Digit (1999 Counts) Large LCD Display
- High Accuracy for Insulation Measurement and for AC Voltage Measurement
- Range Selection & Single Person Push Button Operation
- Data Holding Function, Function Icons on Display
- Measurement of AC Voltage upto 600VAC
- Auto Range (Insulation Test)
- Red LED Indicator for HV (High Voltage)
- Battery Operated
- As per IS10656-1983
- As per Safety Standard IEC/EN 61010-1 & 61010-31
- Over Voltage CAT III, 300V
- As per EMC Standard IEC 61326 Class B

Electrical Specifications

Accuracy : ±(% reading + digits) at 23°C±5°C; RH≤75%

Specification	Test voltage	Range	Accuracy	Resolution
Insulation Resistance	500V / 1000V / 2500V DC	0.1MΩ to 200MΩ	±(3%rdg+5 dgt.)	0.01MΩ to 0.01GΩ
		200MΩ to 10GΩ	±(5%rdg+5 dgt.)	
		10GΩ to 20GΩ	±(10%rdg+5 dgt.)	
AC Voltage Measurement	0 ~ 600VAC (40 ~ 60Hz)	-	±(2%rdg+5 dgt.)	1V

General Specifications

Display	3½ Digit (1999 Counts) Large LCD Display with 20 mm Digit Height
High Voltage Indication	✓
Data Hold	✓
Low Battery Indication	✓
Low Resistance Warning	✓
Operating Temperature	0°C to 40°C (RH ≤ 80%)
Storage Temperature	- 10°C to 50°C (RH ≤ 85%)
Power	9V (AA Size x 6pcs Alkaline Batteries)
Dimensions	150 x 100 x 70mm (approx.)
Weight	680 gms including batteries (approx.) for DIT 918 Meter only, Weight of Accessories extra
Standard Accessories	Insulation Resistance Measurement Test Leads x 1 Set 1.5V AA Batteries x 6 pcs Carrying Bag x 1 pc Instruction Manual x 1 pc

5kV - 200GΩ Digital Insulation Tester with AC Voltage, Phase Sequence & Phase Status Indicator

new

CE

DIT 954 / DIT 954R

Product Kit

Alkaline Batteries (DIT 954)

Insulation Resistance Measurement Test Leads

Phase Sequence Measurement Wire

Heavy Duty Carrying Bag

Built-In Rechargeable Batteries (DIT 954R)

AC Adaptor

Introduction

MECO - DIT 954 / DIT 954R are 5KV Digital Insulation Testers with 3½ Digit (1999 Counts) Large Display and Backlight. This measures Insulation Resistance upto 200GΩ, AC Voltage upto 600VAC and check Phase Sequence and Phase Status Indication.

Features

- 3½ Digit (1999 Counts) Large LCD Display
- Range Selection & Single Person Push Button Operation
- LCD with Green Backlight
- Data Holding Function
- Display with Annunciators
- Measurement of AC Voltage upto 600VAC
- Measurement of Phase Sequence Between (Phase - Phase Voltage) with LED Indicators & Beep Facility
- Auto Range (Insulation Test)
- Red LED Indicator for HV (High Voltage)
- Inbuilt Protection Circuit to prevent the harm of reverse Voltages.
- Battery Operated with AC Adaptor
- Suitable for Calculating PI & DAR (Manually)
- As per IS10656-1983
- As per EMC Standard IEC 61326-1 Class B
- Over Voltage CAT III, 600V
- As per Safety Standard IEC/EN 61010-1 & 61010-31
- IP 44 Protection

Electrical Specifications

Accuracy : ±(% reading + digits) at 23°C ±5°C; RH≤75%

Specification	Test voltage	Range	Accuracy	Resolution
Insulation Resistance	1000V / 2500V / 5000V DC	0.1MΩ to 200MΩ	±(3%rdg+5 dgt.)	0.01MΩ to 0.1GΩ
		200MΩ to 10GΩ	±(5%rdg+5 dgt.)	
		10GΩ to 200GΩ	±(10%rdg+5 dgt.)	
AC Voltage Measurement	0 ~ 600VAC (40 ~ 60Hz)	-	±(2%rdg+5 dgt.)	1V
Phase Sequence Test	100V ~ 450V (Phase to Phase) 40 ~ 60Hz	-	-	-

General Specifications

Display	3½ Digit (1999 Counts) Large LCD Display with 29mm Digit Height
Over-Range Indication	'1' is displayed
Operating Temperature	0°C to 40°C (RH ≤ 80%)
Storage Temperature	- 10°C to 50°C (RH ≤ 75%)
Power	12V (AA Size x 8 pcs Batteries) [Alkaline Type for DIT 954 and Rechargeable for DIT 954R] with AC Adaptor
Dimensions	190 x 155 x 75mm (approx.)
Weight	900 gms including batteries (approx.)
Standard Accessories	Insulation Resistance Measurement Test Leads for High Voltage x 1 Set, Phase Sequence Measurement Wires x 1 set, AC Adaptor x 1 pc, AA Alkaline Batteries x 8 pcs for DIT 954, AA Rechargeable Batteries x 8 pcs for DIT 954R, Heavy Duty Carry Bag x 1 pc, Instruction Manual x 1 no.

Phase Sequence Indicator

CE

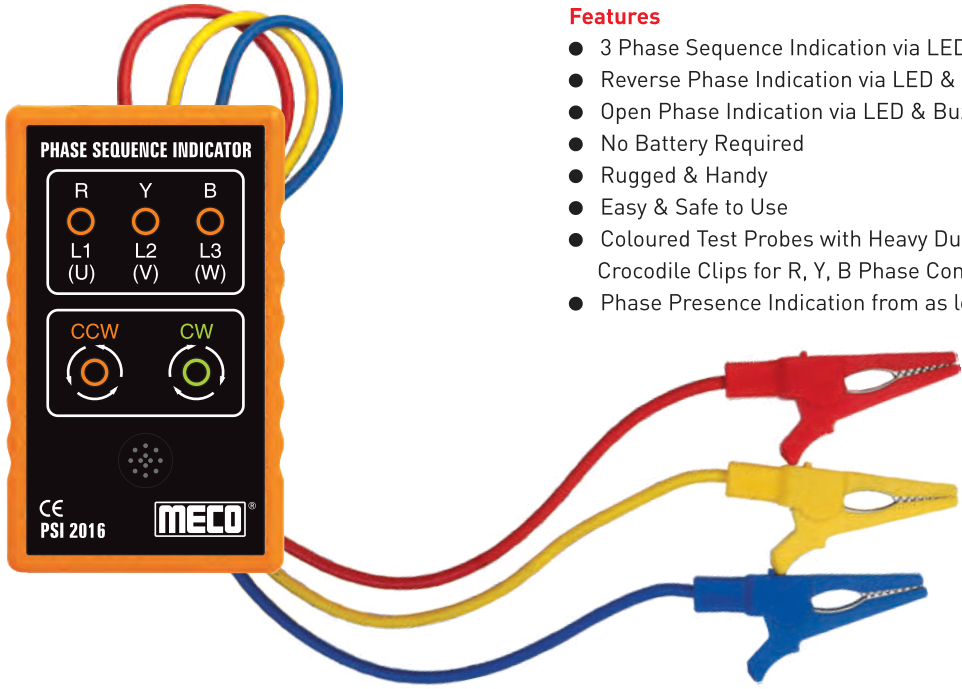

PSI 2016

Features

- 3 Phase Sequence Indication via LED & Buzzer
- Reverse Phase Indication via LED & Buzzer
- Open Phase Indication via LED & Buzzer
- No Battery Required
- Rugged & Handy
- Easy & Safe to Use
- Coloured Test Probes with Heavy Duty Insulated Crocodile Clips for R, Y, B Phase Connections
- Phase Presence Indication from as low as 60V AC (PH-N)

Introduction

In Electrical Systems, sometimes without identification of Phase Sequence it is impossible to proceed further. The Phase Sequence Indicator is used to determine the Phase Sequence R, Y & B of 3 Phase Voltages. It is important that Phase Sequence is known properly prior to energizing electrical motors and other equipment, as incorrect connection could cause damage to the equipment. The correct operation of measuring instruments like 3 Phase Energy Meter, 3 Phase Power Meter & Automatic Control of devices also depends on the Phase Sequence.



Correct Phase (CW)
- All 3 Yellow LED's ON
- Green LED ON
- Intermittent Beep



Reverse Phase (CCW)
- All 3 Yellow LED's ON
- Red LED ON
- Continuous Beep



Open Phase (One Phase Only)
- Yellow LED for Open Phase is OFF e.g. R Phase LED OFF
- Both Green & Red LED's OFF
- Continuous Beep

Electrical Specifications	
Voltage Range	60 - 600V AC
Frequency Range	40 - 400Hz
Operating time for continuous Measurement	60 minutes Max. at 200VAC, 4 minutes Max. at 500VAC
Withstand Voltage	4000 V for one minute
Environmental Specifications	
Storage Temperature	- 20°C ~ 60°C
Operating Temperature	- 10°C ~ 40°C
Safety Specifications	
Electrical Safety	EN 61010 - 1
Over Voltage category	CAT III 600 V, CAT IV 300V
Mechanical & General Specifications	
Size	100 x 60 x 24.5mm (approx.)
Weight	185g (approx.)
Case & Housing Material	ABS
Accessories	Test Leads with Insulated Crocodile Clips & Carrying Case.

Non - Contact Phase Sequence & Motor Rotation Checker

new

Preliminary Data

CE

PSI-NC

Features

- 3P Phase Sequence Indication via LED
- Reverse Phase Indication via LED
- Safe & Fully Insulated Non-Contact Alligator Clips
- LEDs Indicate Phase Orientation, Clockwise or Counter Clockwise and Which Phase is Live
- Low Battery Warning
- Auto Power Off
- Durable, Ergonomic Housing
- 3-Phase Motor Rotation Checking
- Detection of Open Phase, Live Power, Circuit Break & Voltage

Introduction

Non-Contact Phase Sequence Indicator & Motor Rotation Checker is used to determine the phase sequence R, Y & B of 3P voltages. The three fully insulated non contact alligator clips avoid direct connection to bare conductors and wires ensuring operator safety. It can also detect the motor rotation with non-contact magnet detection principle.

Indication	↻	↺	R	Y	B
Rotate Clockwise (CW)	○	●	●	●	●
Rotate Counter-Clockwise (CCW)	●	○	●	●	●
R Missing	NA	NA	○	●	●
Y Missing	NA	NA	●	○	●
B Missing	NA	NA	●	●	○

Electrical Specifications	
Voltage Range	70 - 600V AC
Frequency Range	50 - 60HZ
Insulation	5.4K Vrms
Max Rated Power	300mVA
Environmental Specifications	
Storage Temperature	- 20°C ~ 60°C
Operating Temperature	- 10°C ~ 55°C
Safety Specifications	
Electrical Safety	EN61010-1, EN61010-031
Over Voltage Category	CAT III 600V
Mechanical & General Specifications	
Size	110 x 70 x 30mm
Weight	150gm
Probe Length	0.5m
Power	3V DC (2 x 1.5V AA Batteries)
Accessories	Test Leads with Fully Insulated Alligator Clips, Carrying Case & AA Size Batteries

Leakage Current Tester

CE

4671

Features

- 10µA Ultra High Resolution
- Large Conductor Diameter (30mm)
- AC Current in 5 Ranges (40mA, 400mA, 4A, 40A, 60A)
- Wide Frequency Response (40Hz~1KHz)
- AC A, AC V, Ω and Continuity
- Large 3¾ Digit LCD (4000 Count)
- 40 Segment Fast Bargraph Display (30 times/sec.)
- Data Hold and Max/Min Hold
- Relative Measurement
- 600 Vrms Overload Protection in Resistance Range

General Specifications

Jaw Opening	Cable Dia 30mm. max. (approx.)
Battery Type	Two 1.5V SUM-3
Display	3¾ LCD with 40 Segment Bargraph
Range Selection	Manual
Overload Indication	OL
Power Consumption	15mA (approx.)
Low Battery Indication	B
Sampling Time	3 time/sec. (display) 30 time/sec. (bargraph)
Operating Environment	-10⁰ to 50⁰C, RH < 85%
Storage Environment	-20⁰C to 60⁰C, RH < 75%
Altitude	up to 2000M
Dimensions	210 x 72 x 36 mm
Weight	210gms Including Battery(approx.)
Accessories	Carrying Case x 1, Users Manual x 1, Battery (installed), Test Leads x 1 pair

Fault Tracing of Live Installation

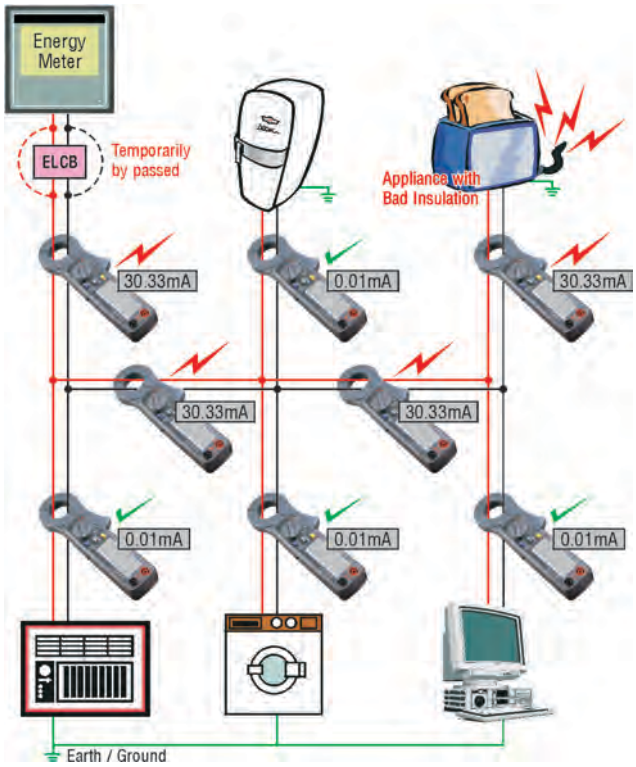

Specifications (23⁰C ±5⁰C)

AC Current

Range	Resolution	Accuracy	
		50/60 Hz	Wide (40Hz~1KHz)
40 mA	10 µA	±1.0%rdg ± 3dgts	±2.0%rdg ± 5dgts
400 mA	100 µA		
4 A	1 mA		
40 A	10 mA		
60 A (0~50A)	100 mA	±1.5%rdg ± 3dgts	±3.0%rdg ± 5dgts
60 A (50~60A)	100 mA	±3.0%rdg ± 5dgts	±3.5%rdg ± 5dgts

Though the Meter can Display upto 400A, the Calibration is valid upto 60A

Resistance (Ω) and Continuity (Open Voltage 0.4V)

Range	Resolution	Accuracy	Beeping	OL Protection
40~400Ω	0.1Ω	±1.0%rdg ± 2dgts	<38.0Ω	AC 600V

AC Voltage (Input Impedance : 10 MΩ)

Range	Resolution	Accuracy		Overload Protection
		50/60 Hz	40~1KHz	
400V	0.1V	±1.5%rdg ± 2dgts	±2.0%rdg ± 4dgts	AC 800V

Application

Leakage Current Tester

new

Preliminary Data

CE

4671A

Features

- 10µA Ultra High Resolution
- Large Conductor Diameter (30mm)
- AC Current in 4 Ranges (20mA, 200mA, 2A, 60A)
- Wide Frequency Response (40Hz~400Hz)
- AC A, AC V, DC V
- Large 3½ Digit LCD (1999 Count)
- Data Hold
- Low Battery Indication
- Auto Power Off
- Wristlet

General Specifications

Jaw Opening	Cable Dia 30mm. max. (approx.)
Battery Type	Two 1.5V 'AAA' Battery
Display	3½ Digits 1999 Counts LCD
Range Selection	Manual
Overload Indication	OL
Power Consumption	15mA (approx.)
Low Battery Indication	+ −
Sampling Time	3 time/sec.
Operating Environment	-10° to 50°C, RH < 85%
Storage Environment	-20°C to 60°C, RH < 75%
Altitude	up to 2000M
Dimensions	183 x 63 x 29 mm
Weight	160gms Including Battery (approx.)
Accessories	Battery (installed) x 2, Test Leads x 1 pair, Carrying Case x 1, Users Manual x 1

Fault Tracing of Live Installation

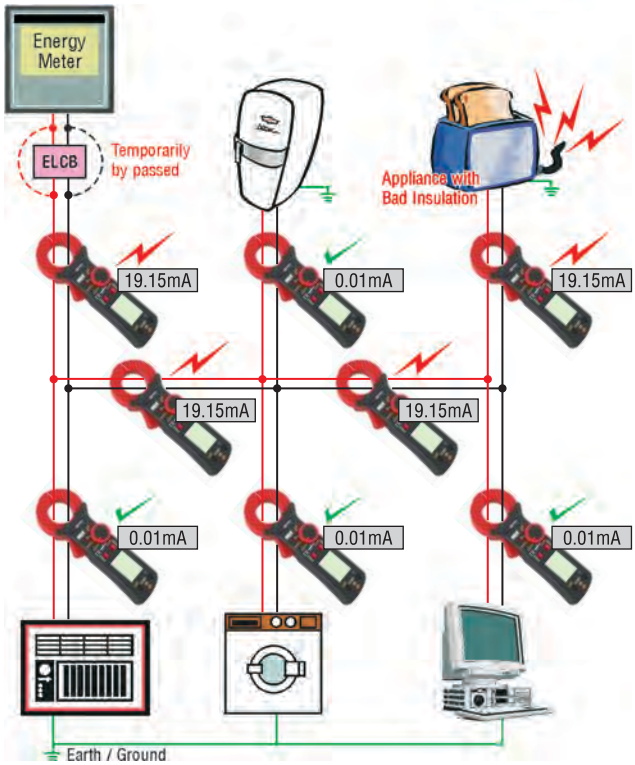

Specifications (23°C ±5°C)

AC Current (40Hz ~ 400Hz)		
Range	**Resolution**	**Accuracy**
20 mA	0.01 mA	±(2.5%rdg ± 5dgts)
200 mA	0.1 mA	
2 A	0.001 A	
60 A	0.1 A	±(3.0%rdg ± 8dgts)

Though the Meter can Display upto 200A, the Calibration is valid upto 60A

AC Voltage (40Hz ~ 400Hz)		
Range	**Resolution**	**Accuracy**
600V	1V	±(2.0%rdg ± 5dgts)

DC Voltage		
Range	**Resolution**	**Accuracy**
600V	1V	±(2.0%rdg ± 5dgts)

Application

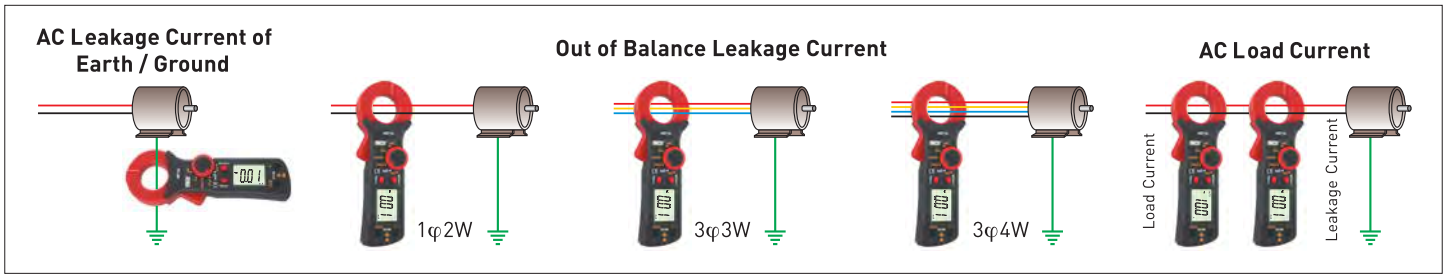

Digital Earth Tester

CE

DET 2016

Precision Earth Resistance Measurment

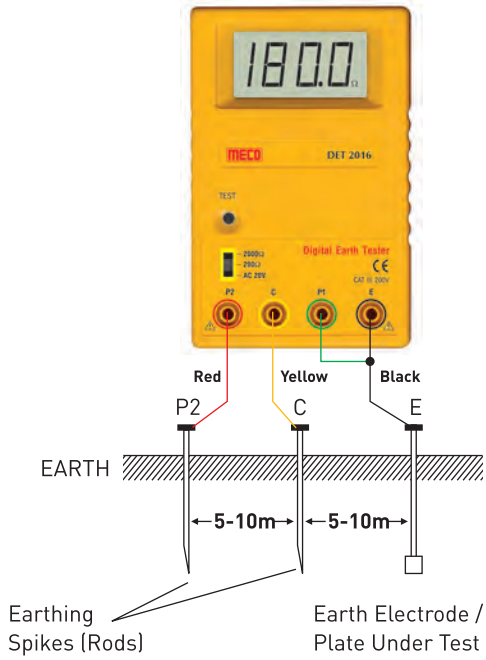

Introduction

MECO DET 2016 is designed with technical know how from FUSO Electric Company of Japan. It is useful for measurment of Earth Resistance of Earthing used in the Electrical Equiptment. This Instrument finds wide applications for testing Earthing of installations in Power Industries, Telecommunication Networks & Electrical Traction Systems etc. It also measures Earth Voltage.

Features

- 3½ Digit (1999 Counts) LCD Display
- Auto Power Off Function (after 5min.)
- Low Battery Warning Indication
- Capable of Measuring Earth Voltage (0 - 20V AC)
- Small, Light Weight & Portable
- Extremely Simple to Operate Connect - Press - Read
- Designed to Reject High Levels of Noise & Interference
- Designed to Generally Confirm to IS10656-1983
- Range Selection & Single Person Push Button Operation Switches
- Two Ranges for Earth Resistance Measurement
- Functions Icons on Display
- Battery Operated
- IEC 1010 CAT III 200V
- Sturdy, Elegant & Compact Body

Electrical Specifications

Specification	Range	Resolution
Earth Resistance	0 - 200Ω	0.1Ω
	0 - 2000Ω	1Ω
Earth Voltage	0 - 20VAC	0.01VAC

General Specifications :

Display	3½ dgt. (1999 Counts) LCD Display with 17mm height.	
Accuracy	± 3% rdg. + 5 dgt. For Earth Resistance	at 23°C ±5°C
	± 1% rdg. + 2 dgt. For Earth Voltage	
Conversion Rate	2.5 Sec	
Over Range Indication	"1" is displayed	
Operating Temperature	0° to 50°C	
Storage Temperature	-20° to 60°C	
Relative Humidity	80% Maximum	
Low Battery	' [+-] ' Is Displayed when Battery Voltage drops below Operating Voltage	
Power	9V (6 x 1.5V 'AA') Batteries	
Dimensions	145 x 95 x 59mm (approx.)	
Weight	390gms. Including Battery (approx.)	
Accessories (Standard)	Carrying Case x 1, 1.5V 'AA' Batteries (fitted in) x 6, Instruction Manual x 1, Carton x 1	
Accessories (Optional)	Test Leads x 1 Set (Red, Yellow, Black), Earthing Spikes (Rods) x 3, Hammer x 1, Carrying Case	
Dielectric Strength	2.5KV @ 50Hz for 1min, between Input Terminals & Case	
Insulation Resistance	More than 50MΩ @ 500V between Circuit & Case	

H.V. Safety Voltage Detector
Non-Contact Voltage Detector

new

Preliminary Data

CE

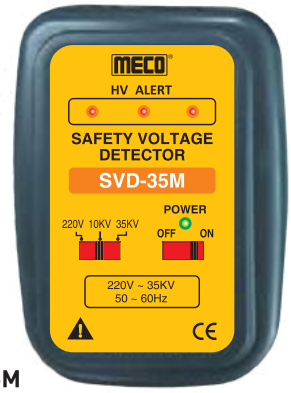

SVD-35M

H.V. Safety Voltage Detector is a personal safety sensor for AC High Voltage detection. It provides electrical engineering personnel, fire fighting personnel and instrument equipment worker with a prominence warning when approaching high voltage. It helps to take necessary safety action, preventing illusion and misjudgment which could lead to electric shock to an individual.

Applications

On Arm

On Pocket

On Helmet

Features

- AC Voltage Detection Range : 220V ~ 35KV AC
- Compact, Easy-to-Wear on Body or Belt
- Indoor and Outdoor Use
- High Pitch Sound & LED Indication
- Low Power Consumption

Specifications

Type	SVD-35M (Multiple Voltage)		
Alarm Voltage Range (Minimum Sensing Voltage)	220V ~ 380V (PH-G)	10KV (PH-G)	35KV (PH-G)
Distance	0.4 ~ 0.6m	0.8 ~ 1.0m	1.8 ~ 2.0m
Applicable Frequency	50 ~ 60Hz		
Alarm Volume	≥ 70dB (at 1m)		
Operating Environment	-10°C ~ 50°C (RH ≤ 80%)		
Power	1.5V AA LR6 Battery x 2pcs		
Battery Life	≥ 50 Hours of Continuous Use		
Dimension	110 x 70 x 30mm		
Weight	150gms (approx.)		
Standards and Safety	EN61326-1, CE, ROHS		
Accessories	Instruction Manual x 1pc, Helmet Belt x 1pc, Arm Belt x 1pc & Battery x 2pcs		

new

Preliminary Data

CE

NCVD-1000

NCVD-1000SA

Functions	Safe Non Contact Voltage Detection, LED Light / Torch	Low Voltage Indication , Zero / Live Line Judgement, NCV Sensitivity (Low / Medium / High), Auto Power Off
Voltage Range	90 ~ 1000V AC	12 ~ 1000V AC
Frequency Range	50 ~ 60Hz	50 ~ 60Hz
Alarm Mode	Bright LED with Audible Sound (Buzzer)	Audible Sound and Light Alarm
Electric Torch	Pen Pointer	White LED Illumination Lamp
NCV Sensitivity	Fixed	Selecting 3 Types of Sensitivity Automatically (Low / Medium / High) with Different Sound and LED Color
Measurement Category	CATIII, 1000V	CAT III, 1000V / CAT IV 600V
Safety Standard	Pollution Degree 2	Pollution Degree 2
Power	1.5V AAA x 2 Batteries	1.5V AAA x 2 Batteries
Dimension	153 x 25 x 18mm (approx.)	156 x 22 x 22mm (approx.)
Weight	42gms (approx.)	70gms (approx.)
Accessories	1.5V (AAA) x 2 Batteries	1.5V (AAA) x 2 Batteries, Instruction Manual

Clamp - On Earth / Ground Resistance & Leakage Current Tester (65 x 32mm Jaw)

CE

Carry Bag

Resistance Verification Plate

4680BL, 4680BLC

The faults in any Electrical System are unavoidable. Earthing plays an important role in Generation, Transmission & Distribution for safe and proper operation of any Electrical Installation. **MECO 4680BL/4680BLC Clamp-On Earth / Ground Resistance Tester** has long elliptical jaw suitable for flat as well as round earthing strips. It completely eliminates the use of ground and auxiliary rods thus saving lot of time and avoiding shutdown. Calibration check can be verified by using the Resistance Verification Plate provided. This is an extremely handy instrument especially at place where it is next to impossible to measure Earth / Ground Resistance by conventional methods. Substantial time saving and easy operating justify the investment in these instruments.

Features

- Non Contact Ground Resistance Measurement
- No Auxillary Electrodes Needed
- Data Storing Memory
- Data Hold, Noise Signal
- Ground Resistance Measurement 0.01Ω ~1000Ω
- Suitable for Earthing Strip upto 65mm
- Suitable for Round Conductor upto 25mm Φ
- Leakage Current (0.5mA~30.00A) (Model 4680BLC)
- Auto Ranging
- Continuity Loop Test
- Auto Power Off

General Specifications

Jaw	: 65 x 32 mm (approx.)
Conductor Size	: Upto 65 mm / 25 mm Φ
Battery Type	: 1.5V (AA) x 4 (Alkaline)
Display	: 4 Digit 9999 counts LCD
Range Selection	: Auto
Memory	: 99 Sets
Overload Indication	: OL
Low Battery Indication	: B
Operating Environment	: -10°C ~ 55°C
Dimensions	: 293 x 90 x 66 mm
Weight	: 1250 gms Including Battery (approx)
Accessories	: Resistance Verification Plate x 1, Battery 1.5V (AA) x 4 (Installed), User Manual x 1, Carry Bag x 1
Configurable Alarm	: Resistance : 1~199Ω Current : 1~499mA

Electrical Specifications (23°C ± 5°C)

Ground Resistance (Auto Range) (4680BL, 4680BLC)

Range	Resolution	Accuracy of Reading
0.010 ~ 0.099 Ω	0.001 Ω	± (1%+0.01 Ω)
0.10 ~ 0.99 Ω	0.01 Ω	± (1%+0.01 Ω)
1.0 ~ 49.9 Ω	0.1 Ω	± (1.5%+0.1 Ω)
50.0 ~ 99.5 Ω	0.5 Ω	± (2%+0.5 Ω)
100 ~ 199 Ω	1 Ω	± (3%+1 Ω)
200 ~ 395 Ω	5 Ω	± (6%+5 Ω)
400 ~ 590 Ω	10 Ω	± (10%+10 Ω)
600 ~ 1000 Ω	20 Ω	± (20%+20 Ω)

Ground & Leakage Current : Auto Ranging, 45/65Hz, RMS (4680BLC)

Range	Resolution	Accuracy of Reading
0 ~ 80 mA	0.05 mA	± (2.5%+1 mA)
80 mA ~ 650 mA	0.5 mA	± (2.5%+2 mA)
650 mA ~ 4 A	5 mA	± (2.5%+10 mA)
4 A ~ 30 A	10 mA	± (2.5%+20 mA)

Applications

Hazards due to improper earth / ground happen around us everyday. Systems are becoming more and more complex and faults in any system are unavoidable. Every electrical equipment, appliance or network must be properly earthed to allow a low resistance path for dissipation of leakage current into the earth. MECO Clamp-On Earth / Ground Resistance Tester can measure accurately within a few minutes the ground resistance & AC current (load & leakage) of all types of installations by just clamping to the grounding lines without disconnecting the circuit or driving auxiliary electrodes. A few of the applications have been illustrated below :

Transmission Towers / Lightning Arrestors

Distribution Towers / Feeders

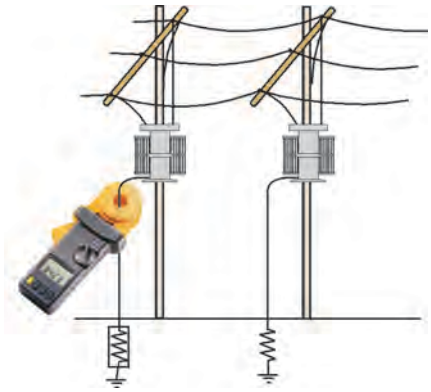

Passive Lines / Power-Off

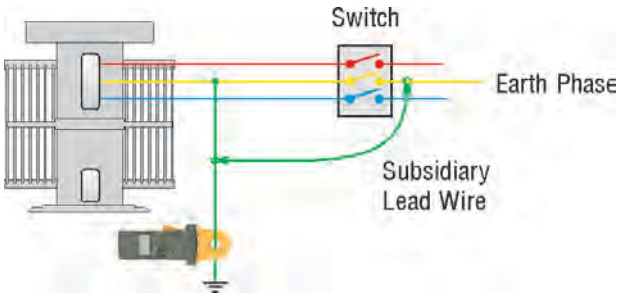

Active Lines / Power-On

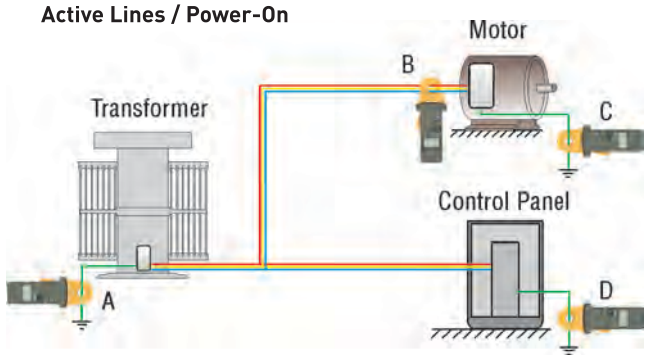

Telecommunication Exchange / System

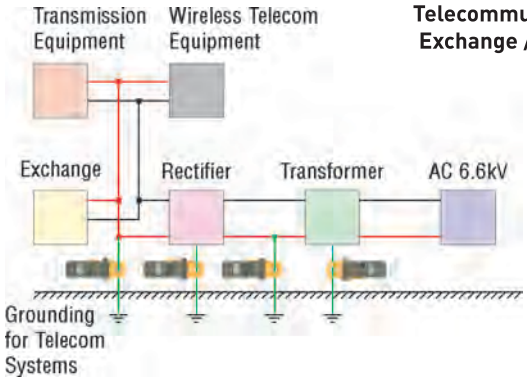

Telecom Shelter Cabins / Telecast-Relay Towers

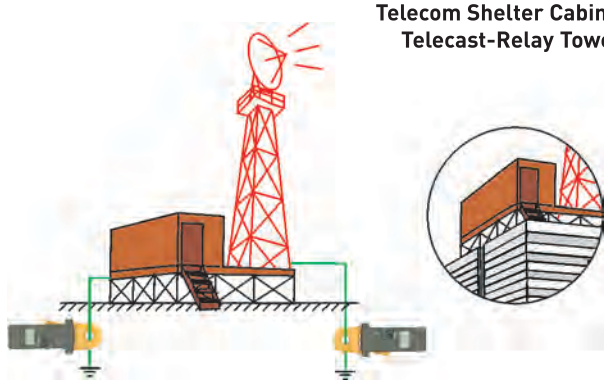

Hazardous Storage Tanks for Petrol / Oil / Gas / Chemicals

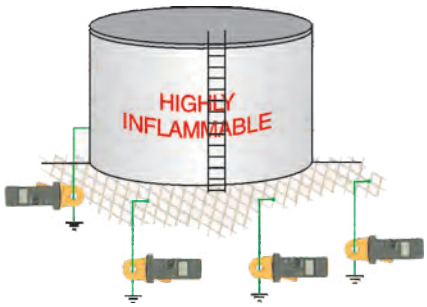

Household Electrical Appliances

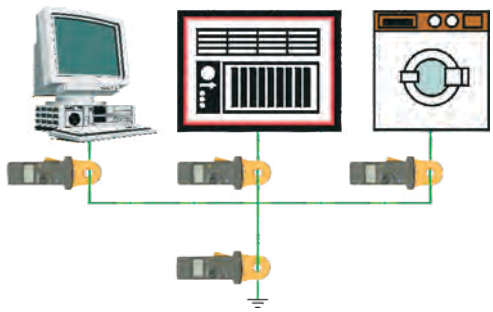

Clamp - On Earth / Ground Resistance & Leakage Current Tester (suitable for 23 / 35mm Conductor)

4680, 4680B

Features

- Non Contact Ground Resistance Measurement
- No Auxiliary Electrodes Needed
- Recording / 116 Sets of Memory
- Ground Resistance Measurment 0.025Ω ~ 1500Ω
- Suitable for Ground Wire upto Φ 23mm (Model 4680)
- Suitable for Ground Wire upto Φ 34.5mm (Model 4680B)
- Leakage Current (0.300mA ~ 30.00A) (Model 4680)
- Leakage Current (0.300mA ~ 35.00A) (Model 4680B)
- Programmable High & Low Alarm
- Programmable Data Logging
- Auto Range
- Continuity Loop Test
- Auto Power Off (4~6 mins.)

General Specifications

Jaw Opening	: 23 mm approx. (Model 4680) 38 mm approx. (Model 4680B)
Battery Type	: 9V (Alkaline)
Display	: 4 Digit 9999 Counts LCD
Range Selection	: Auto
Overload Indication	: OL
Power Consumption	: 40mA (approx.)
Low Battery Indication	: B
Operating Environment	: 0^0 ~ 50 ^{0}C, RH < 85%
Storage Environment	: -20^0C ~ 60 ^{0}C, RH < 75%
Dimensions	: 257 x 100 x 47 mm (Model 4680) 276 x 102 x 51 mm (Model 4680B)
Weight	: 670 gms Including Battery (approx.) (4680)/ 790 gms Including Battery (approx.) (4680B)
Accessories	: Resistance Verification Plate x 1, Battery (installed) x 1, User Manual x 1, Carry Box x 1, Cleaning Brush x 1

Electrical Specifications (23^{0}C ± 5^{0}C)

Ground Resistance (Auto Range)		
Range	**Resolution**	**Accruacy of Reading[1,2]**
0.025 ~ 0.250 Ω	0.002 Ω	± 1.5%rdg ± 0.05Ω
0.251 ~ 1.000 Ω	0.02 Ω	± 1.5%rdg ± 0.05Ω
1.001 ~ 10.00 Ω	0.02 Ω	± 1.5%rdg ± 0.1Ω
10.01 ~ 50.00 Ω	0.04 Ω	± 2.0%rdg ± 0.3Ω
50.01 ~ 100.0 Ω	0.04 Ω	± 2.0%rdg ± 0.5Ω
100.1 ~ 200.0 Ω	0.4 Ω	± 3.0%rdg ± 1.0 Ω
200.1 ~ 400.0 Ω	2 Ω	± 5.0%rdg ± 5 Ω
400.1 ~ 600.0 Ω	5 Ω	± 10%rdg ± 10 Ω
600.1 ~ 1500 Ω	20 Ω	± 20%rdg

1. Loop resistance noninductive, external field <50A/m (4680) or <200A/m (4680B), external electrical field <1V/m, conductor centered.
2. Resistance Measurement Frequency : 3.333KHz

Ground & Leakage Current: Auto Ranging, 50/60Hz, TRMS, Crest Factor <3.0 for (4680) or <3.5 for (4680B)		
Range	**Resolution**	**Accruacy of Reading**
0.300 ~ 1.000 mA	0.001 mA	± 2.0%rdg ± 0.05mA
1.00 ~ 10.00 mA	0.01 mA	± 2.0%rdg ± 0.03mA
10.0 ~ 100.0 mA	0.1 mA	± 2.0%rdg ± 0.3mA
100 ~ 1000 mA	1 mA	± 2.0%rdg ± 3mA
0.200 ~ 4.000A	0.001A	± 2.0%rdg ± 0.03A
4.00 ~ 30.00A (4680)	0.01A	± 3.0%rdg ± 0.03A
4.00 ~ 35.00A (4680B)	0.01A	± 3.0%rdg ± 0.03A

Accuracy of Resistance Calibration Plate : ±1%
Data Logging Capacity : 116 Records
Data Logging Interval : 1 ~ 255 Seconds

LCR Meter

LCR999A

Features

- Basic measurement accuracy 0.1% & speed upto 10 meas / sec.
- Large LCD display with bright white backlight.
- Ultra low power consumption, battery powered for 24 hours of continuous use.
- Automatic identification function (Ai).
- Percentage display & 4 tolerance comparator : 1%, 5%, 10% & 20%
- 9V battery & External power supply
- Automatic correction function with datahold, max. / min. / average recording.
- Utility function configuration & current setup recovery after power off.
- Standard Mini-USB interface, SCPI compatible
- Auto power Off
- Constant output impedance : 100 ohm

Application

- Field maintenance test & external carrying test.
- Fixation point on production line or mobile checkout.
- Warehouse & real time spot or batch inspection.
- Flow inspect and in field measurements.

Specifications

Function		
Measurement Parameter	Primary Parameters : L / C / R / Z	Secondary Parameter : D / Q / θ / ESR
Equivalent Mode	Series, Parallel	
Auto LCR Function	Manual / Auto	
Ranging Mode	Auto	
Test Terminals	2-Terminal, 4-Terminal, 5-Terminal	
Measurement Speed	10 meas/sec (fast), 5 meas/sec (med), 2 meas/sec (slow)	
Correction	Short , Open	
Tolerance Mode	1%, 5%, 10%, 20%	
Input Protection Fuse	0.1A / 63V	
Interface	Mini-USB (Virtual Serial Port)	
Test Signal		
Signal Frequency	100Hz, 120Hz, 1KHz, 10KHz	
Test Signal Level	0.6 Vrms	
Output Impedance	100Ω	
Basic Accuracy	0.1%	
Measuring Range	L	4μH ~ 1000H Range for Display 0.001μH ~ 1000.0H
	C	4pF ~ 20mF Range for Display 0.001pF ~ 20.000mF
	R / Z	0.4Ω ~ 10MΩ Range for Display 0.0001Ω ~ 10.000MΩ
	ESR	Range for Display 0.0000Ω ~ 999.9Ω, Resolution : 0.0001Ω
	D	Range for Display 0.0000 ~ 9.999, Resolution : 0.0001
	Q	Range for Display 0.0000 ~ 9999, Resolution : 0.0001
	θ	Range for Display - 179.9° ~ 179.9°, Resolution : 0.01°
Environment	0°C~40°C, ≤90% RH	
Power Supply		
Battery Model	7.2V Ni-MH 600mAH Rechargable Battery	
AC Adaptor	Input : 220V (1±10%), 50Hz (1±5%) : Output 12V DC	
Charge Time & Current	Continuous Charge Time : Max. 80min.	Charge Current : Max. 150mA
Battery Capcity Indication	Real Time Disaplay on LCD	
General		
Dimensions	193 x 93 x 48mm	
Weight	395gms (approx.)	
Safety and EMC compliance	IEC 61010-1 : 2001, IEC 61326-2-1 : 2005	
Accessories	Manual, Short Circuit Plate x 1, 7.2V Ni MH Rechargeable Battery (installed) x 1, 12V/300mA AC Adapter x 1, 5 Terminal Kelvin Test Leads x 1 **Optional :** SMD 4 Terminal Kelvin Test Tweezers x 1, Banana Plugs-Crocodile Clip Test Leads x 1, Mini USB Communication Cable & S/W CD	

Micro - Ohmmeter (7272) / Milli - Ohmmeter (7002)

SOFTWARE

CE

USB

7002, 7272

Features

- Basic Accuracy 0.25%
- Max. Test Current : 10A (60mΩ) for 7272, 5A (120mΩ) for 7002
- Manual or Auto Range
- Four Terminal Kelvin Measurement
- 6 Ranges with 1μΩ Best Resolution
- Measurement of Resistive and Inductive Materials
- Setting for HI, LO & PASS Readings
- Memory of 3000 Measurements Data
- Programmable HI-LO Alarm with memory of 20 Data
- Large LCD with Backlight & HOLD Function
- Low Power Consumption
- Battery Operated (Rechargeable Battery)
- Low Battery indication
- LED indication for Invalid Resistance Measurement
- Cable Length Measurement in feet & meters
- User Interface Software for PC Communication via RS232C (to USB Bridge) Cable
- Built-in Battery Charging Circuit & Calendar Clock

General Specifications

- Battery Charging Time 10Hrs
- AC Adaptor : Input 110V or 220V AC, Output DC 15V/1~3A
- LCD Display 4 5/6 Digit + Backlight
- Dimension : 260 x 158 x 70mm (approx.)
- Weight : 1125gms Including Battery (approx.)
- Environment : 0°C ~ 50°C ≤ 85% RH (Operation)
  : -20°C ~ 60°C ≤ 75% RH (Storage)

Application



Measurement (with Alligator Clips)



Measurement (with Kelvin Clips)



Measurement (with 4 wire Test Leads)

Accessories

- Users Manual x 1 ● Software Manual x 1 ● Software CD x 1
- RS232C (to USB Bridge) Cable x 1 ● AC Adaptor x 1
- 11.1V Rechargeable Lithium Battery (1600mAh) x 1 for 7002
- 11.1V Rechargeable Lithium Battery (3400mAh) x 1 for 7272
- 1 Set of Kelvin Clips ● Carrying Bag x 1
- **Optional :** 4 Wire Test Leads, Double Prods Alligator Clips

Electrical Specifications (23°C ± 5°C)

Manual Range

	Resistance Range	Resolution	Accuracy
10A (7272)	400μΩ ~ 4000μΩ	1μΩ	±0.25% ±25μΩ
	1.500mΩ ~ 16.000mΩ	1μΩ	±0.25% ±25μΩ
	5.000mΩ ~ 60.000mΩ	1μΩ	±0.25% ±25μΩ
5A (7002)	1.000mΩ ~ 8.000mΩ	1μΩ	±0.25% ±25μΩ
	5.00mΩ ~ 32.00mΩ	10μΩ	±0.25% ±250μΩ
	10.00mΩ ~ 120.00mΩ	10μΩ	±0.25% ±250μΩ
1A	4.00mΩ ~ 40.00mΩ	10μΩ	±0.25% ±250μΩ
	15.00mΩ ~ 160.00mΩ	10μΩ	±0.25% ±250μΩ
	50.00mΩ ~ 600.00mΩ	10μΩ	±0.25% ±250μΩ
100mA	0.0400Ω ~ 0.4000Ω	100μΩ	±0.25% ±2.5mΩ
	0.1500Ω ~ 1.6000Ω	100μΩ	±0.25% ±2.5mΩ
	0.5000Ω ~ 6.0000Ω	100μΩ	±0.25% ±2.5mΩ
10mA	0.400Ω ~ 4.000Ω	1mΩ	±0.25% ±25mΩ
	1.500Ω ~ 16.000Ω	1mΩ	±0.25% ±25mΩ
	5.000Ω ~ 60.000Ω	1mΩ	±0.25% ±25mΩ
1mA	4.00Ω ~ 40.00Ω	10mΩ	±0.25% ±250mΩ
	15.00Ω ~ 160.00 Ω	10mΩ	±0.25% ±250mΩ
	50.00Ω ~ 600.00Ω	10mΩ	±0.25% ±250mΩ
100μA	0.0400kΩ ~ 0.4000kΩ	100mΩ	±0.75% ±3Ω
	0.1500kΩ ~ 1.6000kΩ	100mΩ	±0.75% ±3Ω
	0.5000kΩ ~ 6.0000kΩ	100mΩ	±0.75% ±3Ω

Electrical Specifications (23°C ± 5°C)

Auto Range

	Resistance Range	Resolution	Accuracy
10A (7272)	400μΩ ~ 60.000mΩ	1μΩ	±0.25%±25μΩ
5A (7002)	1.000mΩ ~ 8.000mΩ	1μΩ	±0.25%±25μΩ
	8.00mΩ ~ 120.00mΩ	10μΩ	±0.25%±250μΩ
1A	4.00mΩ ~ 600.00mΩ	10μΩ	±0.25%±250μΩ
100mA	0.0400Ω ~ 6.0000Ω	100μΩ	±0.25%±2.5mΩ
10mA	0.400Ω ~ 60.000Ω	1mΩ	±0.25%±25mΩ
1mA	4.00Ω ~ 600.00Ω	10mΩ	±0.25%±250mΩ
100μA	0.0400kΩ ~ 6.0000kΩ	100mΩ	±0.75%±3Ω

Software

Application program to represent Real Time Values & Facility to open / save recorded data, plot data, export data, print display screen, parameter setting etc. The screen also displays current time, start time, system mode, sample rate, high limit, low limit, sample count & present sample value. The program also supports plotting of present or recorded data.

Transformer Turns Ratio Meter

TTR 8100

Transformer is a very important element in the Electric Power Distribution System. It needs to be maintained from time to time to guarantee smooth power supply at consumer end.

MECO TTR8100 is portable instrument for accurate measurement of 1-Phase & 3-Phase Transformer VT / CT Turns Ratio, Excitation Voltage, Current, Phase Angle and Deviation. TTR8100 ensures the Correct Turn Ratio and Quality of the Transformer.

It checks live Test Points, Short Circuit, Open Circuit and Reverse Polarity before each measurement.

Features

- Measurements of 1Φ and 3Φ Transformer / VT / CT Turns Ratio
- VT/PT Ratio 0.8~10000, CT Ratio 0.8~2000
- Graphical and Literal Illustration of Measurements and connections with Large Back-lighted Dot Matrix 240x128 LCD
- Displays Turns Ratio, Deviation, Secondary Output, Excitation Voltage and Current, Phase Angle and Nameplate Transformer / VT / CT Values in one page for easy quality interpretation.
- Check for Live Test Points, Short Circuit, Open Circuit and Reverse Polarity before each measurement.
- Store 4096 Files of Transformer Nameplate Values (VT / PT / CT, 1Φ / 3Φ, Test Frequency, Primary and Secondary Voltages or Ratio, RCF) and Measuring Data.
- Ten test Frequencies (50~400Hz)
- 9 Types of 3Φ Winding Connections pre-installed.
- Wireless Blue Tooth Communication with PC.
- Select Filter to Remove Field noise (Slow, Normal, Fast)
- Record with Date and Time Stamp
- Powerful lithium Battery (3400mAH) with built-in Charging Circuit
- User Programmable RCF (Reference Correction Factor, 0.99~1.01) to Correct Accuracy within 1% Error
- PC Application Software Included
- Friendly File System for Easy On-site Data Retrieval and Nameplate Values Management

Reference Conditions : 23°C±5°C (30 to 50% RH). Add 25ppm / °C for -0° to 18°C and 28° to 50°C to all Accuracy Specifications. No external electrical or magnetic fields. Output current ≤ 150mA for VT / PT and ≤ 50mA for CT. Calibration Cycle is 1 Year.

Electrical

Ratio Range (VT / PT)	**Autoranging : 0.8000 to 10000:1**	
Accuracy (70Hz)	**Ratio Range**	**Accuracy (%of Reading)**
	0.8000 to 999.99	±0.1%
	1000.0 to 4999.9	±0.2%
	5000.0 to 10000	±0.25%
Ratio Range (CT)	**Autoranging : 0.8000 to 2000.0**	
Accuracy (70Hz)	**Ratio Range**	**Accuracy (%of Reading)**
	0.8000 to 2000.0	±0.5%
Excitation Signal	VT / PT Mode : 34Vrms max CT Mode : Auto Level 0 to 1A, 0.1 to 20Vrms	
Excitation Current Display	Range : 0 to 1000mA Accuracy : ±(2% of Reading +2mA)	
Excitation Frequency (Hz)	50, 55, 60, 70, 100, 120, 200, 240, 300, 400	
Display	5" Large Dot Matrix LCD Display (240x128) with Backlight	
Power Source	Rechargeable Lithium Battery, 3400mAh	
Battery Life	Over 10Hrs of Continuous Operation. Battery life (%) Indication	
Battery Charger	Universal Input (90 to 264Vrms Input)	
Charging Time	<4Hrs	
Data Storage	4096 Files Each (VTM, CTM, VTR, CTR, BMP)	
Date/Time	Battery-Backed, Real-time Calendar Clock	
Measurement Method	ANSI/IEEE C57.12.90 and IEC 600076.1	
Accessory	Test Leads x 1 Pair, Alligator Clips x 4, Rechargeable Lithium Battery x 1, Instruction Manual x 1, AC Adaptor x 1, Power Cord x 1, Software CD and Manual x 1, Carrying Bag x 1	

Application

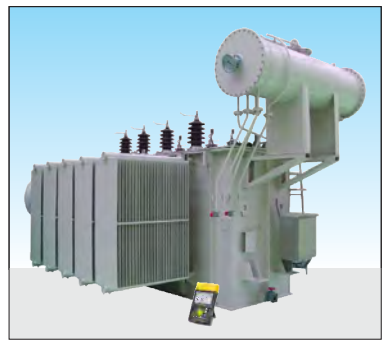

Accessories

CREDA
CHHATTISGARH STATE RENEWABLE ENERGY DEVELOPMENT AGENCY
(Dept. of Energy, Govt. of Chhattisgarh)
2nd Floor, CSERC Building, Shanti Nagar, RAIPUR (C.G.)
Tel.: +91-771-4019230, 4019231, 4019227, 4019228, **Fax:** 0771-4268389
E-mail: info@creda.in **Website:** www.creda.in

CREDA/EC/F-8D/SJ/14624

Raipur, Date: 30 DEC 2015

TO WHOMESOEVER IT MAY CONCERN

It gives us immense pleasure & satisfaction to put on record our appreciation for M/s. Meco Meters Pvt. Ltd., Navi Mumbai from whom we had purchased "Battery Capacity Tester" model No.-6363.

The performance of the instrument found to be satisfactory & excellent during the field inspection & testing of lead acid battery of the solar photovoltaic plant.

We also express our appreciation to the team of M/s. Meco Meters Pvt. Ltd. for their excellent service support to CREDA.

I find the "Battery Capacity Tester" is very effective as well as essential electrical measuring instrument for testing & inspection of battery in solar photovoltaic plant.

Date: 30.12.2015
Place: Raipur

(Sanjeev Jain)
Chief Engineer, CREDA

CREDA - Energetic agency with ever lasting energy sources

MECO®

SINCE 1962

• Automotive Meters
• Battery Capacity Testers

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Battery (Load) Meter

ABM18

BM63

Introduction

A battery is an electrochemical cell that is charged externally to store electrical power. The stored power of the battery is released when it is needed for various applications that could be required for normal day to day working, back-up operations, critical applications or for emergencies. The use of batteries is increasing every day in order to drive / support various applications such as Cars, Motor Cycles, UPS, Generators, Automobiles, Emergency Lights, Solar Power etc.

A battery is expected to always perform flawlessly as per its capacity. However sometimes even new batteries fail and hence periodic testing and maintenance of batteries is required. It is important to also test incoming batteries as a part of the quality control procedure to ensure proper compliance of the supply made by the battery manufacturer. The loss of battery capacity occurs gradually often without the knowledge of the user.

The function of the Battery Meters MECO ABM18 and BM63 is to check the capacity condition of various lead acid storage batteries and to ensure that the supported equipment is adequately backed-up, prevented from unexpected failures and forewarned for any calamity. The battery tester helps to identify the weak batteries so that they can be re-charged or weeded out of the system before they make the complete system unreliable.

ABM18

MECO ABM18 is a portable Automobile Battery (Load) Meter which can check the capacity condition of different types of Motorcycle and Motorcar batteries from 2 to 200Ah.

The product consists of a Load Resistor and Testing Clip. The state of the battery is indicated on the meter dial as 'FULLUP' (White), 'NORMAL' (Green), 'RECHARGE' (Yellow), 'DISCHARGE' (Red) directly.

Technical Specifications

Rated Voltage of Battery to be Tested : 2, 6, 12V DC
Rated Capacity of Battery to be Tested : 2 ~ 200Ah
Dimensions : 225 x 124 x 68mm (approx.)
Weight : 500gms (approx.)

Application

MOTORCYCLE	CAPACITY	VOLTAGE
50cc	2Ah	6V or 12V
51 ~ 125cc	6 ~ 10Ah	
126 ~ 250cc	9 ~ 15Ah	
251 ~ 750cc	10 ~ 18Ah	

MOTORCAR	CAPACITY	VOLTAGE
20 ~ 360cc	20 ~ 24Ah	6V or 12V
500 ~ 2000cc	30 ~ 60Ah	
2000 ~ 5000cc	55 ~ 100Ah	
5000 ~ 8000cc	100 ~ 200Ah	12V or 12V x 2

BM63

MECO BM63 is a portable Battery (Load) Meter which can check the capacity condition of different types of batteries from 4 to 500Ah.

The product consists of a DC Voltmeter, Load Resistor and Testing Clip. The state of the battery is indicated on the meter dial as 'OK' (Green), 'WEAK' (Yellow) and 'BAD' (Red) directly.

Technical Specifications

DC Voltmeter : 0 ~ 15V DC
Rated Voltage of Battery to be Tested : 2, 6, 12V DC
Rated Capacity of Battery to be Tested : 4 ~ 500Ah
Dimensions : 220 x 120 x 70mm (approx.)
Weight : 550gms (approx.)

Digital Battery (Load) Meter
Vehicle Battery System Meter

CE

DBM72

VBSM6129B

LCD Screen

Features

- 80A Discharge Current Load Test for 6V / 12V (40Ah ~ 200Ah) Lead Acid and Li-ion Battery
- Built-In 10 Seconds Timer to Auto Cut-off Load After Test
- Temperature Rise is Controlled (for Circuit Protection)
- Two Way Internal Resistance Measurement (Load Test Method & 4-Wires Method)
- Auto Data Hold

Specifications	Range
Battery Type	Lead Acid & Li-ion Battery
Battery Voltage	6V / 12V DC
Battery Capacity	40 Ah ~ 200Ah
Battery Load Test Current	80A
Load Test Time Control Timer	<10 Seconds
Battery Drop Voltage in Load Test	✓
Temperature Control in Load Test	✓
Battery Internal Resistance by Load Test	0 ~ 99mΩ
Battery Internal Resistance by 4 - Wires Test	0 ~ 99mΩ
Battery Conclusion by Load Test or by 4 - Wires Test	GOOD / WEAK / BAD
Reverse Polarity Protection	✓
Detects and Display Bad Cell	✓
Missing Lead Detection	✓
Overload Protection of Input Voltage	✓
Safety Standard	CAT III 600V
Cable Length	300mm (approx.)
Dimension	205 x 115 x 70mm (approx.)
Weight	900g (approx.)

Features

- Key Parameters Measured for Diagnosis of Vehicle Battery & Electrical System
- LED Indication of Battery Condition : GOOD (Green), WEAK (Yellow) & BAD (Red)
- Overload Protection to ensure Operator Safety
- Loose Lead Detection ● Reverse Polarity Protection
- Internal Unit Conversion CCA / IEC / EN / DIN

Specifications	Range
Battery Test	✓
Engine Activation Load Test	✓
Charging System Test	✓
CCA Range	100 ~ 1700
IEC Range	100 ~ 1000
EN Range	100 ~ 1700
DIN Range	100 ~ 1000
JIS Range	Refer Table in Instruction Manual
Displays Battery Internal Resistance	Ohms
Displays Battery Voltage	Volts
Displays Battery Condition	Display Symbol
Indication of Battery Condition	✓
Test 12V Batteries	✓
Display Battery Status of Health (SOH)	✓
Battery Recharge Indication	✓
Reverse Polarity Protection	✓
Detects and Display Bad Cell	✓
Loose Lead Detection	✓
Internal Unit Conversion EN, IEC, DIN	✓
Overload Protection of Input Voltage	✓
Safety Standard	CAT III 600V
Cable Length	850mm (approx.)
Weight	300g (approx.)

Vehicle Battery System Meter
Vehicle Battery System Meter with Printer

CE

LCD Screen



VBSM6246

VBSM6246P

Features

- Key Parameters Measured for Diagnosis of Vehicle Battery & Electrical System
- Display of Battery Condition [Good / OK / Pay Attention / Replace]
- Overload Protection to ensure Operator Safety
- Loose Lead Detection ● Reverse Polarity Protection
- Internal Unit Conversion CCA / IEC / EN / DIN
- Battery Recharge Indicator, Detects and Displays Bad Cell, Overload Protection of Input Voltage

Specifications	Range
CCA Range	100 ~1700
IEC Range	100 ~1000
EN Range	100 ~1700
DIN Range	100 ~1000
JIS Range	Refer Table in Instruction Manual
Displays Battery Internal Resistance	Display Ohms
Displays Battery Voltage	Display Volts
Displays Battery Condition	Good / OK / Pay Attention / Replace
Test 12V/24V Batteries	✓
Safety Standard	CAT III 600V
Cable Length	700mm (approx.)
Dimension	180 x 90 x 32mm (approx.)
Weight	400g (approx.)

Charging System Test

Engine Activation Load Test

Maximum Load Test



Battery Status Test

Specifications	Range
Battery Test	✓
Engine Activation Load Test	✓
Maximum Load Test	✓
Charging System Test	✓
CCA Range	100 ~ 1700
IEC Range	100 ~ 1000
EN Range	100 ~ 1700
DIN Range	100 ~ 1000
Displays Battery Internal Resistance	Ohms
Displays Battery Voltage	Volts
Displays Battery Condition	Good / OK / Pay Attention / Replace
Thermal Printer	✓
Test 12V / 24V Batteries	✓
Battery Recharge Indication	✓
Reverse Polarity Protection	✓
Detects and Display Bad Cell	✓
Loose Lead Detection	✓
Internal Unit Conversion EN, IEC, DIN	✓
Overload Protection of Input Voltage	✓
LCD with Backlight	✓
Safety Standard	CAT III 600V
Cable Length	700mm (approx.)
Dimension	235 x 90 x 50mm (approx.)
Weight	450g (approx.)

Multifunction Automotive Meter
Digital Automotive Multimeter

User Changable Pinpoint or Hook Test Leads

LCD Screen

MAM6138

Features

- 3 in 1 Automotive Auto Ranging DMM, Power Probe & Logic Probe
- Pen Type Design Perfect for Automotive Diagnosis
- Hands - Free Test Leads for Excellent Convenience
- Flashlight for Operation of Automotive Diagnosis
- Auto Range, Auto Power Off, Low Battery Warning & Data Hold

Specification	Range	Accuracy
VDC	200mV / 2V / 20V / 200V / 600V	± (0.5% + 5)
VAC	2V / 20V / 200V / 600V	± (1.2% + 5)
Resistance	200 / 2000 / 20K / 200K / 2M / 20MΩ	± (0.8% + 5)
Continuity Buzzer & Diode	✓	NA
Logic Test	6V / 12V / 24V	
Test Lighter (Bulb Style Circuit Tester)	**12V / 24V**	
Flash Light, Data Hold, Auto Power Off	✓	
Auto & Manual Range, Low Battery Warning	✓	
Power Source	1.5V AA x 2	
Max. Display	1999	
Dimension	210 x 60 x 32mm (approx.)	
Weight	240g (approx.)	

DMM Mode

Logic Probe Mode

Test Light Mode

Flash Light

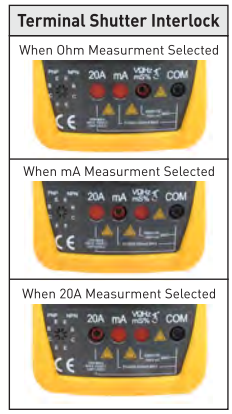

6255

Features

- Terminal Shutter Interlock Mechanism Prevents Wrong Opertions
- 11 Functions
- Heavy Duty Rubber Holster
- Data Hold, Auto Power Off
- Measurement of Duty, Ignition Frequency, Ms-Pulse Width, RPM & DWELL

Specifications	Range	Accuracy
Ignition Frequency	0.1Hz ~ 20KHz	± (1.5% + 10)
Pulse Width	0.1 ~ 999.9ms	± (1.5% + 10)
RPM	2STR : 300 ~ 19999 rpm	± (3% + 5)
	4STR : 600 ~ 19999 rpm	
DC V	20V / 200V	± (0.5% + 3)
	1000V	± (0.8% + 3)
AC V	20V / 200V	± (1% + 5)
	700V	± (1.2% + 5)
DC A	20mA / 200mA	± (1.5% + 5)
	20A	± (2% + 10)
AC A	20mA / 200mA	± (2% + 5)
	20A	± (3% + 10)
Resistance	200Ω	± (1% + 5)
	2K / 20K / 200K / 2M	± (1% + 1)
Frequency	2KHz / 20KHz	± (1.5% + 10)
Temperature	-40 ~ 0°C	± (5% + 5)
	0 ~ 400°C	± (1% + 3)
	400 ~1000°C	± (2% + 3)
DUTY	0.1% ~ 99.9%	NA
DWELL	1 / 2 / 3 / 4 / 5 / 6 / 8	± (3% + 5)
Continuity Buzzer	✓	NA
Diode Test	✓	
Transistor Test	✓	
Power Source	9V Battery	
Dimension	200 x 85 x 38 mm (approx.)	
Weight	800g (approx.)	

Battery Internal Resistance (Impedence) - Introduction

What is Internal Resistance of Battery?

One of the basic requirements of a battery for digital applications is low internal resistance. Measured in milliohms, the internal resistance is the gatekeeper that, to a large extent, determines the runtime. The lower the resistance, the less restriction the battery encounters in delivering the needed power. The internal resistance (IR) of a battery is defined as the opposition to the flow of current within the battery. There are two basic components that impact the internal resistance of a battery; they are electronic resistance and ionic resistance. The electronic resistance plus the ionic resistance will be referred to as the total effective resistance.

How does Internal Resistance affect Performance?

Storage batteries are repeatedly charged and discharged over a long interval. This tends to gradually deteriorate the battery performance and the internal resistance increases until charging is no longer possible. Faults may also be caused by internal short-circuits, reducing the battery voltage, making the battery over-heat or in the case of a short-circuit caused by corrosion, possibly even leading to a fire.

A high mW reading can trigger an early 'low battery' indication on a seemingly good battery because the available energy cannot be delivered in the required demand and remains inside the battery.

The internal resistance of a battery is dependent on the specific battery's size, chemical properties, age, temperature and the discharge current.

Effects of internal battery resistance
A battery with low internal resistance delivers current to the equipment (Load) as per requirement. High internal resistance causes battery voltage to drop. Because of drop in voltage, current flowing to the equipment (Load) gets cut-off leaving energy in the battery.

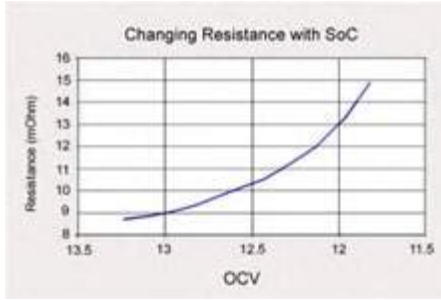

Typical internal resistance readings of a lead acid battery
The readings were taken at open circuit voltage (OCV).

MECO Battery Capacity Tester

In the modern age with the increase in various portable devices, maintenance of batteries has become crucial as the performance of these devices depend on life of batteries. Because of continues charging and discharging of batteries their performance gradually deteriorates until charging is no longer possible which may result in sudden failure of the system.

MECO Batter Capacity Testers can give quick results on the state of a battery either as PASS, WARNING or FAIL which is based on comparator settings of internal resistance and the voltage for various batteries. MECO Battery Capacity Testers can check all types of batteries including Nickel-Metal Hydride batteries (NiMH), Nickel Cadmium batteries (NiCd), Lithium-Ion batteries (Li-ion), Alkaline batteries and Lead-Acid batteries. Users can choose from 2 models to suit their applications : Battery Capacity Tester Model 6363 for testing batteries upto 40V and 500Ah and Battery Capacity Tester Model 6390 for testing batteries upto 60V and 1200Ah.

The analysis of batteries state is PASS / WARNING / FAIL based on a six-way combination of comparisons against upper and lower limits of Internal Resistance and Voltage threshold. This result is then indicated by LEDs and a Beeper.

Comparator Table

Resistance / Voltage	Low Limit Resistance		High Limit Resistance
	Lo ↓	Middle ↓	Hi
Voltage ..... Lo	WARNING Beeper	WARNING Beeper	FAIL Beeper
Comparison → / **Value .....Hi**	PASS	WARNING Beeper	FAIL Beeper

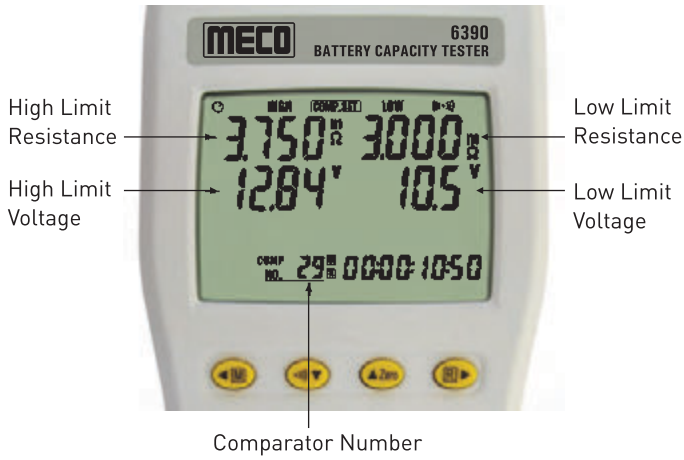

Applications (For 6363 & 6390)

For Manufacturers, R & D Units, Service Centers, Technicians, Dealers & Service Excutives in following industries

- Battery
- UPS
- Automobile
- Emergency Power Backup
- Solar Energy
- Wind Energy
- Lift
- Crane & forklift
- IT
- Telecom
- Aircraft
- Railways

Battery Capacity (Impedence) Tester for Batteries upto 500Ah

SOFTWARE

CE

USB

Product Kit

6363

Top Connections

Software Window

Features

- Memory & Read Function
- Right Device to know the TRUE-LIFE of Battery Capacity (Resistance / Voltage) Simultaneously Measure
- On-line Testing without shutting down battery
- Built-in Comparator Function
- Rates Conditions as PASS, WARNING or FAIL
- Datalogging Memory Function
- Compact and Lightweight
- USB Interface & Software
- Auto Power Off

Specifications

Battery Types Tested	**UPS Battery, Motor Cycle** (6V/12V : 2 ~ 20Ah), **Car** (12V : 21 ~ 80Ah), **Truck** (12V : 83 ~ 160Ah) **Household Appliances** [(9V : upto 625mAh), (AA : upto 2850mAh), (AAA : upto 1250mAh), (C : upto 8350mAh), (D : upto 20500mAh)], **Lithium Notebook Battery** [(14.8V : 3600 ~ 4800mAh), (11.1V : 3600 ~ 7200mAh)], **Lithium Digital Camera Battery** (3.7V : 650 ~ 1350mAh), **Lithium Cordless Phone Battery** (3.7V : 800 ~ 1250mAh),
Battery Capacity	0 to 500Ah
Resistance	**Ranges :** 40mΩ, 400mΩ, 4Ω, 40Ω **Resolution :** 10μΩ, 100μΩ, 1mΩ, 10mΩ **Accuracy :** ± (1% rdg + 10 dgt) on all Ranges
Measurement Condition	**Current :** 25mA, 2.5mA, 250μA, 25μA **Frequency :** 1KHz ± 10%
Voltage	**Measurement :** 4V, 40V **Resolution :** 1mV, 10mV **Accuracy :** ± (0.1% rdg + 6 dgt)
Open Circuit Terminal Voltage	≤ $3.5V_{PP}$
Manual Data Logging	500 Sets
Continuous Data Logging	9600 Sets
Comparator Settings	Resistance High and Low Limits and Voltage Throughold Point
Number of Comparator Settings	99 Sets
Operating Environment	0°C to 40°C (32°F to 104°F), 80% RH or Less, Non-Condensing
Maximum Input Voltage	50V DC
Power Supply	Six 1.5V AA Size Batteries
Battery Life	7 Hours
Dimensions / Weight	250 x 100 x 45 mm (approx.) / 490gms Including Batteries (approx.)
Accessories	Instruction Manual x 1, Batteries (installed), Test Probe (Alligator Clips) x 1, USB Cable x 1, Software Disk x 1, Carrying Bag x 1

Battery Capacity (Impedence) Tester with DC Current Adaptor for Batteries upto 1200Ah

DC Current Adaptor

6390



Software Window



Features

- Right Device to know the TRUE-LIFE of Battery Capacity (Resistance / Voltage / Current & Temperature) Simultaneously
- Measure battery charge / discharge capacity (Ah)
- Measure battery State of Charge SOC (%)
- On-line Testing without shutting down battery
- Built-in Comparator Function
- Rates Conditions as PASS, WARNING or FAIL
- Auto Datalogging Micro SD Card 4GB upto 99 blocks
- Compact and lightweight
- USB Interface & Software
- Load Test Analysis (Charge / Discharge)
- Auto-Hold & Auto-Data Storage
- Wide Range 0 ~1200 Ah
- Auto Power Off
- Memory & Read Function

Specifications

Battery Types Tested	**UPS Battery, Motor Cycle** (6V/12V : 2 ~ 20Ah), **Car** (12V : 21 ~ 80Ah), **Truck** (12V : 83 ~ 160Ah) **Household Appliances** [(9V : upto 625mAh), (AA : upto 2850mAh), (AAA : upto 1250mAh), (C : upto 8350mAh), (D : upto 20500mAh)], **Lithium Notebook Battery :** [(14.8V : 3600 ~ 4800mAh), (11.1V : 3600 ~ 7200mAh)], **Lithium Digital Camera Battery :** (3.7V : 650 ~ 1350mAh), **Lithium Cordless Phone Battery :** (3.7V : 800 ~ 1250mAh),
Battery Capacity	0 to 1200Ah
Resistance	**Ranges :** 4mΩ, 40mΩ, 400mΩ, 4Ω, 40Ω, 400Ω **Resolution :** 1μΩ, 10μΩ, 100μΩ, 1mΩ, 10mΩ, 100mΩ **Accuracy :** ± (0.8% rdg + 6 dgt) on all ranges. except ± (3% rdg + 20 dgt) on 4mΩ
Measurement Condition	**Current :** Approx. 40mA, 4mA, 400μA, 40μA, 4μA **Frequency :** 1KHz ± 30Hz
DC Voltage	**Range :** 6V, 60V; **Resolution :** 1mV, 10mV; **Accuracy :** ±(0.1% rdg + 6 dgt)
Temperature	**Range :** -20°C to 60°C (-4°F to 140°F); **Resolution :** 0.1°C / 0.1°F; **Accuracy :** ± 1°C / ± 1.8°F
DC Current	**Range :** 600A; **Resolution :** 0.1A; **Accuracy :** ± (2% rdg + 2 dgt)
Open Circuit Voltage	5V max
Datalogging	**Manual Datalogging :** 999 Sets (Can be read by Meter & Download by PC) **Auto Datalogging :** Micro SD card 4GB (Max. 99 Blocks)
Comparator	**Setting :** Resistance Upper and Lower Limits and Voltage (Threshold) Upper and Lower Limit **Memory :** 99 Sets of Values
Operating Environment	0°C to 40°C (32°F to 104°F), 80% RH or less, Non-condensing
Power Supply	Six 1.5V AA size Alkaline Batteries
Battery life	5.5 Hours
Standard	IEC 61010-1, 1000V Insulation CAT III, Pollution Degree 2
Dimensions / Weight	198 x 94 x 49 mm (approx.) / 530 gms Including Battery (approx.)
Accessories	Alligator Clip Type Test Lead with Temperature Sensor x1, Pin Type Test Lead x 1, DC Current Adaptor x 1, Zero Adjustment Board x 1, Instruction Manual x 1, AA 1.5V Batteries x 6, AC Adaptor x 1, 4GB Micro SD Card (installed) x 1, USB Cable x 1, PC Software Disk x 1 & Carring Bag x 1

Battery Capacity (Impedence) Tester with DC Current Adaptor for Batteries upto 1200Ah

Resistance Measurement

Range	Resolution	Measurement Current	Accuracy
4mΩ	1μΩ	40mA approx.	± (3% rdg ± 20 dgt)
40mΩ	10μΩ	40mA approx.	± (0.8% rdg ± 6 dgt)
400mΩ	100μΩ	4mA approx.	
4Ω	1mΩ	400μA approx.	
40Ω	10mΩ	40μA approx.	
400Ω	100mΩ	4μA approx.	

Measuring Current Frequency : 1KHz ± 30Hz

Voltage Measurement

Range	Resolution	Accuracy
6V	1mV	± (0.1% rdg ± 6 dgt)
60V	10mV	

Maximum Input Voltage : 60VDC maximum. No AC Voltage Input.

Temperature Measurement

Range	Resolution	Accuracy
-20°C to 60°C	0.1°C	± 1.0°C
-4°F to 140°F	0.1°F	± 1.8°F

DC Current Measurement

Range	Sensitivity	Resolution	Accuracy
600A	0.6A ~ 600.0A	0.1A	± (2.0% rdg ± 2 dgts)

Zero Adjustment Using Pin Type Test Lead

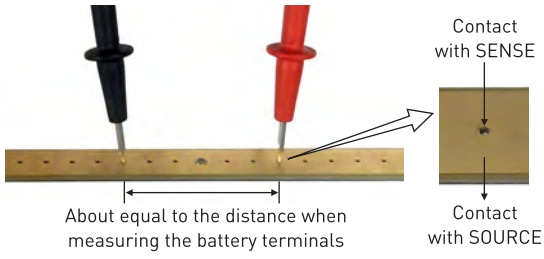

Input Terminals

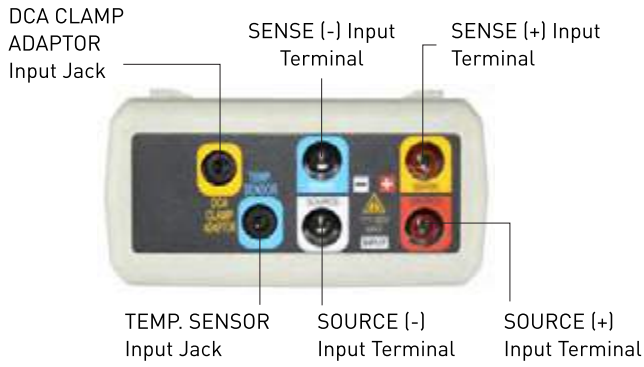

Usage

Zero Adjustment Using Clip Type Test Lead

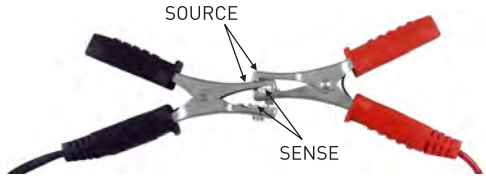

Product Kit

Customer Approvals / Appreciation

CREDA
CHHATTISGARH STATE RENEWABLE ENERGY DEVELOPMENT AGENCY
(Dept. of Energy, Govt. of Chhattisgarh)
2nd Floor, CSERC Building, Shanti Nagar, RAIPUR (C.G.)
Tel.: +91-771-4019230, 4019231, 4019227, 4019228, Fax: 0771-4268389
E-mail: info@creda.in Website: www.creda.in

CREDA/EC/F-8D/SI/14624

Raipur, Date: 30 DEC 2015

TO WHOMESOEVER IT MAY CONCERN

It gives us immense pleasure & satisfaction to put on record our appreciation for M/s. Meco Meters Pvt. Ltd., Navi Mumbai from whom we had purchased "Battery Capacity Tester" model No.-6363.

The performance of the instrument found to be satisfactory & excellent during the field inspection & testing of lead acid battery of the solar photovoltaic plant.

We also express our appreciation to the team of M/s. Meco Meters Pvt. Ltd. for their excellent service support to CREDA.

I find the "Battery Capacity Tester" is very effective as well as essential electrical measuring instrument for testing & inspection of battery in solar photovoltaic plant.

Date: 30.12.2015
Place: Raipur

(Sanjeev Jain)
Chief Engineer, CREDA

CREDA - Energetic agency with ever lasting energy source

1st Floor Energy Building
Pandit Deendayal Petroleum University Campus
Gandhinagar, Gujarat - 382 007, INDIA
Phone : +91-79-2327 5361
Fax : +91-79-2327 5380
Email : information@germi.org
Website : www.germi.org

GERMI
GUJARAT ENERGY RESEARCH AND MANAGEMENT INSTITUTE

ENERGY EDUCATION
ENERGY RESEARCH & DEVELOPMENT
ENERGY AWARENES & PUBLICATION
ENERGY CONSULTANCY

Dr. Omkar Jani
Principal Research Scientist, Solar Energy Research Wing
GERMI Research, Innovation and Incubation Centre

GERMI/Solar/2016/554
4 January 2016

TO WHOMSOEVER IT MAY CONCERN

This is to certify that **"SOLIR SYSTEM !N!LYZER MODEL: 9018 BT"** , which is procured vide our Purchase Order number GERMI/SRWTRG/2015/021 dated 24.11.2015 from **M/s. Meco Meters Private Limited,** Mahape, Navi Mumbai for Gujarat Energy Research and Management Institute, Gandhinagar, Gujarat, is for our internal use, training and research purpose.

Sincerely yours,

Omkar Jani

भारत सरकार
अन्तरिक्ष विभाग
इसरो उपग्रह केन्द्र
पोस्ट बॉक्स नं. 1795, हवाई अड्डा मार्ग
विमानपुरा डाक घर, बेंगलूरु - 560 017. भारत
दूरभाष :
फैक्स :

सत्यमेव जयते

Government of India
Department of Space
ISRO Satellite Centre
Post Box. No. 1795, Airport Road, Vimanapura Post
Bangalore - 560 017. India
Telephone
Fax :
25084024
25205283/84

ISCP-2012-0-24809-0101 LO

17/07/2013

WHOM SO EVER IT MAY CONCERN

This is to certify that **"SOLAR MODULE ANALYSER" (SMA) LOW POWER SMA AND HIGH POWER SMA** which is procured vide our Purchase Order No. ISCP-2012-0-24809-0101 LO Dated.17.06.2013 from **M/s. MECO METERS PVT LTD., MAHAPE** for ISRO Satellite Centre, Bangalore, is for our own use. There will not be any commercial transactions involved or re-sale of these items.

These materials are being transported through carriers.

It is requested not to detain enroute, as the item is required very urgently at the destination.

V.SARAVANAN
Purchase & Stores Officer

इसरो ISRO

भारतीय अन्तरिक्ष अनुसंधान संगठन

Indian Space Research Organisation

SOLAR IDEA

T +91 - 40 - 4946 4332 (IDEA)
F +91 - 40 - 4946 4333
Toll Free 1-800-102-4332 (IDEA)
info@solaridea.com
www.solaridea.com

4th January, 2016

To,
M/s. MECO Meters Pvt. Ltd.
Plot No. EL – 60, MIDC , Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai – 400710 (India)
Tel. No. 022 – 27673300
Fax No. 022 – 27673310

Kind Attention: Mr. Kamal Goliya / Mr. Prashant Thakkar

Subject: Performance of MECO Solar System Analyzer – 9018BT

Dear Sir,

We are pleased to inform you that performance of MECO Solar System Analyzer 9018BT supplied to us is working well and is meeting our expectations.

We are using the MECO Solar System Analyzer for analyzing and improving the efficiency of our Solar Inverters, Solar pumps, and other solar systems. We are also able to assess the PV panel performance and furthermore, we are able to adjust the panels spacing and tilt angel to obtain optimum power from the PV panels.

The analyzer is found to be reliable and we have pleasure in recommending the same to others.

We look forward to having similar kind of service and support from you in the future.

With Best Regards
For M/s. Solar Idea Pvt. Ltd.

Managing Director

SOLAR IDEA PRIVATE LIMITED Hyderabad

SOLAR IDEA PRIVATE LIMITED, CIN : U40106TG2014PTC094915
Registered Office : Door No. 8-2-277/A/7, Plot No. 126, Road No. 2, Banjara Hills, Hyderabad -500034, Telangana State, India.

MECO®

SINCE 1962

Solar Analyzers

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Solar Module Analyzer (Photovoltaic I-V Curve Tester)

SOFTWARE

CE

USB

IV-Curve

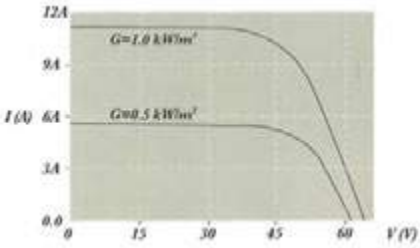

9009

Solar Cell



Solar Panels

MECO Solar Module Analyzer Model 9009 is a portable analyzer used for testing, maintenance and finding efficiency of various parameters of solar panels and cells. Analyzer can be used to design Solar System to generate specific power. It can identify Solar Power System requirement, best angle of Solar Panel installation and Broken / Worn-out cells

Features

- I-V Curve Test for Solar Panel / Module / Cell
- Max. Solar Panel / Module / Cell Power (Pmax) search by Auto-Scan : 60V, 12A (500W Capability)
- Best Resolution : 1mV, 1mA
- Manual Single Point I-V Test
- Max. Voltage (Vmaxp) at Pmax
- Max. Current (Imaxp) at Pmax
- Voltage at Open Circuit (Vopen)
- Current at Short Circuit (Ishort)
- I-V Curve with Cursor to Display each Data Point
- Efficiency (%) Calculation of Solar Panel
- Solar Panel Area Setting : 0.001 m^2 ~ 9999 m^2
- Standard Light Source Setting : 10 W/m^2 ~ 1000 W/m^2
- Communicate with PC via USB Cable
- AC Adaptor and Rechargeable Lithium Battery
- Memory Size : 100 Records
- Sampling Time of Data Logging : 0 ~ 99 min.
- Large LCD with Backlight

IV-Curve

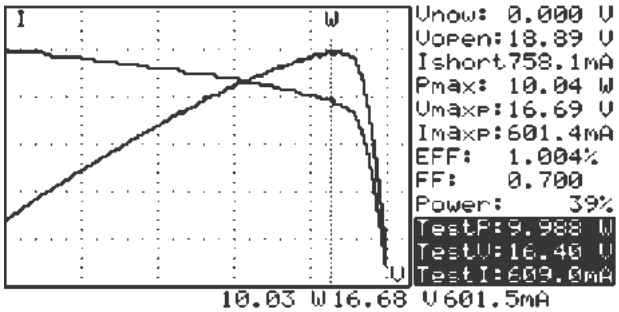

General Specifications

Battery Type	Rechargeable Lithium Battery, 3400mAh
Battery Life	400 times of linear scan from 60V to 0V and 0A to 12A.
Data Logging Memory Size	100 records
AC Adaptor	AC 110 ~ 240V Input, DC 15V / 1 ~ 3A Output
Standards	EN 61326 - 1:2006 EN 61010 - 1:2001 CAT I 60V Pollution Degree 2
Operation Environment	5°C ~ 50°C, <85% RH
Temperature Coefficient	0.1% of full scale / °C(<18°C or >28°C)
Storage Environment	-20°C ~ 60°C, <75% RH
Dimension	257 x 155 x 57mm (approx.)
Weight	1160gms Including Battery (approx.)
Accessories	User Manual x 1, AC Adaptor x 1, Optical USB Cable x 1, Rechargeable Lithium Battery (installed) x 1, Software CD x 1, Software Manual x 1, Kelvin Clips (12A max) x 1 Set, 4 Wire to 2 Wire Connector (10A Max and 12A for 1minute) x 1 set, Carrying Bag x 1

Electrical Specifications (23°C ± 5°C, Four-Wire Measurement Maximum Power Limit is 500W)

Solar Module Analyzer (Photovoltaic I-V Curve Tester)

DC Voltage Measurement

Range	Resolution	Accuracy
0 ~ 10V	0.001V	± 1% ± (1% of Vopen ± 0.1V)
10 ~ 60V	0.01V	± 1% ± (1% of Vopen ± 0.1V)

Vopen : Open Circuit Voltage of Solar Cell or Module

DC Current Measurement

Range	Resolution	Accuracy
0.01 ~ 10A	1mA	± 1% ± (1% of Ishort ± 9mA)
10 ~ 12A	10mA	± 1% ± (1% of Ishort ± 0.09A)

Ishort : Short Circuit Current of Solar Cell or Module

DC Current Simulation

Range	Resolution	Accuracy
0.01 ~ 10A	1mA	± 1% ± 9mA
10 ~ 12A	10mA	± 1% ± 0.09A

Rear Panel Connections

Applications

- Quality Control at Production Line, Warehouse or Site of Installation
- Identify Requirements of Solar Power System
- Maintenance of Solar Panels
- Verify the Best Installation Angles of Solar Panels
- Research and Development

User Interface & Data Acquisition Software

Solar Module Analyzer is supplied with user friendly software for Data Storing and Analysis. Users can store Data (.CSV/.TAB) that can be read in MS EXCEL and Print Waveform / Graph via Printer

Software Window

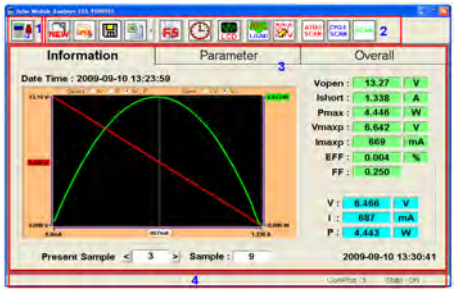

Cycle Scan



Print LCD

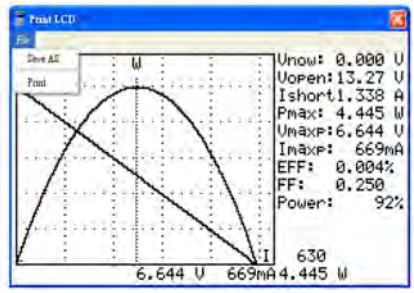

Product Kit

4 Wire Measurement

Solar Panel Connections

Solar System Analyzer (Photovoltaic I-V Curve Tester) with DC Current Clamp, AC Power Clamp, Thermo & Irradiance Meter

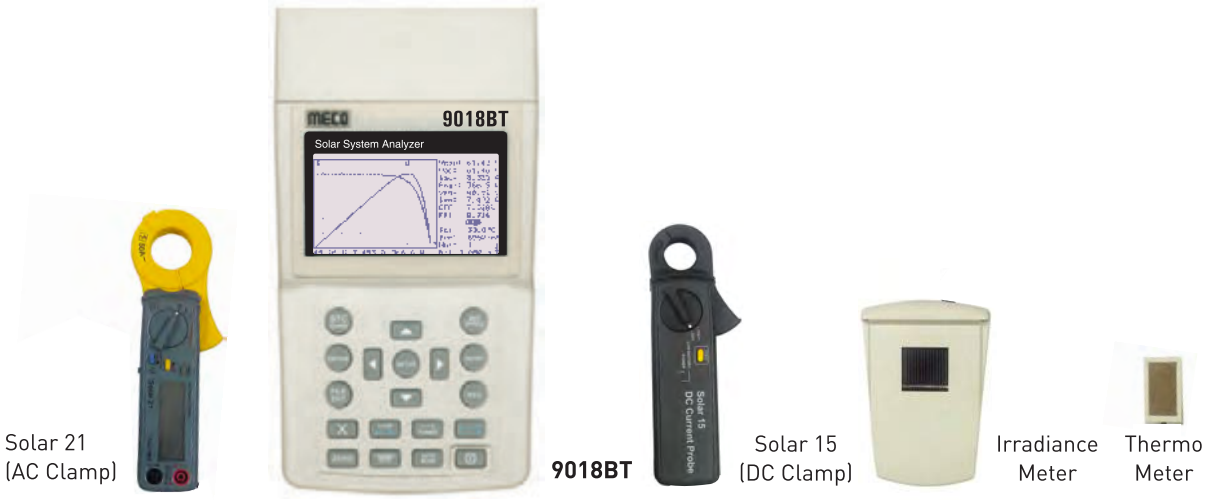

MECO Solar System Analyzer Model 9018BT is Portable Analyzer used for Testing, Monitoring, Measuring, Analyzing and Troubleshooting various parameters of Solar System. This System has Intelligent Test Logic with no personal attendance required. The System continuously monitor DC Output of Solar System and AC Power Output of Inverter, Calculate Efficiency of DC to AC Power Conversion and Maximum Output Power.

Features

- I-V Curve Test for Solar System
- Max. Solar System Power (Pmax) search by Auto-Scan : 1000V, 12A (12000W Capability)
- The Analyzer and the Remote Solar Detector is connected by Bluetooth Wireless Communication (Bluetooth 2.1 + EDR Class 1)
- The Remote Solar Detector is Moisture-Proof.
- Intelligent Test Logic with no personnel attendance required in the field.
- Max. Voltage (Vpm) at Pmax, Max. Current (Ipm) at Pmax
- Voltage at Open Circuit (Voc), Current at Short Circuit (Isc)
- Efficiency (%) Calculation of Solar System
- Temperature Measurement of Solar Panels
- Irradiance Measurement of Sun Light
- Series Resistance (Rs) Calculation of Solar Panels
- I-V Curve with Cursor to Display each Data Point
- With Data Logging / Open Function, the I-V Curves of Solar System can be analysed / recorded for a period of time (e.g. 60 min.)
- Conversion of I-V Curve under OPC to data under Standard Test Condition (STC) based upon IEC Standard
- Built-in Calendar Clock
- Users can set up the Parameters of Solar Panels
- Users can set up the Series number of Solar Panels. Parameters of many Solar Panels can be Measured in One Measurement.
- The Irradiances and Temperatures of Solar Panels can be continuously Measured, Monitored and Recorded.
- Rechargeable Lithium Battery, Low Battery Warning, AC Power Adaptor
- Optical USB Cable for PC Communication
- Solar Connector (optional)
- Provide Operating Condition (OPC) and Standard Test Condition (STC) test reports for Verification of Solar Panel Performance (OK, or NO OK)
- With Power Clamps (SOLAR 15 DC Current Probe and SOLAR 21 AC Power Clamp), continuously measure / monitor / record the DC Power output of Solar System and the AC Power Output of Inverter (1 phase or balanced 3 phases); calculate the Efficiency of DC to AC Power Conversion and the Efficiency of the max. output power.

Top & Rear Panel Connections

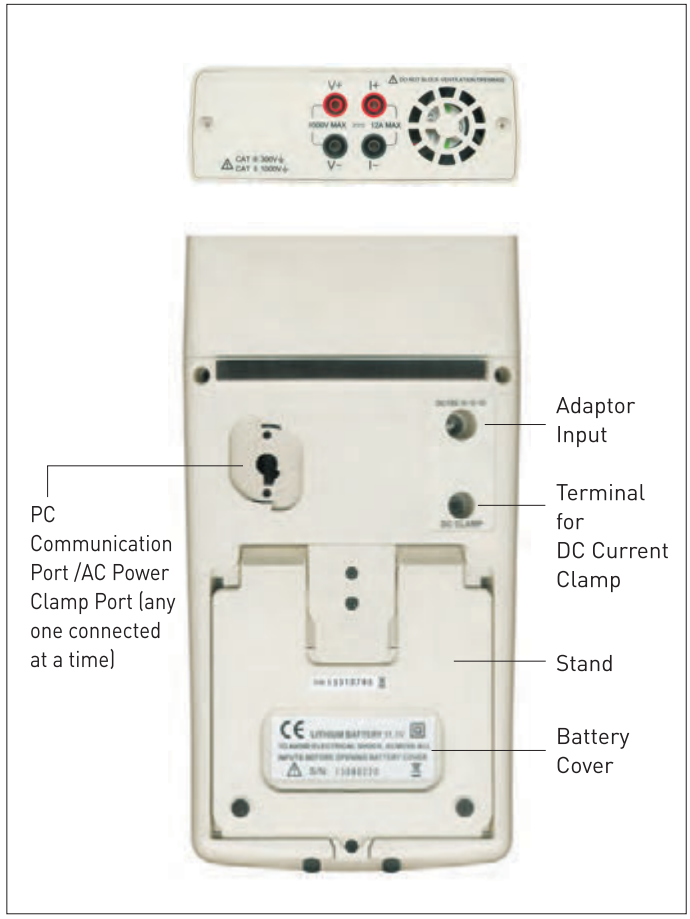

General Specifications for Solar System Analyzer

Battery Type	Rechargeable Lithium Battery (3400mAh)
Battery Life	400 times of linear scan (1000V ~ 1V, 0.1A ~ 12A), 8 hours for standby mode.
Memory Size	512K Bytes (3980 Mod files or 320 REC files or 3980 PWR files or 3980 IRR files)
AC Adaptor	AC 100 ~ 240V input, DC 15V / 1 ~ 3A output
Standards	EN 61323-1:2006 Class B, EN 61010-1:2010, IEC 6100-4-2:2008, CAT II 1000V, CAT III 300V & Pollution Degree 2
Operation Environment	5°C ~ 50°C, <85% RH
Temperature Coefficient	0.1% of full scale / °C (<18°C or >28°C)
Storage Environment	-20°C ~ 60°C, <75% RH
Dimension	260 x 158 x 64mm (approx.)
Weight	1580gms Batteries included (approx.)
Accessories	Solar Irradiance Meter (Remote Solar Detector) x 1, Thermometer x 1, USB power cord x 1, User manual x 1, AC adaptor x 1, Optical USB cable x 1, Rechargeable lithium battery (3400mAh) x 1 (installed), Software CD x 1, Software manual x 1, Carrying bag x 1, Thermal conductive gel x 1, Testing clips (1 black & 1 red), 4-wire to 2-wire connecting cable x 1, 4-wire testing (Extension) cable x 1, Solar 15 : DC current probe x 1, Solar 21: AC power clamp x 1, **Optional :** Solar Connector (1 black & 1 red)

Electrical Specifications (23°C ± 5°C, Irradiance ≧ 800W/m², Four-Wire Measurement, Maximum Power Limit is 12000W)

DC Voltage Measurement

Range	Resolution	Accuracy
1 ~ 1000V	0.01 V / 0.1 V / 1 V	± 1% ± (1% of Voc ± 0.1 V)

Voc : open circuit voltage of solar system

DC Current Measurement

Range	Resolution	Accuracy
0.1 ~ 12A	1mA / 10mA	± 1% ± (1% of Isc ± 9mA)

Isc : short circuit current of solar system

DC Current Simulation

Range	Resolution	Accuracy
0.1 ~ 12A	1mA / 10mA	± 1% ± 9mA

Irradiance Measurement

Range	Resolution	Accuracy
0 ~ 2000W/m²	1W/m²	± 3% ± 20dgts

Temperature Measurement

Range	Resolution	Accuracy
-22 ~ 85°C	0.1°C	± 1% ± 1°C

Conversion of OPC Data into STC Data

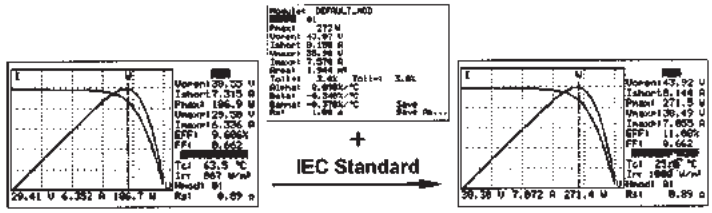

Operating Condition | Module Data | Standard Test Condition

AC Power Clamp (Solar 21)

Features

- Active (W, KW, HP), Reactive (VAR, KVAR) & Apparent (VA, KVA) Power
- Power factor (PF), Phase angle (Φ), & Energy (mWH, WH, KWH)
- Measurement of standby power consumption for IT products
- Non-interrupted AC current harmonic analysis
- 1 to 99th order of harmonics at 1.0% basic accuracy
- Total harmonic distortion (%THD-F) & crest factor (CF)
- True RMS measurement of V & A at 0.5% basic accuracy
- Fast peak function (39μs for 50Hz, 33μs for 60Hz)
- Measurement of balanced 3Φ power
- Measurement of balanced 3Φ sequence
- Programmable CT ratio from 1 to 250
- Max, Min & Data hold functions
- Leakage current measurement at 10μA resolution
- Active power in H.P.
- Shielded jaw immune to external interference

Electrical Specifications for AC Power Clamp (Solar 21)

AC Watt (50 or 60Hz, PF 0.6 to 1. CT = 1, Accuracy of Readings)

Range (0 to 30A)	Resolution	Accuracy of Readings
0.050 ~ 9.999W	0.001W	± 2% ± 0.025W
10.00 ~ 99.99W	0.01W	± 2% ± 0.25W
100.0 ~ 999.9W	0.1W	± 2% ± 2.5W
1.000 ~ 9.999KW	0.001KW	± 2% ± 0.025KW
10.00 ~ 99.99KW	0.01KW	± 2% ± 0.25KW
100.0 ~ 999.9KW	0.1KW	± 2% ± 2.5KW
1000 ~ 9999KW	1KW	± 2% ± 25KW

AC Voltage (50 or 60Hz, True RMS)			
Range	**Resolution**	**Accuracy** (50 or 60Hz)	**Accuracy** (45 ~ 1KHz)
5 ~ 250V	0.1 V	± 0.5% ± 5 dgt	± 1.5% ± 5 dgt
250 ~ 600V			

Harmonics of AC Voltage in % & Magnitude (1 ~ 99th order)				
Range	**Resolution in %**	**Accuracy in %**	**Resolution in Magnitude**	**Accuracy in Magnitude**
1 ~ 10th	0.1 %	± 1% of reading ± 1%	0.1V	± 1% of reading ± 7 dgts
11 ~ 20th		± 5% of reading ± 1%		± 5% of reading ± 7 dgts
21 ~ 50th		± 15% of reading ± 1%		± 15% of reading ± 7 dgts
51 ~ 99th		± 35% of reading ± 1%		± 35% of reading ± 7 dgts

Harmonics of AC Current in % & Magnitude (1 ~ 99th order)				
Range	**Resolution in %**	**Accuracy in %**	**Resolution in Magnitude**	**Accuracy in Magnitude**
1 ~ 10th	0.1 %	± 1% of reading ± 1%	0.01mA / 0.1mA / 0.001A / 0.01A	reading in mA : ± 1% of reading ± 2mA reading in A : ± 1% of reading ± 0.3A
11 ~ 20th		± 5% of reading ± 1%		reading in mA : ± 7% of reading ± 2mA reading in A : ± 7% of reading ± 0.3A
21 ~ 50th		± 15% of reading ± 1%		reading in mA : ± 15% of reading ± 3mA reading in A : ± 15% of reading ± 0.3A
51 ~ 99th		± 35% of reading ± 1%		reading in mA : ± 35% of reading ± 3mA reading in A : ± 35% of reading ± 0.3A

Frequency (Hz)			
Range	**Resolution**	**Accuracy of Readings**	**Allowed Input**
mA (45 ~ 65Hz)	0.1 Hz	± 0.5Hz	20mA ~ 1.2A
A (45 ~ 65Hz)			1A ~ 100A

Power Factor (PF, ACV > 4V, AC mA > 1mA, AC A > 0.04A, Watt > 50dgts) **& Phase Angle** (Φ, 50 or 60Hz)		
Range	**Resolution**	**Accuracy**
0.000 ~ 1.000	0.001	± 0.04
-180°to180° & 0°to360°	0.1°	± 2°

AC Watt (50 or 60Hz, PF 0.6 to 1. CT = 1, Accuracy of Readings)		
Range (30 to 50A)	**Resolution**	**Accuracy**
0.050 ~ 9.999W	0.001W	± 2% of VA ± 5 dgts
10.00 ~ 99.99W	0.01W	
100.0 ~ 999.9W	0.1W	
1.000 ~ 9.999KW	0.001KW	
10.00 ~ 99.99KW	0.01KW	
100.0 ~ 999.9KW	0.1KW	
1000 ~ 9999KW	1KW	

Total Harmonic Distortion (THD-F, 1 ~ 50th order)		
Range (45 to 65Hz)	**Resolution**	**Accuracy**
0.0 ~ 10.0%	0.1%	± 2%
10.0 ~ 40%		± 5% of reading ± 5%
40 ~ 100%		± 10% of reading ± 10%
100 ~ 999.9%		± 20% of reading

Peak Value of AC Periodic Voltage or AC Periodic Current		
Range	**Sampling Time**	**Accuracy of Readings**
50Hz	39μs	± 5% ± 30 dgts
60Hz	33μs	

Crest Factor (C.F., Accuracy of Readings)		
Range	**Resolution**	**Accuracy of Readings**
1.00 ~ 99.99	0.01	± 5% ± 30 dgts

Product Kit

Solar System Analyzer (Photovoltaic I-V Curve Tester) with DC Current Clamp, AC Power Clamp, Thermo & Irradiance Meter

DC Current Probe (Solar 15)

Features

- Accurate DC Current Probe for Current Measurement
- One Touch Zero for DCA adjustment
- 23mm Diameter Jaw

Electrical Specifications for DC Current Probe (Solar 15)

Range	Resolution	Accuracy
DC 12A	1mA / 10mA	± 2.0% ± 30mA

Applications

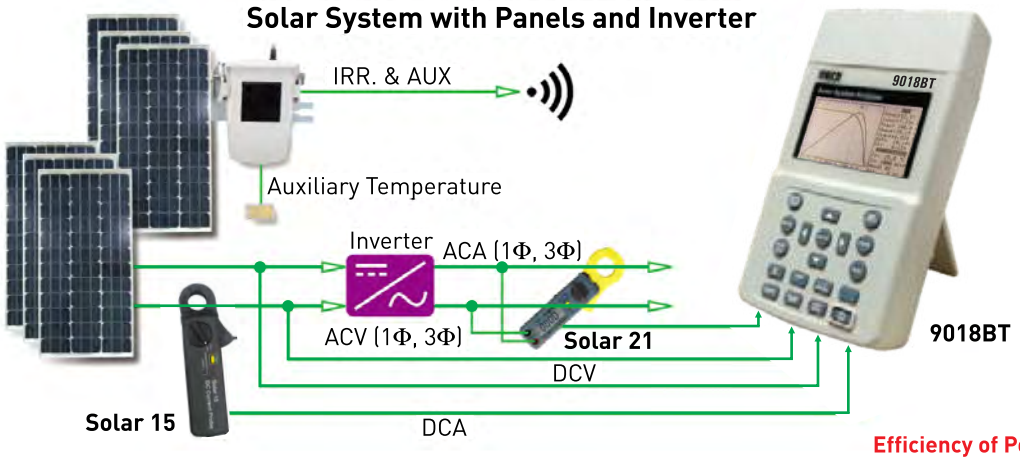

A. Quality Control at Production Line, Warehouse or Site of Installation

- Manufacturers of solar panels can test the characteristics for quality control purpose at the production line.
- Installation engineers can randomly test samples of solar panels at site to verify the quality of solar panels used at site of installation.

B. Identify Requirements of Solar Power System

- The unit can measure actual max. power (Pmax), voltage (Vpm) and current (Ipm) at max. power.
- Instead of the rated max. power, system designers need to be aware of the actual solar power from solar panels under actual operating conditions.

C. Maintenance of Solar Panels

- Maintenance engineers can store the characteristics data of solar panels in the beginning and compare the characteristics data in weekly, monthly or yearly maintenances.

D. Verify the Best Installation Angles of Solar Panels

- Engineers can collect data of the installation angles at different dates and time by using the unit at site of installation.
- The data can be used as a reference to design the automated angle adjustment system or the data can be used to select an optimal angle for a fixed angle installation.

E. Measure / Monitor / Record the DC Power Output & Efficiency

- Continuously Measure / Monitor / Record the DC power output of solar system and the AC power output of inverter (1 phase or balanced 3 phases)
- Calculate the efficiency of DC to AC power conversion and the efficiency of the max. output power

Efficiency of Power Mode

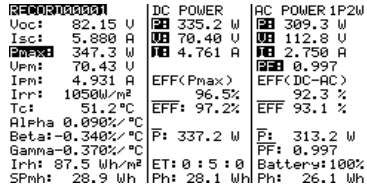

Normal I-V Curve

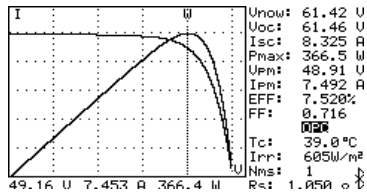

Abnormal I-V Curve (Cells at the corner of solar panel are defected)

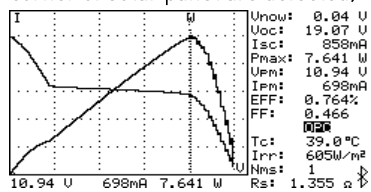

User Interface and Data Acquisition Software

File List



Print LCD



Cycle Scan



Solar Panel Test Report

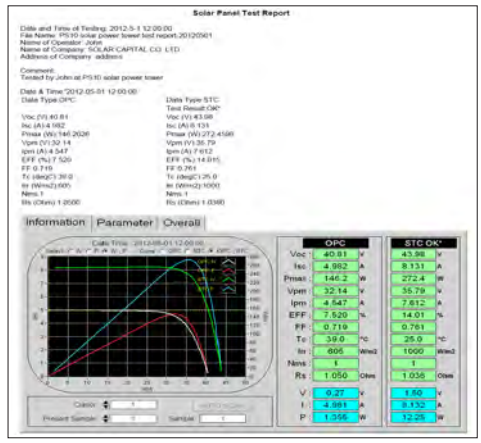

Setup



Power Curves

Irradiance / Temperature Recording

Solar Power Meter

CE

936

Applications

- Solar Power Plant
- Solar Radiation Measurements
- Solar Power Research for Location of the Solar Panels or Solar Water Heaters
- Physics and Optical Laboratories
- Meteorology
- Agriculture
- Windows Performance Calculate the Rate of Daylight Penetration

Features

- Solar Power Measurement with Orientation and Tilt Angle
- Measurement : Solar Power (illuminance), Orientation, Tilt Angle
- Solar Power Measurement Range : 2000 W/m^2 or 634 BTU / (ft^2.h).
- Easy Measurement for Rate of Daylight Penetration
- Auto Change for Measuring Range
- Auto Power off with Disable Function
- Instantaneous, Average, Min/Max Values, Data Hold
- 20 Points Memory, Low Battery Indicator
- Socket for Tripod Mounting
- Operation with 9V Battery
- Magnetic Mount
- Backlight LCD and 4 Digits Triple Display

Specifications

Sensor	High Sensitivity Silicon Photodiode
Spectral Response	400 ~ 1100 nm
Range	0 ~ 2000 W/m^2 (0 ~ 634 BTU / ft^2.h)
Accuracy (at 23°C, 60% RH)	± 10W/m^2 (± 3 BTU / ft^2.h) or ± 5% (whichever is greater)
Resolution	0.00 ~ 99.99 W / m^2 : 0.01 W / m^2,
	100.0 ~ 999.9 W / m^2 : 0.1 W / m^2 ,1000 ~ 2000 W / m^2 : 1 W/m^2
	0.00 ~ 99.99 BTU / ft^2.h : 0.01 BTU / ft^2.h,
	100.0 ~ 634.0 BTU / ft^2.h : 0.1 BTU / ft^2.h
Angular Accuracy	Cosine Corrected < 7% (angle < 60°)
Tilt Angle Range	0 ~ 90°
Tilt Angle Accuracy (at 23°C, 60% RH)	± 1.2°(≤ 60°), Additional Temperature Induced Error ± 0.1° / °C from 23°C
Sample Time	Approx. 0.4 Second
Operation Temp. & Relative Humidity	0°C ~ 50°C (32°F ~ 122°F) Less than 80% RH
Store Temp. & Relative Humidity	-10°C ~ 60°C (14°F ~ 140°F) Less than 85% RH
Auto Power Off	Enable or Disable (Auto Power off after approx. 10 minutes)
Battery Life	Approx. 30 Hours for Continuous Use
Max / Min / Avg	Yes
Data Hold	Yes
Low Battery Indication	Yes
Backlight Function	Yes
Zero Adjustment	Yes
Over Range Indication	Yes ("--HI--")
Memory	Yes (20 Points Memory)
Compass	Yes
Solar Transmission Measurement	Yes
Tripod Socket	Yes
Weight	220gms Including Battery (approx.)
Dimensions	Main Instrument : 140 x 49 x 29 mm (approx.)
	Sensor Probe : 83 x 54 x 26 mm (approx.)
Accessories	9V Battery, Instruction Manual, Carrying Case

MECO®

SINCE 1962

Environment Testing Instruments

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

CE

IRT380T

IRT550T

IRT1050P

Temperature Range	–50°C ~ 380°C	–50°C ~ 550°C	–50°C ~ 1050°C
	–58°F ~ 716°F	–58°F ~ 1022°F	–58°F ~ 1922°F
Accuracy	±1.5°C	±1.5°C	±1.5°C
Distance Spot Ratio	12 : 1	12 : 1	50 : 1
Emissivity	0.10 ~ 1.00 (Adjustable)	0.10 ~ 1.00 (Adjustable)	0.10 ~ 1.00 (Adjustable)
Repeatability	±1.5% or ±1.5°C	±1.5% or ±1.5°C	±1% or ±0.5°C
Wavelength	630 ~ 670nm	630 ~ 670nm	630 ~ 670nm
Resolution	0.1°C / 0.1°F	0.1°C / 0.1°F	0.1°C / 0.1°F
Spectral Response	6μm ~ 14μm	7μm ~ 14μm	8μm ~ 14μm
Special Function			
°C / °F Selection	✓	✓	✓
Laser Switch	✓	✓	✓
Auto Power Off	✓	✓	✓
Low Battery Indication	✓	✓	✓
Backlight Display	✓	✓	✓
MAX Function	✓	✓	✓
MIN Function	✓	✓	✓
DIF Function	✓	✓	✓
AVG Function	✓	✓	✓
Data Storage	–	–	✓
High / Low Temperature Alarm Settings Function	✓	✓	✓
Offset Displacement	✓(-3.0 to 3.0)	✓ (-3.0 to 3.0)	-
LCD Size	30 x 27mm	30 x 27mm	36 x 27mm
Packing Information			
Power	1.5V AAA x 2 Batteries	1.5V AAA x 2 Batteries	9V Battery
Product Color	Yellow + Black	Yellow + Black	Yellow + Black
Product Size	160 x 95 x 45mm (approx.)	160 x 95 x 45mm (approx.)	235 x 130 x 54mm (approx.)
Product Net Weight	150gms including battery (approx.)	150gms including battery (approx.)	278gms including battery (approx.)
Accessories	Drawstring Pouch x 1, Instruction Manual x 1, 1.5V AAA Battery (installed) x 2	Drawstring Pouch x 1, Instruction Manual x 1, 1.5V AAA Battery (installed) x 2	Heavy Duty Carry Box x 1, Instruction Manual x 1, Tripod Stand x 1, 9V Battery (installed) x 1

new

Preliminary Data

CE

IRT400T

IRT600T

Temperature Range	–50°C ~ 400°C	–50°C ~ 600°C
	–58°F ~ 752°F	–58°F ~ 1112°F
Accuracy	For <0°C (32°F) : ±3°C (±5.4°F) or ±3%	For <0°C (32°F) : ±3°C (±5.4°F) or ±3%
	For ≥0°C (32°F) : ±1.5°C (±2.7°F) or ±1.5%	For ≥0°C (32°F) : ±1.5°C (±2.7°F) or ±1.5%
Distance Spot Ratio	12 : 1	12 : 1
Emissivity	0.1 ~ 1.0 (Adjustable)	0.1 ~ 1.0 (Adjustable)
Repeatability	±1% or ±1°C / ±1°F	±1% or ±1°C / ±1°F
Resolution	0.1°C / 0.1°F	0.1°C / 0.1°F
Spectral Response	8μm ~ 14μm	8μm ~ 14μm
Special Function		
°C / °F Selection	✓	✓
Laser Switch	✓	✓
Auto Power Off	✓	✓
Low Battery Indication	✓	✓
Backlight Display	✓	✓
LCD Size	24 x 26mm	24 x 26mm
Packing Information		
Power	1.5V AAA x 2 Batteries	1.5V AAA x 2 Batteries
Product Color	Yellow + Black	Yellow + Black
Product Size	150 x 94 x 38mm (approx.)	150 x 94 x 38mm (approx.)
Product Net Weight	130gms including battery (approx.)	130gms including battery (approx.)
Accessories	Drawstring Pouch x 1, Instruction Manual x 1, 1.5V AAA Battery (installed) x 2	Drawstring Pouch x 1, Instruction Manual x 1, 1.5V AAA Battery (installed) x 2

CE

920P

Humidity & Temperature Meter

Humidity Measuring	
Functions	°C / °F / RH Selection, MAX / MIN, Auto Power Off
Range	0% ~ 100% RH
Accuracy	± 3%RH (25°C , 20 ~ 80% RH) ± 3.5%RH (At Other Ranges)
Resolution	0.01%RH
Temperature Measuring	
Range	- 20°C ~ 80°C / - 4°F ~ 176°F
Accuracy	±0.5°C / ±0.9°F (25°C) ±0.8°C / ±1.5°F (At Other Ranges)
Resolution	0.01°C / 0.01°F
Power	9V Battery
Dimension	173 x 56 x 39mm (approx.)
Weight	139gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)

961P

Air Flow Anemometer

Air Flow Measuring	
Functions	m / Sec, Ft / min, Knots, Km / h, MPH, CFM, MAX / MIN / HOLD, Auto Power Off
Range	1 ~ 25m/s
Accuracy	± (3% rdg ± 0.2m/s)
Resolution	0.01m/s
Temperature Measuring	
Range	0 ~ 50°C, 32 ~ 122°F
Accuracy	± 2°C / ± 4.0°F
Resolution	0.1°C / 0.1°F
Power	9V Battery
Dimension	202 x 56 x 39mm (approx.)
Weight	155gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)

970P

Digital Sound Level Meter

930P

Digital LUX Meter

930T

Digital LUX Meter with Flexible Sensor

	Digital Sound Level Meter	Digital LUX Meter	Digital LUX Meter with Flexible Sensor
Functions	MAX / MIN / HOLD, Auto Power Off	MAX / MIN, Backlight, Auto Power Off	MAX / MIN, Backlight, Auto Power Off with Disable Feature, Data Hold
Range	35dB ~ 130dB (31.5Hz ~ 8 Khz)	0 ~ 200,000 lux 0 ~ 20,000 fc	0.1 ~ 200,000 lux 0.0 ~ 20,000 fc
Accuracy	± 1.5dB (under reference conditions)	±5% rdg+10 dgt (<10.000 lux/fc) ±10% rdg+10 dgt (>10.000 lux/fc)	±3% + 30 dgt
Resolution	0.1dB	0.1lux or 0.1fc	0.1 lux or 0.1 fc
Selection	-	lux / fc	lux / fc
Power	9V Battery	9V Battery	1.5V AAA x 2 Batteries
Dimension	172 x 56 x 39 mm (approx.)	190 x 56 x 39mm (approx.)	157 x 54 x 34mm (approx.)
Weight	144gms Including Battery (approx.)	135gms Including Battery (approx.)	70gms Including Battery (approx.)
Accessories	Carrying Case, Inst. Manual, 9V Battery (installed)	Carrying Case, Inst. Manual, 9V Battery (installed)	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (installed)

new
Preliminary Data
CE

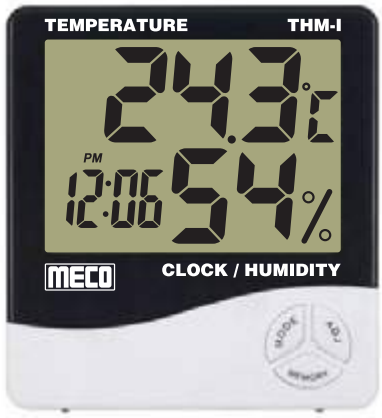

THM-I

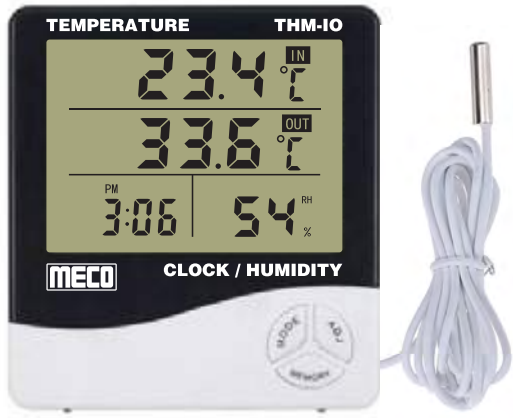

THM-IO

Applications

- Home, Office
- Laboratory
- Hospital
- Green House
- Hotels and many more....

Specifications

Functions	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar	°C / °F Selection, MAX / MIN, Integral Hour Alarm, Clock & Calendar
Display	Temperature (Indoor), Humidity and Time Simultaneously	Temperature (Indoor & Outdoor), Humidity and Time Simultaneously
Temperature Range	Indoor -20°C ~ 70°C / -68°F ~ 158°F	Indoor -20°C ~ 70°C / -68°F ~ 158°F Outdoor -20°C ~ 90°C / -68°F ~ 194°F
Temperature Accuracy	± 1.0°C / ± 1.8°F	± 1.0°C / ± 1.8°F
Temperature Resolution	0.1°C / 0.2°F	0.1°C / 0.2°F
Humidity Range	10%RH - 99%RH	10%RH - 99%RH
Humidity Accuracy	± 5% (40%RH ~ 80%RH)	± 5% (40%RH ~ 80%RH)
Humidity Resolution	1%RH	1%RH
Power	1.5V AAA x 1	1.5V AAA x 1
Dimension	100 x 90 x 20mm (approx.)	100 x 90 x 20mm (approx.)
Weight	160gms (approx.)	160gms (approx.)
Accessories	Battery : 1.5V AAA x 1	Battery : 1.5V AAA x 1, Outdoor Sensor (1M Length)

new
Preliminary Data
CE

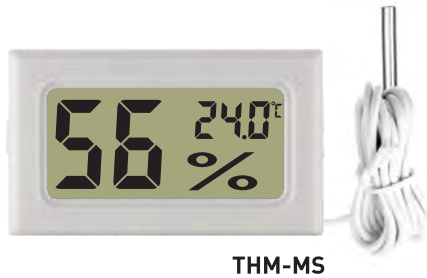

THM-MS

Applications

- Indoor and Outdoor
- Refrigerator
- Inside and Outside Car
- Fish Tank
- Pool Water Temperature and many more....

Specifications

Display	LCD Display
Temperature Range	-50°C ~ 110°C / -58°F ~ 230°F
Temperature Accuracy	± 1.0°C / ± 1.8°F For Range :-20 ~ 100°C / 68 ~ 212°F
Temperature Resolution	0.1°C / °F
Power Supply	AG13, 3.0V x 2 Batteries
LCD Display Size	36 x 16mm (approx.)
Casing Size	60 x 40 x 20mm (approx.)
Panel Cut Out Size	46 x 27mm (approx.)
Weight	35gms (approx.)
Accessories	AG 13, 3.0V x 2 Batteries, Sensor (1M Length)

CE

LDM60

LDM100

Functions

- Addition / Subtraction
- Area Measurement
- Volume Measurement
- Pythagorean Measurement
- Laying Off
- Data Storage / Paging Out

Display Screen

1. Laser Emission Indicator
2. Reference Edge (Front)
3. Reference Edge (Behind)
4. Pythagorean Theorem Measurement
5. Multifunctional Measurement
   - Area Measurement
   - Volume Measurement
6. Battery Indicator
7. Stored Data Indicator
8. The Emission Signal Display
9. Signal Strength Indicator
10. The Third Display Line
11. The Second Display Line
12. The First Display Line
13. Main Display Area (Result)



Applications

Specifications

Model	LDM60	LDM100
Range	0.05 ~ 60m	0.05 ~ 100m
Measuring Accuracy up to 60 / 100m (in the room)	± (3.0mm + 5 x 10^{-5} x D)	± (3.0mm + 5 x 10^{-5} x D)
Measurement Time	0.1 ~ 3 Sec	0.1 ~ 3 Sec
Units	Meter / Inches / Feet	Meter / Inches / Feet
Smallest Unit Displayed	1mm	1mm
Laser Class	Class II	Class II
Laser Type	620~670nm, <1mw	620~670nm, <1mw
Automatic Switch Off	3 Minutes Of Inactivity	3 Minutes Of Inactivity
Display Illumination (Backlight)	✓	✓
Min / Max, Measurement / Continuous Measurement	✓	✓
Addition / Subtraction	✓	✓
Pythagoras Measurement	✓	✓
Area / Volume Calculation	✓	✓
Triangular Area Measurement	✓	✓
Historical Storage	✓ (20)	✓ (20)
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C
Power	1.5V AAA x 2 Batteries	1.5V AAA x 2 Batteries
Battery Life	Up to 15000 Measurements	Up to 15000 Measurements
Rating (Dust Proof & Water Proof)	IP54	IP54
Product Size	118 x 57 x 32mm (approx)	118 x 57 x 32mm (approx)
Product Weight	120gms (Including Batteries) approx.	120gms (Including Batteries) approx.
Accessories	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (installed)	Carrying Case, Inst. Manual, 1.5V AAA x 2 Batteries (installed)

Thermal Imaging Cameras combines the functions of surface temperature measurement and real time thermal imaging.

Traditional Thermal Imaging Cameras measure each component one by one, but these cameras do it together thus saving user's time & effort. The potential problem is clearly displayed on the color screen which helps user to quickly locate the central point and temperature of the problem area.

To improve recognition, these products are equipped with a vision camera. Based on practical requirements, it can turn thermal image into visional image. Thermal image and vision image can be stored in the memory card. User can adjust the images and store them in PC and also generate reports or do printing. Within seconds the testing can be complete & it can quickly find out the problem area. These products are ideal for people in field of Electrical Maintenance, HVAC Installation / Maintenance, Equipment Manufacturer, Process Plant Management, Building / Facility Survey and Management to name a few.

Applications

Hot Kettle

Air Vent / Window

Automobile Engine

Electrical Panel (Bus-Bar)

Flame / Lighter

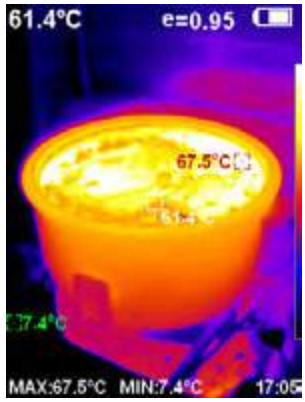

Smelting Pot

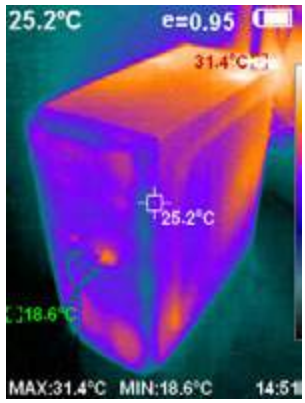

CPU / UPS

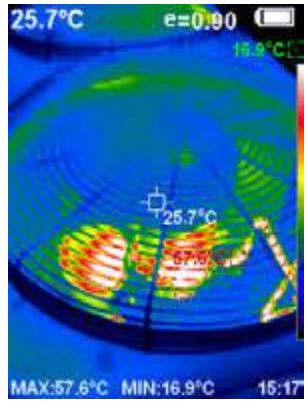

Electric Fan

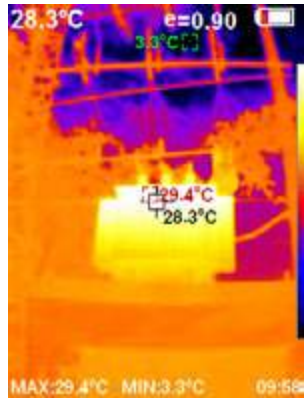

Electrical Transformer

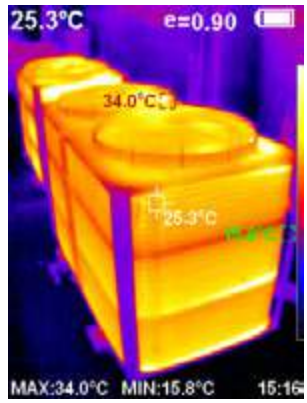

Cooling Towers

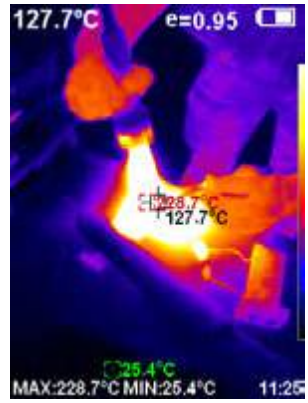

Soldering Iron

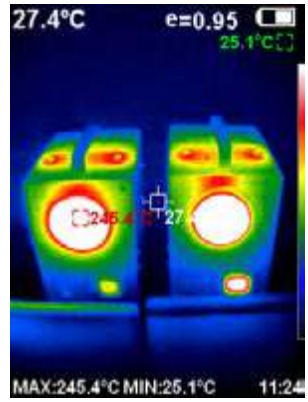

Washing Machine

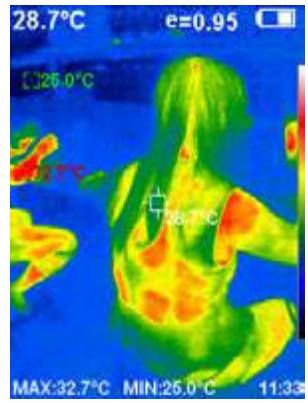

Human Body

new

Preliminary Data

CE

TIC 300

TIC 450

Specifications

Display	2.4" Color Display	2.8" Color Display
Infrared Image Resolution	60 x 60	160 x 120
Total Pixels	3600	300000
LCD Resolution	-	320 x 240
FOV / Shortest Focal Length	20° x 20° / 0.5m	35° x 26° / 0.15m
Thermal Sensitivity	0.3°C	0.07°C
Temperature Range	-20°C ~ 300°C (-4°F ~ 572°F)	-20°C ~ 450°C (-4°F ~ 842°F)
Measuring Accuracy	±2% Digit / ±2°C	±2% Digit / ±2°C (Greater than 300°C±5%)
Wavelength Range	8 ~ 14μm	8 ~ 14μm
Image Capturing Frequency	6Hz	9Hz
Emissivity	0.1 ~ 1.0 (Adjustable)	0.01 ~ 1.0 (Adjustable)
Focus Mode	Fixed	Fixed
Palette	Iron Color, Rainbow High Contrast, Gray Scale (Black Glow) And White Scale (White Glow)	Rainbow, Iron Oxide Red, Cold Color, Black & White, White & Black
Image Storage	Micro SD Card (4GB)	Built in 3GB (Above 20 Thousand Image Stored)
File Format	BMP	JPG
USB	-	Micro USB 2.0
Set Control	Unit Adjustment / Language / Date Time Format / Automatic Shutdown	Unit Adjustment / Language / Date Time Format / Automatic Shutdown
Battery Type	AA x 4 Alkaline Batteries	Built-in Chargeable 18650 Battery (Detachable)
Automatic Power-Off Time	12 Minutes	Selectable : 5min. / 20min. / No Power Off
Operating Temperature	-5°C ~ 40°C	0°C ~ 45°C
Storage Temperature	-20°C ~ 50°C	-20°C ~ 60°C
Relative Humidity	10% RH ~ 80% RH	<85% RH
Size	212 x 95 x 62mm (approx.)	226 x 96 x 72mm (approx.)
Weight	320gms (approx.)	389gms (approx.)
Waterproof Rating	IP54	IP54
Accessories	Carrying Case, Inst. Manual, Micro SD Card (installed), Wristlet, AA x 4 Batteries (installed)	Carrying Case, Inst. Manual, AC Adapter, USB Cable, Wristlet, Built-in Chargeable Battery (installed)

new

Preliminary Data

CE

USB

HTIC 300

TIC 300HR

Specifications

Display	3.2" Full Angle TFT Display Screen	3.2" Full Angle TFT Display Screen
Infrared Image Resolution	220 x 160	320 x 240
Total Pixels	640 x 480 (300000 Pixel)	300000
LCD Resolution	320 x 240	320 x 240
FOV / Shortest Focal Length	27° x 35°/ 0.15m	35° x 26° / 0.15m
Thermal Sensitivity	0.07°C	0.07°C
Temperature Range	-20°C ~ 300°C (-4°F ~ 572°F)	-20°C ~ 300°C (-4°F ~ 572°F)
Measuring Accuracy	±2% Digit / ±2°C	±2% digit / ±2°C
Wavelength Range	8 ~ 14μm	8 ~ 14μm
Image Capturing Frequency	9Hz	9Hz
Emissivity	0.01 ~ 1.0 (Adjustable)	0.01 ~ 1.0 (Adjustable)
Focus Mode	Fixed	Fixed
Palette	Rainbow, Iron Oxide Red, Cold Color, Black & White, White & Black	Rainbow, Iron Oxide Red, Cold Color, Black & White, White & Black
Image Storage	Built in 3GB (Above 20 Thousand Image Stored)	Built in 3GB (Above 20 Thousand Image Stored.)
USB	Micro USB 2.0	Micro USB 2.0
File Format	JPG	JPG
Set Control	Unit Adjustment / Language / Date Time Format / Automatic Shutdown	Unit Adjustment / Language / Date Time Format / Automatic Shutdown
Battery Type	Built in Chargeable 1800 Battery	Built in Chargeable 18650 Battery
Automatic Power-Off Time	Selectable : 5min./ 20min. / No Power Off	Selectable: 5min./ 20min./ No Power Off
Operating Temperature	0°C ~ 45°C	0°C ~ 45°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Relative Humidity	<85% RH	<85% RH
Size	140 x 80 x 28mm (approx.)	223 x 105 x 90mm (approx.)
Weight	208gms (approx.)	389gms (approx.)
Waterproof Rating	IP54	IP54
Accessories	Carrying Case, Inst. Manual, AC Adapter, USB Cable, Wristlet, Built-in Chargeable Battery (installed)	Carrying Case, Inst. Manual, AC Adapter, USB Cable, Wristlet, Built-in Chargeable Battery (installed)

Digital HVAC Manifold Gauge Meter
Digital HVAC Manifold Gauge Meter with Clamp-On Temperature Sensor

new

Preliminary Data

CE

Temperature Clamp-On Sensor

Temperature Clamp-On Sensor

Heavy Duty Carry Case

Batteries

9900 / 9900T

MECO 9900 / 9900T is an advanced and user friendly Digital HVAC Manifold Gauge Meter. The Meter has a large easy to read LCD display which shows High Side / Low Side Pressure, Saturated Temperature, Evaporation Temperature for 89 Refrigerants.

The Manifold Meter is a must-have for someone working on HVAC System as it is on ideal tool for testing of all Air Conditioning Systems. This Air Conditioning Manifold Meter can be used as a diagnostic tool to check pressure and determine if there is a leak. It can also be used as a service tool to perform recharge and evacuation. They are used to remove contaminated refrigerant to decrease the rates of cross-contamination or to recharge your air conditioning system to keep your system working smoothly & efficiently.

Features

- 89 Refrigerant Profiles Stored in the Instrument
- Large 2-line LCD Backlit Display
- Measuring High Side / Low Side Pressure / Display Saturation / Evaporation Temperature
- 2-Way Valve Block with Three Connections
- Test Refrigerants Condensation & Evaporation Temperature
- Vacuum Pressure Test
- Pressure Drop Test & Leak Logging Test
- Overload Pressure 10Mpa
- Pressure Measurement Units are PSI, INHg, Bar, Kpa, Mpa
- Temperature Units are °C & °F
- Direct T1 T2 Temperature, Real Time Super Heat & Sub Cooling simultaneously Display with Two Temperature Clamp

Specifications

Specifications	Range	Resolution	Accuracy
Pressure Test	-100 Kpa ~ 6000 Kpa	1 Kpa	± 0.5% FS
Vaccum Test	-101 Kpa ~ 0 Kpa	1 Kpa	-
Temperature Test for (9900T)	-40 ~ 150°C	0.1°C for (-40 ~ 99.9°C) 1°C for 100 ~ 150°C	± 0.5°C ± 2 Dgt FS
Power Supply	1.5V AA Batteries		
Dimension (Meter)	170 x 110 x 50mm (approx.)		
Weight (Meter)	950gms (approx.)		
Accessories	**9900**	**9900T**	
	1.5V AA Batteries x 4 pcs, Refrigerant Charging Hose Pipe x 3 pcs, Heavy Duty Carry Case x 1 pc	1.5V AA Batteries x 4 pcs, Refrigerant Charging Hose Pipe x 3 pcs, Temperature Clamp-On Sensor x 2 pcs. Heavy Duty Carry Case x 1 pc	

new
Preliminary Data
CE

AQD-99

Handheld Air Quality Detector is a special detecting instrument used to measure the value of PM2.5 (repairable particles) and PM10 (inhalable particle) in the air. The device is characterized by high test precision, stable performance, strong multiple functions and easy and convenient operation and can be used widely for determination of indoor / outdoor public environment and atmospheric environment, PM2.5 air quality detection and PM2.5 dust particle amount.

Specifications

Principal Of PM2.5 Sensors	Optoelectronic Type
Sampling Method	Pumping Type
Test Particle Size	0.3μm / 2.5μm / 10.0μm
Light Source	Laser Diode
Flow Rate	1L / min
Formaldehyde Range	0-1000ug/m3
Resolution Ratio	1 ug
Test Method	Manual
Sampling Time	50s
Sampling Method	Pumping Type
Typical Precision	<20%
Concentration Unit	Piece / L / ug / m3
Temperature Range	0°C~50°C / 32~122°F
Typical Precision	±1.0°C
Humidity Range	0~99% RH
Accuracy	±2% RH
Display	320 x 240 Pixel 2.8" LCD Display
Counting Efficiency	100 ±10% @ 0.5μm
Sampling Frequency	1~99 / Continuous
Alarm Level	1~100,000 (FED209E Standard), 2~9 (ISO14464-1Standard)
Data Storage	2005 Sets
Interface	USB
Operating Environment	10°C~50°C, 10~90% RH
Storage Environment	-20°C~60°C<90% RH
Startup Current	120mA
Working Current	280mA
Power Supply	3.7V Lithium Battery
Automatic Power Off	2 Minutes (No Key Operation)
Size	245 × 85 × 40mm
Weight	310g (Battery Included)

Air Quality Grade

Pollution Level Diagram	Air Quality Grade	24 Hours PM 2.5 Average Standard Value
	Excellent	0 - 35
	Good	35 - 75
	Slight Pollution	75 - 115
	Moderate Pollution	115 - 150
	Severe Pollution	150 - 250
	Severe Pollution	>250

Applications

It is used in Medical, Electronics, Precision Machinery, CPT Manufacturing, Microbiological and other Industries. Indoor / Outdoor Public Environment and Atmospheric Environment.

Customer Approvals / Appreciation

MAHANAGAR GAS LTD.

City Gate Station, Opp. Amit Depot, Sion, Mumbai - 400 022. Tel. : 2404 5745 • Fax : 2401 0080

30 DEC 2011

Date:December 26, 2011

To,
Mr. Kamal Goliya – C.E.O.
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710
Tel. No. 022 – 27673300 Fax No. 022 – 27673310

Dear Sir,

Sub.: Training, Live Demonstration at MECO – Mahape Work and Performance of MECO Make Power & Harmonics Analyser Model PHA- 5850 – B.
Ref.: Purchase Order No. MGL/C&P/4500001382/10-11/BB Dated 26 June 2011 for Supply of Three Phase Power Quality Analyzer (MECO-Power & Harmonics Analyser, PHA-5850B)

We thank Mr. Haren Shah-Marketing Executive for imparting Satisfactory Training and Demonstration to all our following Engineers who were present at your work on 14th October'2011. Our Engineer team member were also satisfied with the interaction and question / answer session.

Name:	Designation	Name:	Designation
Ms. Dipti Lohchab	Executive	Mr. Manish Gupta	Asst. Manager
Mr. Vinkal Kotangale	Executive	Mr. Mahesh Koite	Asst. Manager
Mr. Manas Khaire	Asst. Manager	Mr. Ganesh Patil	Asst. Manager
Mr. Vaibhav Pagnis	Asst. Manager	Mr. Pramod Kamble	Asst. Manager
Mr. Bhushan Kamble	Asst. Manager	Mr. Suhas Mandh	Sr.Asst.
Mr. Abhinav Nigam	Asst. Manager	Mr. Mahesh Koite	Sr.Asst.
Mr. Manish Gupta	Asst. Manager		

We are pleased to inform you that MECO Make Power & Harmonics Analyser Model PHA- 5850B Kit supplied to us against above purchase order is working satisfactory. Purpose of purchasing the same instruments gives us satisfactory results as per our requirements and application.

We look forward in future to have similar technical support as and when require.

Thanking You,
For Mahanagar Gas Limited.

Pratap Ayarekar
Manager – O & M

TATA

2 8 NOV 2013

TO WHOMSO EVER IT MAY CONCERNED

We have purchased the Power and Harmonic Analyzer model PHA 5850 from Meco Instruments Pvt Ltd, Mumbai and the performance of the instrument during the energy audit was found to be excellent. I also appreciate the excellent service support provided by Mr Haren Shah during the last 2 years in formulating the Energy Audit reports and also software support in case of an emergency at the field

I find the Analyzer PHA 5850 is a very cost effective and an efficient Electrical tool and is essential for an Energy auditor.

For Tata Global Beverages Ltd

Radhakrishnan Nair R
(Sr Manager- Engineering and Establishments)

Date 22.11.2013

TATA GLOBAL BEVERAGES LIMITED
Kirloskar Business Park Block C 3rd & 4th Floor Hebbal Bengaluru 560 024
Tel 91 80 67171200 Fax 91 80 67171201
Registered Office: 1 Bishop Lefroy Road Kolkata 700 020

---

nelco

Date: 17/12/2014

To,
Director,
M/s. Meco Instruments Pvt. Ltd.
Plot No. 1, MIDC Electronic Zone,
TTC Industrial Area, Mahape, Navi Mumbai – 400 710
Tel. No. 022 – 27673300 Fax No. 022 – 27673310

Dear Sir,

Sub:- Visit at NELCO'S Mahape Work to Monitor & Record Power Consumption Data at 2 X 160KVA UPS Output Panel with MECO Power & Harmonics Analyzer Model PHA 5850 Kit.

Please refer visit of Mr. Haren Shah - Senior Marketing Executive of Meco Instruments Pvt. Ltd. Navi Mumbai at our above work as on 28/11/2014 with MECO Power & Harmonics Analyzer Model PHA 5850A for the above subject.

The visit was in accordance with request by Mr. Sanjay Sinvhal to MECO to Monitor and Record the Power consumption at various points of 160KVA UPS Output Panel installed at NELCO'S Server Room.

Mr. Shah showed us Online Power Parameters on PHA 5850 which were witnessed by Mr. Sanjay Sinvhal and Mr. Nitin Kulkarni. The recorded data with reports were then sent to us by Email from Mr. Shah very next day. The Reports and data received by us were very satisfactory and as per our expectation.

We thanks Mr. Haren Shah to carry out such activity in short notice. We also appreciate Mr. Shah for excellent service provided to us with report and data.

We find MECO Analyzer Model 5850 Kit is very useful for Online monitoring and recording the Power and Harmonics data. This instrument is also helpful for Energy Monitoring purpose at several locations and time to time.

Thanking You,
Yours Faithfully,

Nelco Ltd.

Nitin Kulkarni
Officer Maintenance

A TATA Enterprise

सीएसआईआर–केन्द्रीय खनन एवं ईंधन अनुसंधान संस्थान
(वैज्ञानिक तथा औद्योगिक अनुसंधान परिषद्)
बरवा रोड धनबाद – ८२६०१५ . झारखण्ड . भारत

CSIR-Central Institute of Mining & Fuel Research
(Council of Scientific & Industrial Research)
Barwa Road, Dhanbad - 826015, Jharkhand, India

2 7 AUG 2016

Shri Prasad Bhokya
Scientist
Electrical Design Section
Electrical Design & Safety Research Group

SPEED POST

Ref. No.: CIMFR/EDS/PB/MIS/001 | 570

Dated 25/08/2016

To

MECO Instruments Private limited.
Plot EL-1, MIDC Electronic Zone,
TTC Industrial Area, Mahape
Navi Mumbai-400710 (INDIA)
Tel: +91-22-27673311-16(sales)

Your ref: E-mail dated 09.08.2016 from MECO (Haren Shah), Mumbai

Dear Sir,

I would like to express gratitude for providing solution to the software installation issue code access during operation of the Power and Harmonics Analyzer-5850C model to MECO Instruments Private Limited, Mumbai.

I would like to express my special thanks to Mr. Haren Shah who attended the technical problem very positively on phone and by E-mail also and later he has provided solution to software installation issue in very less time.

Thank you for your great support in minimum time

Yours faithfully,

(Prasad Bhokya)

EPABX : 0091-326-229-6027/6028/6029
Fax : 0091-326-229-6025 , email : domrps@yahoo.co.in
Working Days : Monday to Friday, Website : www.cmfr.nic.in

MECO®

SINCE 1962

Power & Harmonics Analyzers

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Power & Harmonics Analyzer

SOFTWARE

CE

USB

MECO supports Bureau of Energy Efficiency (BEE), Govt. of India's mission to institutionalize certification of Electric / Electronic goods for ECOMARK under Gazette of India

PHA 5850

Under BEE's PAT Scheme (Perform, Achieves & Trade) it is mandated to compulsorily improve their Energy Efficiency by adopting all the available measures including replacement of their old Equipments with New and Energy Efficient Equipments

Versatile Handy instrument using micro controller technology and easy to use software program for recording and downloading.

Useful for time to time monitoring of Power Parameters, Energy and Presence of Harmonics at several Location / Machines.

Cost Effective & Efficient Tool for Energy Auditor, Maintenance Persons, Service Providers, Site / Plant Engineers.

MECO Power and Harmonics Analyser Model PHA-5850 can Analyze, Measure, Monitor & Data Log values of Power Quality & Consumption (Energy). Capable of analyzing IT standby power consumption to the maximum demand of factory. It comes with a user friendly application software that increases the utility & performance of this instrument. The analyzer is ideal for an any Engineer / Inspector for carrying out Periodic Visits, Maintainance of Plant, Vigilance checks, Surveys and Energy Audits for checking at Industrial and Consumers end.

Features:

- Analysis of 3P4W, 3P3W, 1P2W, 1P3W Systems
- Display of 35 Parameters in one screen (3P4W)
- Programmable CT (1 to 600) and PT (1 to 3000) Ratios
- Graphic Phasor Diagram
- RMS, PEAK Value & Crest Factor
- True RMS value, Active Power, Apparent & Reactive Power (KVA, KVAR)
- Power Factor, Phase Angle (Φ) & Energy (WH, KWH, KVARH, PFH)
- Average / Maximum Demand (KW, MW, KVA, MVA) with Programmable Period
- Display of 50 Harmonics in one Screen with Wave form with Peak value (1024 Sample / Period)
- Analysis of Total Harmonic Distortion **(THD-F)**
- Capture 28 Transient Events with Programmable Threshold (%) (DIP, SWELL & OUTAGE)
- Built in timer & Calendar for Data Logging
- Facility to retrieve Power Data & Harmonics on Meter Screen
- 512K Memory with Programmable Interval (2 to 3000 seconds, 17000 records for 3P4W System)
- Optical Isolated RS-232C~USB Interface
- Software for easy download of Recorded Data & Transient events
- Calculated Unbalanced Current through Neutral line

General Specification : PHA5850

Battery Type	1.5V SUM-3 x 8
External DC Input	Power supply adapter 12 Volts. DC
Display	Dot Matrix LCD (240x128) with backlight
LCD Update Rate	1 time / second
Power Consumption	140mA (approx.)
No. Of Samples	1024 samples / period
Data Logging Files	85
Max. File Capacity	17474 records (3P4W, 3P3W)
	26210 records (1P3W)
	52420 records (1P2W)
	4096 records (50 Harmonics / record)
Sampling Time	2 to 3000 seconds for data logging
Low battery Indication	B
Overload Indication	OL

Operating Condition	-10°C to 50°C ≤ 85% RH
Storage Condition	-20°C to 60°C ≤ 75% RH
Dimension	257 x 155 x 57 mm
Weight	1160 g (Batteries included)

Accessories	Voltage Test Leads	x 4 (3 meter long)
	Alligator Clips (Voltage)	x 4 (R.Y.B.N.)
	Carrying Bag	x 1
	Batteries 1.5V DC	x 8
	External DC Adaptor	x 1
	Software CD	x 1
	Users Manual	x 1
	Software Manual	x 1
	Optical USB Cable	x 1
	Current Clamps	x 3 (Any One CT Set)

Specifications : (23°C ± 5°C)

AC Current
(50Hz or 60Hz, Auto Range, True RMS, Crest Factor <4, CT=1)

Model : PHA-5850A (100A) (Overload Protection AC 200A)

Range	Resolution	Accuracy of Readings
0.04 - 1A	0.1mA / 1mA	± 0.5% ± 0.05A
0.4 - 10A	0.001A / 0.01A	± 0.5% ± 0.05A
4 - 100A	0.01A / 0.1A	± 1.0% ± 0.5A

Model : PHA-5850B (1000A) (Overload Protection AC 2000A)

Range	Resolution	Accuracy of Readings
10.00A	0.001A / 0.01A	-
5A - 100.0A	0.01A / 0.1A	± 0.5% ± 0.5A
50A - 1000.0A	0.1A / 1A	± 0.5% ± 5A

Model : PHA-5850C (3000A) (Overload Protection AC 3000A)

Range	Resolution	Accuracy of Readings
10.0 - 300.0A	0.01A / 0.1A	± 1% of range
300.0 - 3000A	0.1A / 1A	

Model : PHA-5850D (1200A) (Overload Protection AC 1200A)

Range	Resolution	Accuracy of Readings
6.0 - 120.0A	0.01A / 0.1A	± 1% of range
120.0 - 1200A	0.1A / 1A	

Harmonic of AC Voltage in Percentage

Range	Resolution	Accuracy
1 - 20th	0.1%	± 2%
21 - 49th		± 4% of reading ± 2.0%
50 - 99th		± 6% of reading ± 2.0%

Harmonic of AC Current in Percentage
Model : PHA-5850A (100A)

Range	Resolution	Accuracy
1 - 10th	0.1%	± 0.2% of reading ± 1%
11 - 20th		± 2% of reading ± 1%
21 - 50th (A range)		± 5% of reading ± 1%
21 - 50th (mA range)		± 10% of reading ± 1%
51 - 99th		± 35% of reading ± 1%

Model : PHA-5850B (1000A)

Range	Resolution	Accuracy
1 - 20th	0.1%	±2%
21 - 49th		± 4% of reading ± 2.0%
50 - 99th		± 6% of reading ± 2.0%

Model : PHA-5850C (3000A) & PHA-5850D (1200A)

Range	Resolution	Accuracy
1 - 20th	0.1%	±2 %
21 - 50th		± 6%
51 - 99th		± 10%

AC Watt
(50Hz or 60Hz, PF 0.5~1, CT=1, continuous waveform)

Model : PHA-5850A (100A)

Range (0 to 100A)	Resolution	Accuracy of Readings
5.0 - 999.9W	0.1W	± 1% ± 0.8W
1.000 - 9.999KW	0.001KW	± 1% ± 8W
10.00 - 99.99KW	0.01KW	± 1% ± 80W
100.0 - 999.9KW	0.1KW	± 1% ± 0.8KW
1000 - 9999KW	1KW	± 1% ± 8KW

Model : PHA-5850B (1000A)

Range (0 to 1000A)	Resolution	Accuracy of Readings
5.0 - 999.9W	0.1W	± 1% ± 0.8W
1.000 - 9.999KW	0.001KW	± 1% ± 8W
10.00 - 99.99KW	0.01KW	± 1% ±8 0W
100.0 - 999.9KW	0.1KW	± 1% ± 0.8KW
1000 - 9999KW	1KW	± 1% ± 8KW
0.000 - 9.999MW	0.001MW	± 1% ± 80KW

Model : PHA-5850C (3000A)
Model : PHA-5850D (1200A)

Range (0 to 3000A or 0 to 1200A)	Resolution	Accuracy of Readings	
		>20V & >30A	<20V or <30A
10.0 - 999.9W	0.1W	± 1% of range	± 2% of range
1.000 - 9.999KW	0.001KW		
10.00 - 99.99KW	0.01KW		
100.0 - 999.9KW	0.1KW		
1000 - 9999KW	1KW		

AC Voltage
(50Hz or 60Hz, Auto Range, True RMS,Crest Factor<4, Input Impedance 10MV, VT (PT) = 1, Overload Protection AC 800V)

Range	Resolution	Accuracy of Readings
20.0V - 500.0V (Phase to Neutral)	0.1V	± 0.5% ± 5dgts
20.0V - 600.0V (Phase to Phase)		

Power Factor (PF)
Model : PHA-5850A (100A) & PHA-5850B (1000A)

Range	Resolution	Accuracy
0.00 - 1.00	0.01	± 0.04

Model : PHA-5850C (3000A) & PHA-5850D (1200A)

Range	Resolution	Accuracy	
		>20V & >30A	<20V or <30A
0.000 - 1.000	0.001	± 0.04	± 0.1

Testing for Energy Study & Audit

Power & Harmonics

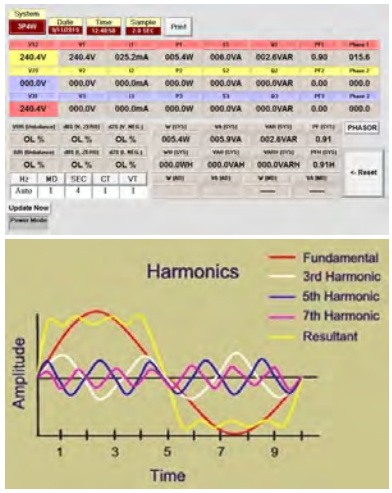

Harmonic Filter Panel

Data Logging

Ordering Information

Model : PHA 5850A = PHA 5850 + CT set A
Model : PHA 5850B = PHA 5850 + CT set B
Model : PHA 5850C = PHA 5850 + CT set C
Model : PHA 5850D = PHA 5850 + CT set D

Model : CT set A
3 pcs (R,Y,B) Clamp - On CTs
Conductor Size : 30mm (approx.)
Range : 1 / 10 / 100A

OR

Model : CT set B
3 pcs (R,Y,B) Clamp - On CTs
Conductor Size : 55mm (approx.) Busbar 64 x 24mm
Range : 10 / 100 / 1000A

OR

Model : CT set C
3 pcs Flexible CTs
Probe Length : 24" / 610mm (approx.)
Minimum bending Diameter : 35mm
Connector Diameter : 23mm
Cable Diameter : 14mm
Cable Length from Probe to Box : 1700mm
Cable Length from Box to Output : 1700mm
Range : 300 / 3000A

OR

Model : CT set D
3 pcs Flexible CTs
Probe Length : 18" / 460mm (approx.)
Minimum bending Diameter : 35mm
Connector Diameter : 23mm
Cable Diameter : 14mm
Cable Length from Probe to Box : 1700mm
Cable Length from Box to Output : 1700mm
Range : 120 / 1200A

AC Clamp-On Power & Harmonics Tester

CE

PHT 4545

Power Analysis

● W, KW, HP, VA, KVA, VAR, KVAR ● PF, Phase Angle (Φ) ● Energy (WH, KWH)
● Balanced 3Phase Power Quality ● 3Phase Sequence ● Programmable CT Ratio (1 to 250)
● Dual Displays (W + PF, VA + KVAR...) ● Active Power in HP
● Resistance and Continuity with Beeper

Harmonic Analysis

● True RMS value (V and A) at 0.5% basic accuracy ● 1500A AC ● Harmonic Analysis (V and A) to the 99th Order in % and in magnitude ● Better Understanding of High Frequency Harmonic Analysis (up to 5/6 KHz) ● Non-interrupted Harmonic Analysis ● Analysis of Total Harmonic Distortion (%THD-F) ● Analysis of Crest Factor (C.F.) ● Fast Peak Function (33m for 60Hz and 39n for 50Hz) ● Max, Min and Data Hold Function

General Specifications

Jaw Opening	: Cable Dia 55mm (approx.), 64 x 24mm (Bus Bar)
Battery Type	: 1.5V SUM-3 x 2
Display	: 4 + 4 Digits LCD
Auto-Power-Off	: 30 minutes
LCD Update Rate	: 2 times / sec.
Operating Temperature	: -10°C to 50°C
Storage Temperature	: -20°C to 60°C
Option	: Alligator Clips
Power Consumption	: 10mA (approx.)
No. of Samples / Period	: 512 (V & A), 256 (W)
Operating Humidity	: < 85% Relative
Storage Humidity	: < 75% Relative
Weight	: 650gms Including Battery (approx.)
Dimension	: 271 x 112 x 46mm (approx.)
Accessories	: Test Leads, Carry Bag, Users Manual, Batteries (Installed)

Specifications (23°C ± 5°C)

Harmonics of AC Current in % & Magnitude (1~99th order)

Range	Resolution in %	Accuracy in %	Resolution in Magnitude	Accuracy in Magnitude
1 ~ 20th	0.1%	±2%	0.1A	± 2% of reading ± 0.4A
21 ~ 49th		4% of reading ± 2.0%		± 4% of reading ± 0.4A
50 ~ 99th		6% of reading ± 2.0%		± 6% of reading ± 0.4A

Harmonics of AC Voltage in % & Magnitude (1~99th order)

Range	Resolution in %	Accuracy in %	Resolution in Magnitude	Accuracy in Magnitude
1 ~ 20th	0.1%	± 2%	0.1V	± 2% of reading ± 0.5V
21 ~ 49th		4% of reading ± 2.0%		± 4% of reading ± 0.5V
50 ~ 99th		6% of reading ± 2.0%		± 6% of reading ± 0.5V

Crest Factor (C.F., Accuracy of Readings)

Range	Resolution	Accuracy
1.00 ~ 99.99	0.01	± 5% ± 30 dgt

AC Watt (50 or 60Hz)

Range	Resolution	Accuracy
10.0 ~ 999.9W	0.1W	± 2% ± 20 dgt (>20V & >20A) ± 2% ± 40 dgt (<20V or <20A)
1.000 ~ 9.999KW	0.001KW	
10.00 ~ 99.99KW	0.01KW	
100.0 ~ 999.9KW	0.1KW	
1000 ~ 9999KW	1KW	

AC Current (50 or 60Hz, True RMS)

Range	Resolution	Accuracy
10.0 ~ 1500.0A	0.1A	± 2% ± 5 dgts

AC Voltage (50 or 60Hz, True RMS)

Range	Resolution	Accuracy
10.0 ~ 600.0V	0.1V	± 0.5% ± 5 dgts

Power Factor & Phase Angle

Range	Resolution	Accuracy
0.000 ~ 1.000	0.001	± 0.04
-180°to180° & 0°to360°	0.1°	± 2°

Total Harmonic Distortion (THD-F, 1 to 50th order)

Range	Resolution	Accuracy
0.0 ~ 20%	0.1%	± 2%
20.1 ~ 100%		± 6% of reading ± 1%
100.1 ~ 999.9%		±10% of reading ± 1%

Resistance(Ω) and Continuity (Beep if less than 50Ω)

Range	Resolution	Accuracy
* 7.0 ~ 999.9Ω	0.1Ω	± 5Ω
1000 ~ 1200Ω	1Ω	

* If reading is less than 7Ω it is displayed as 0Ω

Clamp-On TRMS Power Meter with Automatic Computation of 1φ and 3φ (3φ3W/3φ4W) Parameters

Preliminary Data

CE

3510PHW-AUTO

Features

- Check 3φ Phase Sequence
- 4 Digit LCD, 9999 Count, Autoranging
- Data Hold, Auto Power Off
- Dual Display KW+HP, KW+PF, KW+KVAR, KVA+φ, V+A, A+Hz, V+Hz
- Cable of Diameter upto 43mm / Busbar upto 65mm x 16mm

Applications

- 1φ & 3φ (3φ3w / 3φ4w) Power Analyzer
- Ideal for Electrical Audit of Heating, Ventilation & Aircon Systems (HVAC)
- Check Current drawn in Motors and Compressors
- Test Run / Start Capacitors
- Check for Energized Circuits & Balance Loads
- Capture Motor In-Rush Current Readings
- Determine Peak Power Demand Periods
- Analyze Temperature Data with the Aid of the Time Stamp
- Resistance upto 100MΩ
- Use MAX / MIN / REC in Temperature Mode to Assess Efficiency
- Evaluate Electrical Contacts
- Verify the Stability of Voltage
- Check Motor Run / Start Capacitor Values
- To Identify Low Voltage Control Signal
- To Identify Power Sources

1φ/3φ TRUE Power (KW) : (PF>0.5 or θ <60°) (1hp=0.7457KW)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
99.99KW	0.01KW	±(5% + 30)	600VAC/
600.0KW	0.1KW	(50, 60Hz)	1000AAC

1φ/3φ HP (1HP=745.7W) : (PF>0.5 or θ <60°)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
99.99HP	0.01HP	±(5% + 30)	600VAC/
800.0HP	0.1HP	(50, 60Hz)	1000AAC

1φ/3φ Apparent Power (KVA)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
99.99KVA	0.01KVA	±(2.5% + 30)	600VAC/
600.0KVA	0.1KVA		1000AAC

1φ & 3φ Reactive Power (KVAR) : (PF>0.5 or θ<60°)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
99.99KVAR	0.01KVAR	±(5% + 30dgts)	600V AC/
600.0KVAR	0.1KVAR	(50, 60Hz)	1000A AC

3φ Phase Sequence Indication

Range	Frequency Response	Overload Protection
80V to 480V	(50Hz / 60Hz)	600V

ACA Inrush Current

Range	Resolution	Sensitivity	Measurement Time	Overload Protection
99.99A	0.01A	>5A	100ms	1000A AC
999.9A	0.1A	>50A		

1φ / 3φ PF & Phase Angle (50Hz, 60Hz)

Range	Resolution	Accuracy	Sensitivity
-60°/0°/+60°	0.1°	± 6.0°	ACV>100V, ACA>10A
-0.5/1/+0.5			

Frequency

Range	Resolution	Accuracy ± (%rdg+dgts)	Sensitivity
40Hz/1KHz	0.1Hz	±(0.5% + 2)	ACV>1.2V, ACA>6A

AC Current (50Hz to 400Hz) : TRMS

Range	Resolution	Accuracy ± (%rdg+dgts)	Sensitivity	Overload Protection
99.99A	0.01A	±(2% + 30) (50,60Hz)	0.10A	1000A
999.9A	0.1A	±(4% + 30) (40-400Hz)	1.0A	

μA TRMS : (AC + DC) (Burden Voltage : 5mV/μA) (50Hz to 400Hz)

Range	Resolution	Accuracy ± (%rdg+dgts)	Sensitivity	Overload Protection
99.99μA	0.01μA	±(1% + 30)	0.20μA	600V
999.9μA	0.1μA		2.0μA	

AC Voltage (50Hz to 400Hz) : TRMS

Range	Resolution	Accuracy ± (%rdg+dgts)	Sensitivity	Overload Protection
999.9mV	0.1mV	±(1% + 30) (50, 60Hz) ±(2% + 30) (40-400Hz)	2.0mV	600V
9.999V	0.001V		0.020V	
99.99V	0.01V		0.20V	
600.0V	0.1V		2V	
Input Impedance : 3MΩ				

DC Voltage

Range	Resolution	Accuracy ± (%rdg+dgts)	Sensitivity	Overload Protection
999.9mV	0.1mV	±(1% + 30)	2.0mV	600V
9.999V	0.001V		0.020V	
99.99V	0.01V		0.20V	
600.0V	0.1V		2V	
Input Impedance : 3MΩ				

Resistance (Continuity < 40Ω on the 999.9Ω range)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
999.9Ω	0.1Ω	±(1% + 10)	600V
9.999KΩ	0.001KΩ		
99.99KΩ	0.01KΩ		
999.9KΩ	0.1KΩ		

MΩ (Auto Ranging)

Range	Resolution	Accuracy ± (%rdg+dgts)	Overload Protection
9.999MΩ	0.001MΩ	±(5% + 10)	600V
99.99MΩ	0.01MΩ		

Clamp-On TRMS Power Meter with Automatic Computation of 1φ and 3φ (3φ3W / 3φ4W) Parameters

Capacitance			
Range	**Resolution**	**Accuracy ± (%rdg+dgts)**	**Overload Protection**
10.000 µF	0.001µF	±(1.5% + 5)	600V
100.00 µF	0.01µF		
1000.0 µF	0.1µF		
7000 µF	1µF	±(2.5% + 15)	

Diode (Continuity < 40mV)			
Range	**Resolution**	**Accuracy ± (%rdg+dgts)**	**Overload Protection**
2.000V	0.001V	±(2% + 1)	600V

Temperature (K-Type Thermocouple)			
Range	**Resolution**	**Accuracy ± (%rdg+dgts)**	**Overload Protection**
-50°C to 900°C	0.1°C	±(2% + 1°C)	30VAC or 60VDC
-58°F to 1000°F	0.1°F	±(2% + 2°F)	

Note : TPK-B K Type Bead Probe (Upto 260°C) Supplied with the Meter

General Specifications

Numerical Dual Display : 4 Digit 9999 Count LCD
Low Battery Indication : [±] is displayed
Power Source : 9V Battery x 1
Battery Life : 32 hours approx.
Sampling Rate : 2.5 times/sec. (Digital Display)
1 times/6 sec. (on KW, KVA)
Operating Temperature and Humidity : 0°C to 50°C (32°F to 122°F)
RH < 80% non-condensing
Storage Temperature and Humidity : -10°C to 60°C (14°F to 140°F)
RH < 70% non-condensing
Dimensions : 247 x 90 x 40mm
Weight : 425gms Including Battery (approx.)
Jaw Opening : Cable Dia 43mm (max.) Bus Bar 16mm x 65mm
Accessories : Carrying Case, Battery (installed), One Alligator Clip, Test Leads, K Type Thermocouple (Upto 260°C), Instruction Manual
Auto Power off Time : Approx. 30 minutes
Temperature Coefficient : 0.1 x (specified accuracy) / °C
(<18 or>28°C, <64 or >82°F)

Usage

1φ 2W System

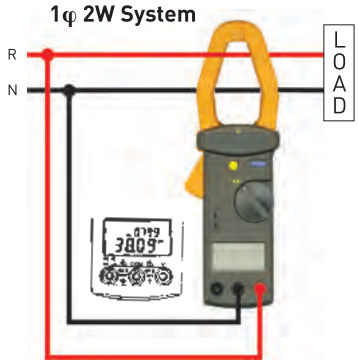

Press "RANGE" Key to Select KW+HP, KW+PF, KW+KVAR, KVA+θ or A+V

$$PF = \frac{KW}{KVA} = \cos\theta$$

HP = 746 watts
KVA = (V x A) / 1000
KVAR = KVA x Sinθ

3φ 3W System

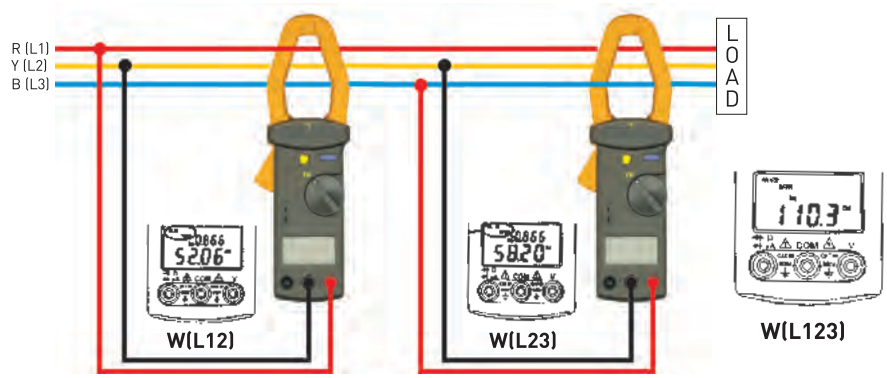

To read the details of individual data recorded, press "HOLD" key to select desired WL_{12}, WL_{23} or WL_{123} display. Then press "RANGE" key to select KW+HP, KW+PF, KW+KVAR, KVA+θ for (L_{12}, L_{23}) & KVA+PF for (L_{123}) or A+V

$$W_{3\Phi 3W} = W_{RY\,(L1L2)} + W_{BY\,(L3L2)}$$

$$KVA_{3\Phi 3W} = \sqrt{KW^2_{3\Phi 3W} + KVAR^2_{3\Phi 3W}}$$

$$PF_{3\Phi 3W} = \frac{KW_{3\Phi 3W}}{KVA_{3\Phi 3W}}$$

3φ 4W System

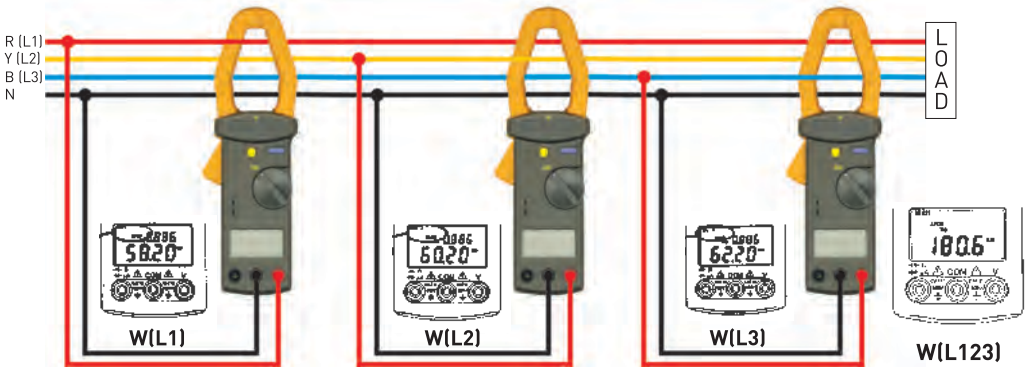

To read the details of individual data recorded, press "HOLD" key to select desired WL_1, WL_2, WL_3 or WL_{123} display. Then press "RANGE" key to select KW+HP, KW+PF, KW+KVAR, KVA+θ for (L_1, L_2, L_3) & KVA+PF for (L_{123}) or A+V

$$W_{3\Phi 4W} = W_{R\,(L1)} + W_{Y\,(L2)} + W_{B\,(L3)}$$

$$KVA_{3\Phi 4W} = \sqrt{KW^2_{3\Phi 4W} + KVAR^2_{3\Phi 4W}}$$

$$PF_{3\Phi 4W} = \frac{KW_{3\Phi 4W}}{KVA_{3\Phi 4W}}$$

3Φ Phase Sequence Indication

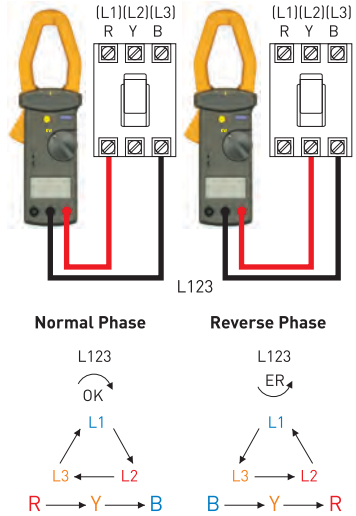

R:L1, Y:L2, B:L3

3φ / 1φ Clamp-On TRMS Power Meter for AC/DC Power Measurement

CE

4500

How one wished, one could measure 3φ power with a single clamp meter without any manual calculations; well now it is a reality. MECO 4500 Clamp-On Power Meter does this with absolute ease and reliability. Be it 3φ4W, 3φ3W, balanced or unbalanced system. Needless to add, it also works for 1φ2W and 1φ3W systems. Handy and ideal for on-site measurement, energy audit, data recording, Q.C. testing and maintenance of the entire plant.

Features

- 3φ4 W, 3φ3 W, 3φBalanced, 1φ2 W, 1φ3 W
- AC + DC 2000 KW (3φ), 1200 KW (1φ)
- Dual display KW + PF, KVA + KVAR, V + A, V + Hz, A + Hz
- Phase Angle Measurment (±90⁰), Phase Sequence Indication (R,S,T)
- AC 600V, DC 600V, AC + DC 2000A
- Power Factor
- AC/DC Auto Detection
- TRMS Values
- Memory of 4 records
- Auto Range

KVA + KVAR

V + Hz

Power Factor (PF) $PF = \frac{KW}{KVA}$

AC + DC KVA (Apparent Power) $KVA = \frac{V \times A}{1000}$

AC + DC KVAR (Reactive Power) $KVAR = \sqrt{(KVA)^2 - (KW)^2}$

General Specifications

Jaw Opening	Cable Dia. 55mm. (approx.) Bus Bar 65 (D) x 24 (W) mm
Battery Type	9V, Eveready type 216 or eq.
Display	2 x 4 Digits Dual Display LCD
Range Selection	Auto
Overload Indication	OL
Power Consumption	25mA (approx.)
Low Battery Indication	B
Sampling Time	0.5 sec. (V and A) 1.6 sec. (W)
Operating Temp.	4⁰ to 50⁰C
Operating Humidity	<85% RH
Storage Temperature	-20⁰C to 60⁰C
Storage Humidity	<75% RH
Dimensions	271 x 112 x 46 mm
Weight	650gms Battery Including (approx.)
Accessories	Carry Bag x 1, Users Manual x 1, Battery (Installed) x 1, Test Lead x 1 Pair

Electrical Specification (23⁰C ± 5⁰C)

AC+DC True Power (PF 0.2~1.0, 3φ3W, 3φ4W, 1φ2W, and 1φ3W)

Range	Resolution	Accuracy (of rdg)	Range
0~99.99KW	0.01KW	± 2.0% ± 0.05KW	AC 600V, DC 600V, ACA/DCA 2000A
100~999.9KW	0.1KW	± 2.0% ± 0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
1000~1200KW	1KW	± 2.0% ± 5KW	AC 600V, DC 600V, ACA/DCA 2000A

AC+DC True Power (Power Factor 0.2~1.0, 3 φ Balanced Power)

Range	Resolution	Accuracy (of rdg)	Range
0~99.99KW	0.01KW	±2.0%±0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
100~999.9KW	0.1KW	±2.0%±0.5KW	AC 600V, DC 600V, ACA/DCA 2000A
1000~2000KW	1KW	±2.0%±5KW	AC 600V, DC 600V, ACA/DCA 2000A

AC+DC Voltage (True RMS, Crest Factor<4, Autorange, Overload Protection 800VAC for all range)

Range	Resolution	Accuracy (of reading)		Input Impedance
		DC, 50/60 Hz	40 - 400 Hz	
0~200V	0.1V	±1.5% ±5 dgt	±2.0% ±5 dgt	10MΩ
200~500V	0.1V	±1.5% ±5 dgt	±2.0% ±5 dgt	
500~600V	1V	±1.5% ±5 dgt	±2.0% ±5 dgt	

AC+DC Current (True RMS, Crest Factor <4)

Range	Resolution	Accuracy (of reading)		Overload Protection
		DC, 50/60 Hz	40-400 Hz	
0~200A	0.1A	± 1.5% ± 5 dgt	± 2.0% ± 5 dgt	AC 3000A
200~500A	0.1A	± 2.0% ± 5 dgt	± 2.5% ± 5 dgt	AC 3000A
500~2000A	1A	± 2.5% ± 5 dgt	± 3.0% ± 5 dgt	AC 3000A

Phase Angle (Must zero the current reading before measurement)

Range	Accuracy	Sensitivity	Remark
-90⁰ to + 90⁰ (50/60 Hz)	± 2.0⁰	V> 100V, A> 10A	Zero Crossing Detection

* If current signal is not detected, the phase angle will be left blank in LCD.

Frequency (if <10 Hz, Hz = 0)

Range	Accuracy	Sensitivity
50/60 Hz	± 2dgts	V > 1V, A > 5A
10-400 Hz	± 0.5% ± 2dgt	V > 1V, A > 5A

MECO®

SINCE 1962

BEST CALIBRATING EQUIPMENT AWARD

• Calibrating Equipment
• Clamp - On CT's
• Decade Resistance Box

Reliable, Long-Lasting and Affordable Instruments ...since 1962 !

MECO INSTRUMENTS PRIVATE LTD.

NAVI MUMBAI

ISO 9001-2015 Certified Company

www.mecoinst.com

Calibrating Equipment - Selection Guide

90A

90DQ

90P

FEATURES / PARAMETERS		90A	90DQ	90P
DISPLAY	5½ Digit Display	✓	✓	✓
SYSTEM (1 PHASE)	DC	✓	✓	-
	AC	✓	✓	✓
VOLTAGE (V)	AC/DC V : (0 - 200mV to 1000V)	✓	-	-
	AC/DC V : (0 - 250mV to 1000V)	-	✓	-
	AC V : (0 - 1V to 1000V)	-	-	✓
CURRENT (A)	AC/DC A : (0 - 100µA to 20A)	✓	-	-
	AC/DC A : (0 - 100µA to 50A)	-	✓	-
	AC A : (0 - 10mA to 100A)	-	-	✓
FREQUENCY (Hz)	SYNCH	-	✓	-
	50 Hz	✓	✓	-
	60 Hz	✓	✓	-
	400 Hz	✓	✓	-
	1 KHz	-	✓	-
	40 Hz to 70 Hz	-	-	✓
RESISTANCE	10Ω to 24k x 1kΩ	✓	✓	-
PHASE ANGLE	0 to 359.99°	-	-	✓
POWER (1 PHASE)	Range : 0 to 100kW	-	-	✓
POWER FACTOR	Range : -1 to +1	-	-	✓
COMMUNICATION PORT	RS232	✓	✓	✓
KEY ADJUSTOR		✓	✓	✓
WORKS CALIBRATION CERTIFICATE TRACEABLE TO NPL		✓	✓	✓
STANDARD CURRENT COIL (OPTIONAL)	Input 5A (Max.), Turn Ratio 100 / 1	-	✓	✓
	Input 10A (Max.), Turn Ratio 100 / 1	-	✓	✓
	Input 20A (Max.), Turn Ratio 50 / 1	✓	-	-

Applications

- R & D Labs
- NABL Labs
- Educational Institutes
- Paper & Pulp Industires
- Automobile Industries
- Textile Industries
- Calibration Labs
- Chemical Process Industries
- Cement Plants
- Instrument Manufacturing Companies
- Medical Industries
- Petrochemical Industries



Voltmeter

Ammeter

Wattmeter Varmeter

PF Meter

Hz Meter

Multifunction Meter

Transducer

Multimeter

Clamp Meter

Universal Calibrator

RS 232

90A

Key Adjuster

MODEL 90A Universal Calibrator gives a standard output for AC Voltage, DC Voltage, AC Current & DC Current. Keys or Knob help to adjust the magnitude of the output signals. Important features include wide range, high accuracy, good stabilization, easy operation and portability. The Calibrator is ideal for testing ammeters and voltmeters upto 0.2 accuracy class.

Applications

- Calibration of AC Volt, Amp, Frequency Meters
- Calibration of DC Volt, Amp Meters
- Calibration of Resistance Meters, Clamp Meters, Multimeters

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 2 x Fuse (2A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil

Turns Ratio	50 / 1
Input Max.	20A
Current	1000A
Clamp Jaw	> 28mm
DC Impedance	0.9 Ω
DC Burden	20A / 1.3V
AC Burden	20A / 3V
Frequencies	DC to 60Hz
Accuracy	± 0.3% rdg

Technical Specifications

Voltage Control	Output Voltage Range : Basic Error :	200mV, 1V, 2V, 5V, 10V, 20V, 50V, 100V, 200V, 500V, 1000V DCV : ± (0.03 %RD + 0.02 %FS) ACV : ± (0.05 %RD + 0.03 %FS)
Current Control	Output Current Range : Basic Error :	100µA, 500µA, 2mA, 5mA, 20mA, 50mA, 200mA, 500mA, 2A, 5A, 20A DCI : ± (0.05 %RD + 0.02 %FS) ACI : ± (0.07 %RD + 0.03 %FS)
Frequency Control	Frequency Range : Frequency Error :	50Hz, 60Hz, 400Hz < 1 %
Resistance Control	Resistance Range : Basic Error :	10, 24, 50, 100, 240, 500 (Ω), 1, 2.4, 5, 10, 24 (kΩ), 10x1k, 24x1k, 50x1k, 100x1k, 240x1k, 500x1k, 1kx1k, 2.4kx1k, 5kx1k, 10kx1k, 24kx1k ± 0.2 % +20mΩ

Note - RD : Reading, FS : Full Scale

General Specifications

- Stability DC : < 0.01 %FS / 2 min, AC : < 0.03 %FS / 2 min
- Ripple : < 0.1 %
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 180 VA
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ⩽ 80 %
- Distortion : < 0.5 %
- Display : 5½ Digit LED Digital Display
- Step adjustment of Output Signal : 10 %FS, 1 %FS, 0.1 %FS, 0.05 %FS
- Dimensions : 147 x 480 x 480mm (approx.)
- Total Weight : 17 kgs (approx.)

Multifunctional Calibrator

RS 232

90DQ

Key Adjustor

MODEL 90DQ Multifunctional calibrator can output standard AC voltage, DC voltage, AC current & DC current. Output actual value, percent and FS display at the same time. Calibrator may select FS (full scale) and relevant step in according with scale of UUT (unit under test). Keys or knobs adjust magnitude of the output signals. Wide range, high accuracy, good stabilization, easy operation and portable. The calibrator applies to test amperemeter and voltmeter upto 0.2 class.

Applications

- Calibration of AC Volt, Amp, Frequency Meters
- Calibration of DC Volt, Amp Meters
- Calibration of Resistance Meters, Clamp & Multi Meters

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 1 x Pair of Output Leads (50A)
- 2 x Fuse (4A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil

Turns Ratio	100 / 1	100 / 1
Input Max.	**5A**	**10A**
Current	**500A**	**1000A**
Clamp Jaw	> 20mm	> 28mm
DC Impedance	0.7Ω	0.9Ω
DC Burden	5A / 3.5V	10A / 2.5V
AC Burden	5A / 6V	10A / 5V
Frequencies	DC to 60Hz	DC to 60Hz
Accuracy	± 0.3% rdg	± 0.3% rdg

Technical Specifications

Voltage Control	Output Voltage Range : Basic Error :	250mV, 1V, 2.5V, 5V, 10V, 25V, 50V, 100V, 250V, 500V, 1000V DCV : ± (0.02 %RD + 0.01 %FS) ACV : ± (0.05 %RD + 0.02 %FS)
Current Control	Output Current Range : Basic Error :	100µA, 500µA, 2.5mA, 10mA, 25mA, 100mA, 250mA, 1A, 2.5A, 10A, 50A DCI : ± (0.03 %RD + 0.02 %FS) ACI : ± (0.05 %RD + 0.03 %FS)
Frequency Control	Frequency Range : Frequency Error :	50Hz, 60Hz, 400Hz, 1kHz < 0.1 %
Resistance Control	Resistance Range : Basic Error :	10, 24, 50, 100, 240, 500 (Ω), 1, 2.4, 5, 10, 24 (kΩ), 10x1k, 24x1k, 50x1k, 100x1k, 240x1k, 500x1k, 1kx1k, 2.4kx1k, 5kx1k, 10kx1k, 24kx1k ± 0.2 % +20mΩ

General Specifications

Note - RD : Reading, FS : Full Scale

- Stability DC : < 0.01 %FS / 3 min, AC : < 0.02 %FS / 3 min
- Ripple : < 0.2 %
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 250 VA
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ⩽80 %
- Distortion : < 0.5 %
- Display : 5½ Digit LED Digital Display
- Step adjustment of Output Signal : 100 %FS / N, 10 %FS / N, 1 %FS / N, 0.1 %FS / N (N = 4, 5, 6, 10 and 15)
- Dimensions : 190 x 480 x 545mm (approx.)
- Total Weight : 22.5 kgs (approx.)

AC Multifunctional Calibrator

RS 232

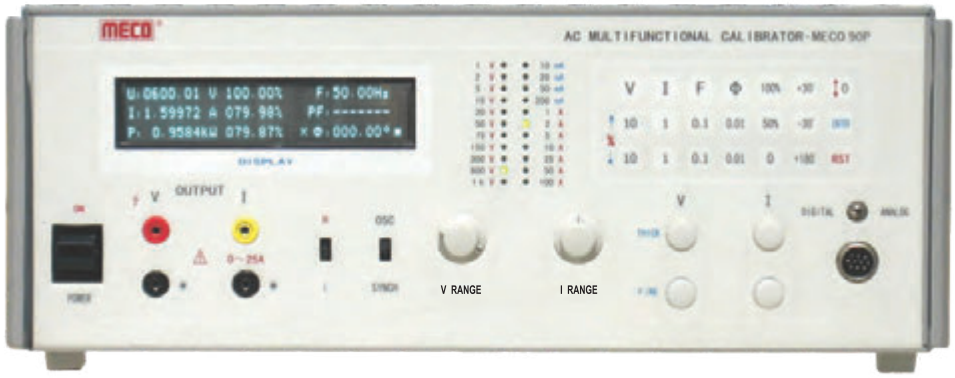

90P

Key Adjustor

MODEL 90P AC multifunctional calibrator can output standard AC voltage and AC current. It measures AC Voltage, AC current, power, phase angle, Power factor and frequency (40Hz ~ 70Hz). Wide output range of current and voltage; High reliability and low wave distortion.

Applications

- Calibration of Power Meters, AC Volt, Amp, Watt, Var, Frequency, Powerfactor, Phase Angle and Energy Meters.
- Calibration of Voltage, Current, Active & Reactive Power, Frequency, Powerfactor, Phase angle and Energy Transducers.

Standard Accessories

- 1 x Key Adjuster
- 1 x Power Cord
- 1 x Pair of Output Leads
- 1 x Pair of Output Leads (50A / 100A)
- 2 x Fuse (4A)
- 1 x Data Cable for PC Connectivity
- 1 x Operation Manual

Optional Accessories

- Standard Current Coil

Turns Ratio	100 / 1	100 / 1
Input Max.	5A	10A
Current	500A	1000A
Clamp Jaw	> 20mm	> 28mm
DC Impedance	0.7Ω	0.9Ω
DC Burden	5A / 3.5V	10A / 2.5V
AC Burden	5A / 6V	10A / 5V
Frequencies	DC to 60Hz	DC to 60Hz
Accuracy	± 0.3% rdg	± 0.3% rdg

Technical Specifications

Voltage Control	Output Voltage Range :	1V, 2V, 5V, 10V, 20V, 50V, 75V, 150V, 300V, 600V, 1000V
	Min. Resolution :	0.02mV
	Basic Error :	AC V : ± (0.03 %RD + 0.02 %FS)
Current Control	Output Current Range :	10mA, 20mA, 50mA, 200mA, 1A, 2A, 5A, 10A, 25A, 50A, 100A
	Min. Resolution :	0.2μA
	Basic Error :	AC I : ± (0.03 %RD + 0.02 %FS)
Frequency Control	Frequency Range :	40Hz to 70Hz
	Frequency Error :	± 0.02 Hz
Phase Control	Phase Angle Range :	0 to 359.99°
	Phase Error :	± 0.05°

Note - RD : Reading, FS : Full Scale

General Specifications

- Power Range : 0 to 100kW
- Power Basic Error : ± (0.07 %RD + 0.03 %FS)
- Stability V, I : < 0.01 %FS / 2 min, P : < 0.02 %FS / 2 min
- Distortion : < 0.5 %
- Power Factor Range : -1 to +1
- Power Factor Basic Error : ± 0.001 (PF 0 to ±0.8); ±0.0005 (PF -0.8 to -1, +0.8 to +1)
- Power Supply : 230 VAC, 50 (60) Hz
- Power Consumption : < 300 VA
- Display : 5½ Digit VFD Digital Display
- Operating Temperature : 5°C to 35°C
- Relative Humidity : ≤80 %
- Dimensions : 192 x 480 x 540mm (approx.)
- Total Weight : 23 kgs (approx.)

Multifunction Process Calibrator

CE

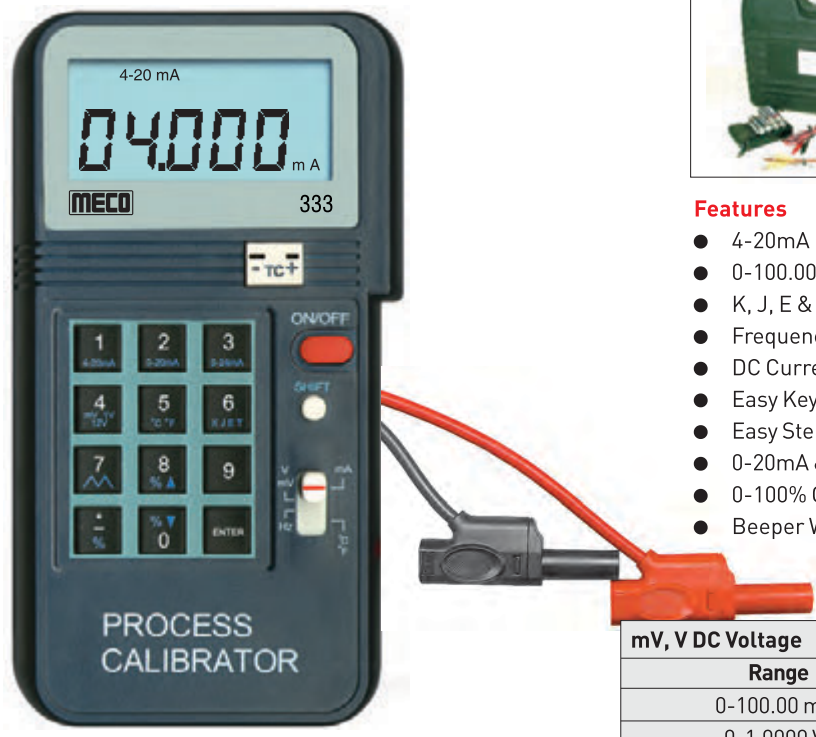

333

Features

- 4-20mA (1KΩ Load, 24V Loop Supply)with 1μA Resolution
- 0-100.00mV, 0-1.0000V, 0-12.000V
- K, J, E & T Thermocouples (^{0}C and ^{0}F)
- Frequency : 1-62500 Hz
- DC Current Basic Accuracy : 0.025%
- Easy Key Pad Number Operation
- Easy Step and Auto Ramp Functions
- 0-20mA & 0-24mA Selectable
- 0-100% Output (mA, mV, V)
- Beeper Warning when Output is Open (mA) or Short (mV, V)

Electrical Specifications (23^{0}C ± 5^{0}C, 10 minutes after power is on)

mA DC Current (1KΩ max. Load, 24V Loop Supply)

Range	Resolution	Accuracy
4-20 mA, 0-20 mA, 0-24 mA	1 μA	± 0.025%rdg ± 3μA

Beeper Warning when Output is Open and specified Current Output >1mA

mV, V DC Voltage (1mA Supply Current)

Range	Resolution	Accuracy
0-100.00 mV	10 μV	± 0.05%rdg ± 30μV
0-1.0000 V	100 μV	± 0.05%rdg ± 300μV
0-12.000 V	1 mV	± 0.05%rdg ± 3mV

Beeper Warning when Output is short and specified Voltage Output >10mV

Frequency (1KΩ Load Min.)

Range	Resolution	Accuracy
1-125 Hz	1 Hz	± 0.04 Hz
126-62500 Hz	1 Hz	± 0.01% ± 0.04 Hz

K, J, E and T Type Thermocouples (1^{0}C, 1^{0}F Resolution, 1KΩ Load Min.)

Range	Accuracy	Range	Accuracy
K : -200 to -100^{0}C	± 2.0^{0}C	K : -328 to -148^{0}F	± 3.6^{0}F
K : -100 to 0^{0}C	± 1.1^{0}C	K : -148 to 32^{0}F	± 1.8^{0}F
K : 0 to 1370^{0}C	± 0.8^{0}C	K : 32 to 2400^{0}F	± 1.5^{0}F
J : -100 to 0^{0}C	± 0.9^{0}C	J : -148 to 32^{0}F	± 1.6^{0}F
J : 0 to 760^{0}C	± 0.7^{0}C	J : 32 to 1400^{0}F	± 1.2^{0}F
E : -100 to 0^{0}C	± 0.9^{0}C	E : -148 to 32^{0}F	± 1.6^{0}F
E : 0 to 700^{0}C	± 0.7^{0}C	E : 32 to 1292^{0}F	± 1.2^{0}F
T : -200 to 0^{0}C	± 1.0^{0}C	T : -328 to 32^{0}F	± 1.8^{0}F
T : 0 to 400^{0}C	± 0.8^{0}C	T : 32 to 752^{0}F	± 1.5^{0}F

General Specifications

Battery Type	9V Eveready Type 216 or Equivalent & External Battery Pack (6 x 1.5V AA Batteries)
Display	4 and 5 Digits LCD Display with Annunciator
Operating Environment	0^0 to 50^{0}C (32 to 122 ^{0}F), RH <85%
Storage Environment	-20^{0}C to 60^{0}C (-4 to 140^{0}F), RH <85%
Dimensions	88 x 168 x 38 mm (approx.)
Weight	330gms Including Battery (approx.)
Accessories	Carrying Case x 1, Users Manual x 1, K type Thermocouple Connector x 1, External Battery Pack Holder 1.5V AA Batteries x 6, 9V Battery, Pair of Alligator Test Leads x 1

High Voltage Resistance Box

new

Preliminary Data

CE

90DR

90DR45D

Parameters	Specifications
Resistance Range	0.01MΩ ~ 5GΩ
17 Selectable Fixed Resistance Values	0.01MΩ, 0.05MΩ, 0.1MΩ, 0.2MΩ, 0.5MΩ, 1MΩ, 2MΩ, 5MΩ, 10MΩ, 20MΩ, 50MΩ, 100MΩ, 200MΩ, 500MΩ, 1kMΩ, 2kMΩ, 5kMΩ
Accuracy	±0.2%, ±0.2%a, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.5%, ±0.5%, ±0.5%, ±1%, ±1%, ±1%, ±2%, ±2%, ±2% (respectively)
Voltage Range (DC)	100V, 200V, 300V, 400V, 500V, 1kV, 1kV, 1kV, 1kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV, 2.5kV (respectively)
Insulation Resistance between Circuit and Housing	>500GΩ
Maximum With Stand Voltage Between Circuit and Housing	2000V AC For <60 Seconds
Working Temperature	20 ± 5°C (Typical), 20 ± 5°C (Reference))
Storage Temperature	-10 ~ 40°C, ≤ 75% RH
Humidity	25% ~ 75% (Typical), 30% ~ 60% (Reference)
Dimension	310 x 240 x 160mm (approx.)
Weight	3.6Kg (approx.)
Applications	● Checking of HV Insulation Testers ● Research Laboratories ● Factories ● School & Institute ● Accreditation Laboratories ● Certification Agencies

Parameters	Specifications
Display	4½ Digit Display
Resistance Range	0 ~ 211.1111110GΩ
10 Adjustable Potentiometric Resistance	$x10^2$, $x10^3$, $x10^4$, $x10^5$, $x10^6$, $x10^7$ $x10^8$, $x10^9$, $x10^{10}$, $x10^{11}$
Accuracy	±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.2%, ±0.5%, ±1%, ±2%, ±5%, ±10% (respectively)
Current / Voltage Value of Each Resistance	50mA, 20mA, 10mA, 2mA, 1000V, 2500V, 5000V, 5000V, 5000V (respectively)
Voltage Range	0 ~ 1999.9V ~ 5000V (RMS / V_{PP})
Accuracy	±(1% rdg +2digits)
Input Impedance	10GΩ ± 10%
Insulation Resistance between Circuit and Housing	1TΩ
Maximum With Stand Voltage Between Circuit and Housing	10000V AC(RMS) For <60 Seconds
Working Temperature and Humidity	20 ± 5°C, ≤ 65% RH
Storage Temperature and Humidity	-10 ~ 55°C, ≤ 80% RH
Dimension	520 x 285 x 180 mm (approx.)
Power Supply	6F22 (9V) x 1Pc.
Weight	5.3Kg (approx.)
Applications	● Checking of HV Insulation Testers ● Research Laboratories ● Factories ● School & Institute ● Accreditation Laboratories ● Certification Agencies

Clamp - On CT's & Flexible AC Current Probe

CE

M1

S

Model M1	
Transformer ratio (Arms)	100 A/1A
Rated burden	1W
Maximum load	2W
Overload (Arms)	120% continuous,150% for 5 min/ h
Weight	100 gm approx.
Colours	Red, Yellow, Blue
Dimensions	97 x 46 x 27 mm.
Jaw opening	Cable Dia 15 mm max.
Accuracies	
for 50 Hz	±2% of rdg. for 5A to 10A ±1% of rdg. for 10A to 150A
for 2000Hz	±1% of rdg. for 100A
for 50A	±2% from 30Hz to 10000Hz
for phase	from 1^0 to 2.5^0
Connections	Safety sockets for banana plugs ø 4mm

Model S	
Transformer ratio (Arms)	200/5A, 500/5A, 1000/5A (Single Range) 100, 500, 1000/5A (Triple Range)
Overload (Arms)	120% continuous, 200% for 5 min/h
Weight	535 gm approx.
Colours	Red, Yellow, Blue
Dimensions	217 x 109 x 40 mm.
Jaw Opening	Cable Dia 53 mm max.
Bus bar	51 x 12mm
Accuracies	
for 30Hz to 5000Hz	Class 2 for Rated Burden 0.8W
for 45Hz to 1000Hz	Class 1 for Rated Burden 0.4W
for 50Hz to 400Hz	Class 0.5 for Rated Burden 0.2W
Connections	Safety Sockets for Banana Plugs ø 4mm

Note : Clamps with specifications other than above available subject to technical specifications.
Caution : The current probe secondary should never be open-circuited. Otherwise, lethal voltages will be developed and the probe will be damaged. Always complete the secondary connection firmly before clipping on the probe to the circuit. For disconnection, reverse the sequence. For power measurements, ensure the correct P1, P2 and S1, S2 polarities as indicated by the arrows on the Probe.

FCT Series

Model FCT Series

MECO FCT is a Flexible Current Transformer based on the Rogowski principle. It is suitable to conveniently measure Single / Three Phase AC and Pulsed DC Currents. After approximate signal conditioning, it can be used with Digital Multimeters, Recorders and other suitable equipment to measure current from very low frequencies up to 1MHz.

The probes comprises of a flexible air-cored sensor which can be opened and installed around a primary conductor without interrupting the circuit. The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas and over large conductors. Inner Diameter / Window Size and leads can be customized.

Specification

Typical Voltage Output VoRMS (Sinusoidal Current)	$(2.183 \times 10^{-6}) \times$ IRMS x Frequency
VoRMS (at 3000ARMS, 50 Hz)	300mV AC
Rated Current (RMS)	3000A
Inner Diameter / Window Size	100mm (5")
Coil Diameter	9 mm
Internal Resistance per Probe	120Ω
Operating Temperature Range	-10°C to + 60°C
Storage Temperature Range	-20°C to + 70°C

Bandwidth	5Hz ~1MHz
Accuracy	± 0.2%(Most accurate position, 25°C)
Phase Shift	90 ± 0.2 degrees
Temperature Sensitivity	0.08% per °C
Position Sensitivity	± 0.5%
Working Voltage	1000V AC RMS
Colour	Red, Yellow, Blue and Black

Ordering Information : Model, Rated Input (A AC) & Rated Output

Clamp - On AC Current Transformer

CCT50

CCT602

MECO CCT Series of Clamp-On Current Transformer's are designed for fast and easy installation. Clamp-On Current Transformer uses Permalloy Magnetic Core or Silicon Amorphous Core, with characteristics of small size, high precision, good stability and strong anti-interference ability.These sensor's give a standard AC Current output which is suitable to conveniently measure on Single Phase / Three Phase Circuits with good stability and high anti-interference ability. It is ideal for power and energy measurement with high precision and small phase angle error in applications related to electric power, communication, monitoring and control. It can measure a variety of electric parameters without removing cables.The Standard length of Output Leads is 2 Meter. However Output and Leads Cable can be customized.

Features

- Clamp-On Design, Safe, Easy to Install, Portable.
- Wide Inner Window, Allowing Clamping of Big Cables or Bus-Bars.
- Silicon Steel / Permalloy Core
- Operating Temperature -25°C to 75°C
- Operating Humidity < 85%
- Output Connection UL1015 22AWG Wire (Twisted Wire) 2m

Applications

- Current Measurement, Monitoring and Protection for Electrical Wiring and Equipment.
- Current and Power Measurement for Electric Motors, Lighting, Air Compressor, Heating and Ventilation System, Air-Condition Equipment and Automation-Control System.
- Current, Power and Energy Monitoring Device.

Electrical Specifications

Frequency	50 - 400Hz
Rated Input	As Below
Measuring Range	5% In - 130% In
Rated Output	0 - 5A AC (Standard)
	0 -1A AC or 0-10V AC (Optional)
Ratio	≤ ± 0.1 %
Phase Angle	≤ ± 10min
Dielectric Strength	3.0KV / 1mA / 1min
Insulation Resistance	DC500V / 100MΩ min

Specification

Model	Rated Input (A AC)	Rated Output	Accuracy	Window Size (mm) (ID)
CCT50	0 - 100A	5A AC	1.0	50
	0 - 500A			
	0 - 1000A			
CCT602	0 ~ 2000A			60

Ordering Information : Model, Rated Input (A AC) & Rated Output

24 DEC 2015

ACCOLADE ELECTRONICS PVT. LTD.

To,

21st December 2015.

MECO METERS PRIVATE LTD.

Plot No. EL-60, MIDC Electronic Zone, TTC Industrial Area, Mahape, Navi Mumbai 400710, INDIA

Subject: Customer appreciation letter.

Dear Sir,

As one of your customers, we purchased a Universal Calibrator-90P from your company. We wanted to say thank you for the assistance you gave us in purchasing the product and training to our Technical Team. We can say that we are greatly satisfied with the Universal **Calibrator-90P** which we bought from your company.

Again, we wanted to let you know that we greatly appreciate the effort of your company especially your personal attention & your great customer service.

Thanking you,

Deepak Jagadale

Director

Accolade Electronics Pvt. Ltd.

Pune

Reg. Office : 19-20, Fly View, Near Fly Over, Wanje, Pune - 411 058 (India).
Works : Ghare Complex, S. No. 78/1, Dangat Industrial Estate, Shivne, Pune - 411 023.

ACCUTECH
Calibration & Instrument solution

- Calibration of Electro-Technical, Thermal, Mechanical & Flow Instruments / Equipment.
- Industrial Process Control Instruments Manufacture & Repairing.

Shop No. A-31, Sagar Complex, Nashik Phata, Opp. Kasarwadi Rly. Station, Kasarwadi, Pune-411034.
Contact :+91- 9960162504.
E-mail : service.acis@gmail.com

APPRECIATION LETTER

16th-Dec-2015.

To Whomsoever It May Concern

We Have Purchased the Universal Calibrator Model No.90A From **Meco Instruments Pvt. Ltd.** Mahape Navi Mumbai. The performance of the Instrument during calibration from IDEMI Mumbai was found within claimed accuracy from Meco.

The Instrument is user friendly. We are thanking to Meco Instruments to Support us for growing our calibration Laboratories.

We hope to have similar support from your organization in future also. So it will strengthen our business relations.

For :-
Accutech Calibration & Instrument Solution.

Name: Sainath Rawa
Managing Partner

Anandha Jothi Industries

Manufacturers of Testing Equipments for Power Generation / Transmission & Distribution Systems

ISO 9001:2008 CERTIFIED UNIT

20 May 2013

To,
MECO INSTRUMENTS PRIVATE LTD.
Navi Mumbai.

Sub: Performance of MECO Multifunctional Calibrator Model 90DQ.

Ref: Purchase Order No.1080 AJI / 2010 -2011 Date: 27.12.2010.

Dear Sir/Madam,

We take pleasure in informing you that **MECO Multifunctional Calibrator Model 90DQ** supplied to us is working satisfactorily since the past 4 years.

We are using **MECO Multifunctional Calibrator Model 90DQ** for the Calibration of different type of Clamp Meters, Multi Meters & Panel Meters.

The Calibrator is found to be stable and reliable and we have pleasure in recommending the same to others.

Thank you again for your service and we will look forward to continuing our relationship in the future.

With Best Regards,
Mr. MAHENDRAN
For ANANDHA JOTHI INDUSTRIES

Proprietor
ANANDHA JOTHAI INDUSTRIES, CHENNAI

No. 3/3, Viswanathan 3rd cross street, Karampakkam, Porur, Chennai – 600 116.
Mobile: +91 - 9444021461, Phone: +91 - 44 - 65272380, Tel. Fax. +91 - 44 – 2476335
www. anandhajothi. com E mail : ajichennai@gmail.com

---

17 DEC 2016

SHTC

SANKALP HI-TECH CORPORATION

(Calibration, Repair & Sales of Precision Measuring and Process Control Equipment)

Date: 15th DEC, 2015

To,
Meco Meters Pvt. Ltd,
Plot No. EL-60, MIDC Electronic Zone
TTC Industrial Area, Mahape,
Navi Mumbai – 400 710.
Phone : +91 22-27673310

Subject : Performance of Meco Universal Calibrator Model : 90A.

Ref: Purchase order no. 01/15-16 Dated : 25/04/2015

Dear Sir/Madam,

We take pleasure in informing you that **Meco Universal Calibrator Model 90A** supplied to us is working satisfactory since the past 6 months.

We are using the calibrator for Calibration of Ammeter, Voltmeter, Multimeter, Clampmeters etc.

The Calibrator is found to be stable and reliable and we have pleasure in recommending the same to others.

Thank you again for your service and we will look forward to continuing our relationship in the future.

With Best Regards,

FOR SANKALP HI-TECH CORPORATION

Proprietor

REGD. OFF. & LABORATORY :
7/3, "RAMSETU" RAMKRISHNA NAGAR, BEHIND ABV TRADE LINK,
AMBAD-SATPUR LINK ROAD, AMBAD, NASHIK-422 010. TELEFAX : 0253-2387965

Factory Tour

Welcome to MECO - Mahape

Sales & Marketing Department

Product Display Gallery

Store & Material Handling

Quality Control

SMT & Reflow Machine

Meter Assembly Line

Conveyor Belt Production Line

World Class Calibrating Equipment

Factory Automation

Enviromental & Burn-In Chambers

Vibration Test

Outgoing QC

Training & Seminars

Awards

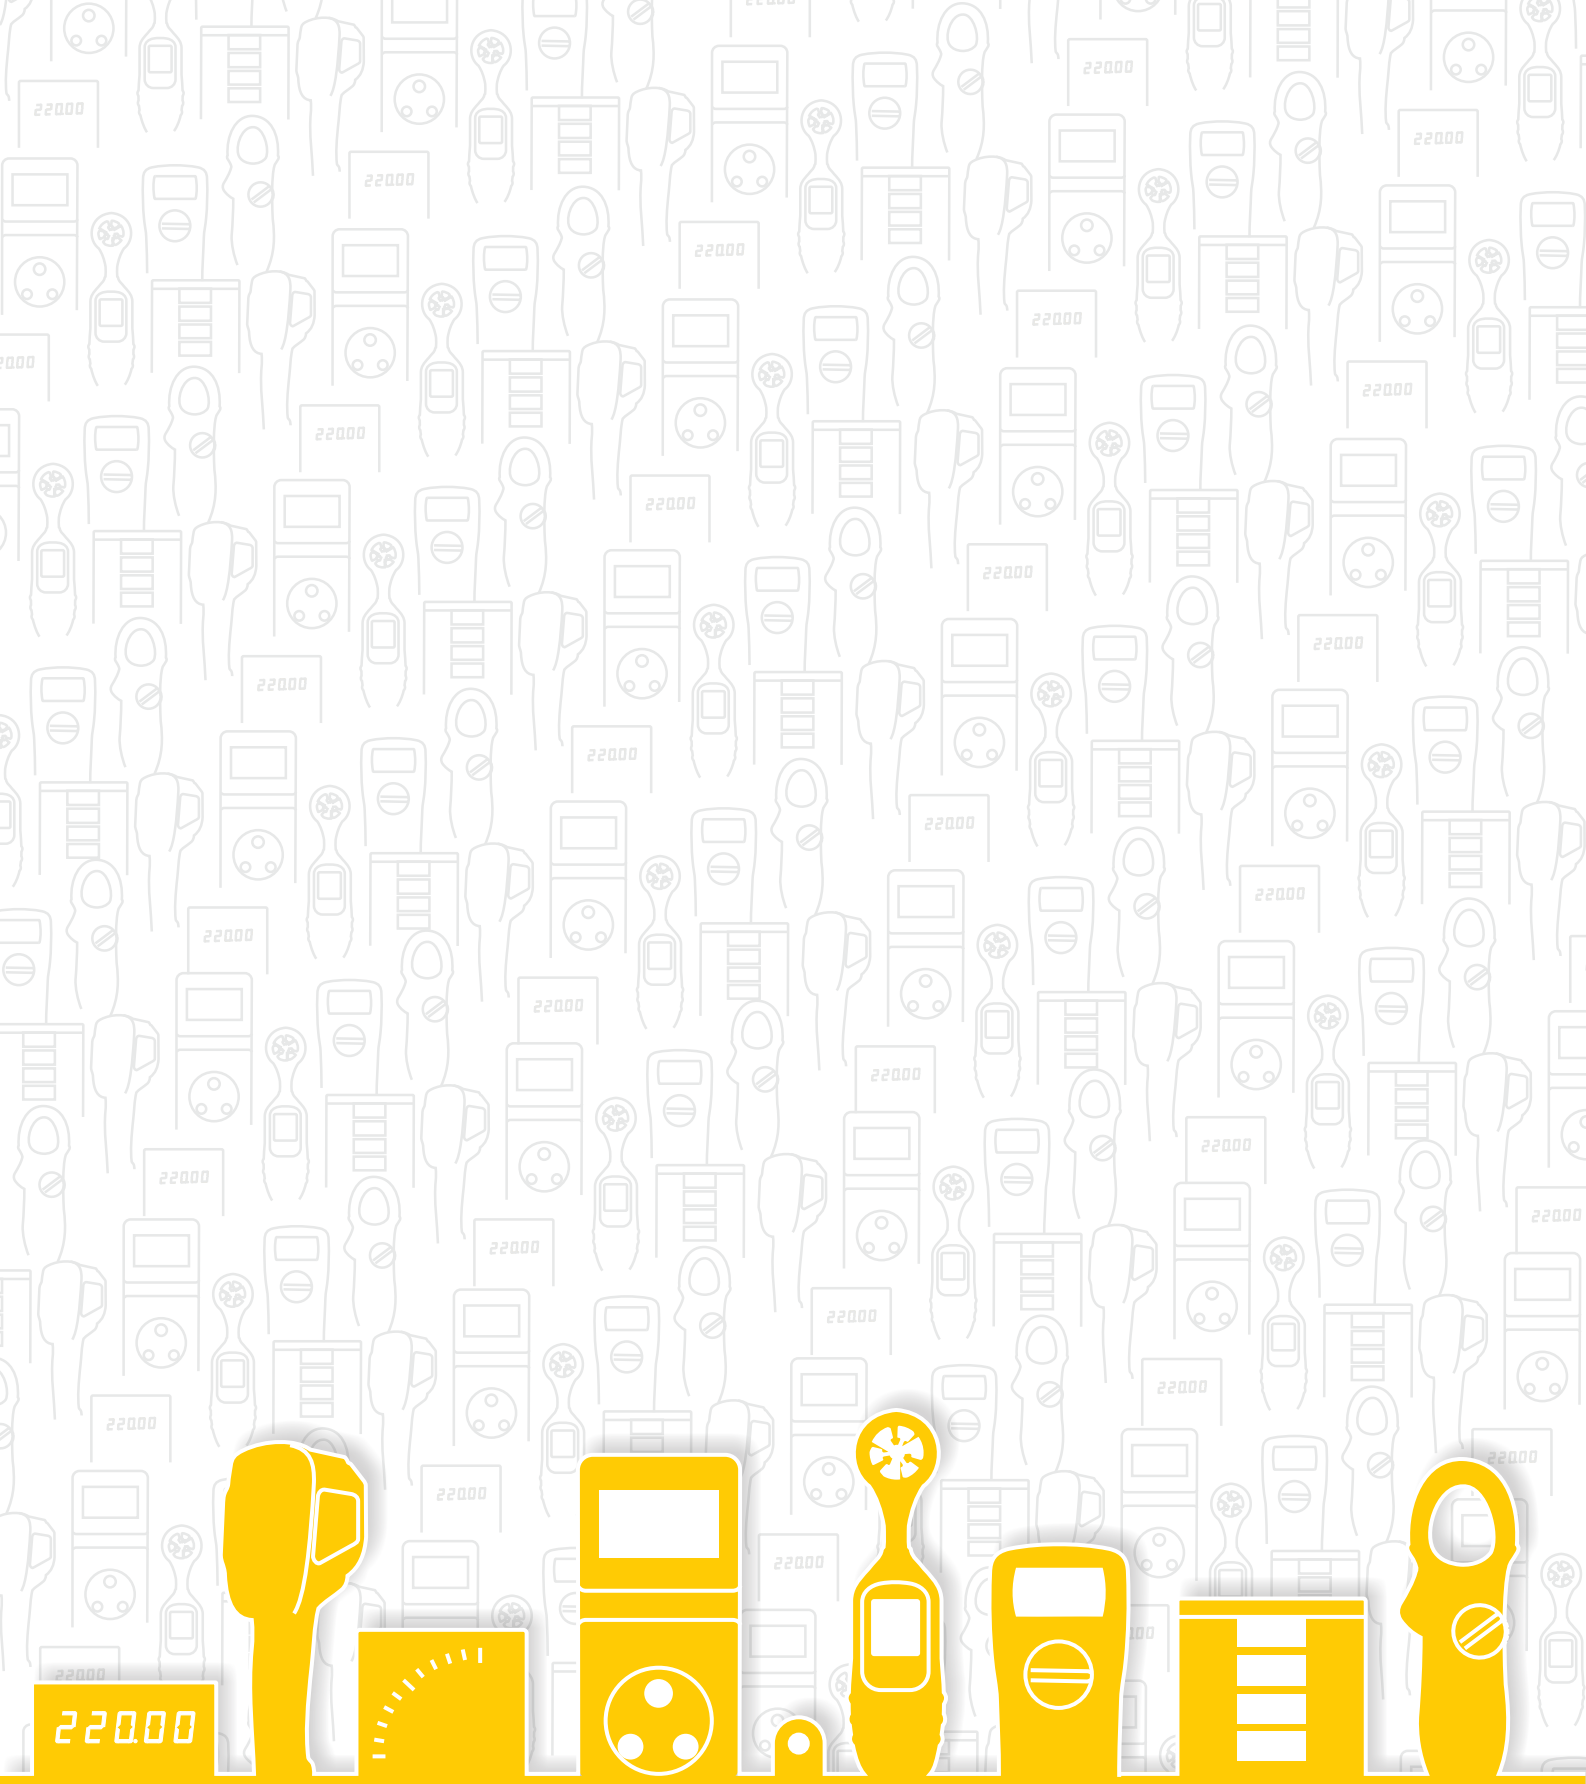

ISO 9001-2015 Certified Company

MECO INSTRUMENTS PRIVATE LTD.
EL-1, MIDC Electronic Zone, TTC Industrial Area, Mahape,
Navi Mumbai - 400710 (INDIA)

MECO METERS PRIVATE LTD.
EL-60, MIDC Electronic Zone, TTC Industrial Area, Mahape,
Navi Mumbai - 400710 (INDIA)

Tel. : +91-22-27673311-16 (Sales), 27673300 (Board) **Fax :** +91-22-27673310
Email : sales@mecoinst.com **Web :** www.mecoinst.com **Connect With Us :**