





9A06

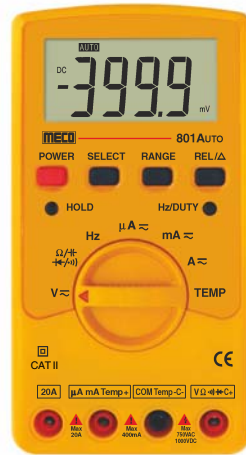


801AUTO

Auto / Manual, 3½ Digit, 2000 Counts LCD, APO & Temperature

Ranges

DC Voltage	200mV/2/20/200/1000V
Accuracy	± (0.5%rdg + 4dgt) on 200mV & 2V, ± (0.7%rdg + 4dgt) on 20V & 200V, ± (1%rdg + 4dgt) on 1000V
AC Voltage	200mV/2/20/200/750V (200mV Manual only)
Accuracy	± (1.0%rdg + 8dgt) on all ranges except ± (1.5%rdg + 8dgt) on 750V
DC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (1.5%rdg + 4dgt)
AC Current	200/2000µA/20/200mA/2/10A
Accuracy	± (2.2%rdg + 4dgt)
Resistance	200Ω/2/20/200kΩ/2/20MΩ
Accuracy	± (0.7%rdg + 4dgt) on all ranges except ± (1.2%rdg + 4dgt) on 2MΩ ± (2.5%rdg + 4dgt) on 20MΩ
Temperature	-20°C~1300°C/-4°F~1999°F
Accuracy	± (2%rdg + 4dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	"  " Indicated
Battery Life	200 hours typical
Dimensions	161 x 86 x 43 mm (approx.)
Weight	250gms Including Battery (approx.)
Measuring Category	CAT II
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case

Auto / Manual, 3¾ Digit, 4000 Counts LCD, APO, Capacitance, Frequency, Duty Cycle & Temperature

Ranges	
DC Voltage	400mV/4/40/400/1000V
Accuracy	± (0.5% rdg + 4 dgt) on 400mV/4V ± (0.7% rdg + 4 dgt) on 40/400V ± (1.0% rdg + 4 dgt) on 1000V
AC Voltage	4/40/400/750V
Accuracy	± (1.0% rdg + 5 dgt) on all ranges except ± (1.5% rdg + 8 dgt) on 750V
DC Current	400/4000µA/40/400mA/4/20A
Accuracy	± (1.5% rdg + 4 dgt)
AC Current	400/4000µA/40/400mA/4/20A
Accuracy	± (2.2% rdg + 4 dgt)
Resistance	400Ω/4/40/400kΩ/4/40MΩ
Accuracy	± (0.7% rdg + 4 dgt) on all ranges except ± (1.2% rdg + 4 dgt) on 4MΩ ± (2.5% rdg + 4 dgt) on 40MΩ
Capacitance	40/400nF/4/40/100µF
Accuracy	± (5.0% rdg + 10 dgt)
Frequency	9.999Hz ~9.999MHz
Accuracy	± (0.5% rdg + 2 dgt)
Duty Cycle	0.1% ~ 99.9%
Accuracy	± (0.5% rdg + 2 dgt)
Temperature	-20°C~1300°C
Accuracy	± (2% rdg + 4 dgt)
Sp. Function	Diode Test, Audible Continuity, Data Hold
Power	Two 1.5V 'AA' Battery
Low Battery	"  " is indicated
Battery Life	200 hours typical
Dimensions	161 x 86 x 43 mm (approx.)
Weight	250gms Including Battery (approx.)
Measuring Category	CAT II
Accessories	One Pair of Test Leads, Battery (installed), K Type Thermocouple (upto 260°C), Inst. Manual & Carrying Case

Accessories

K Type Bead Probe (upto 260°C)

Model : TPK-B



K Type Stick Probe (upto 500°C)

Model : TP-02



Pair of Test Leads suitable for DMM/DTT

Model : TL-DMM/DTT



Pair of Test Leads suitable for Insulation Tester

Model : TL-IT

