





DC Current  
Adaptor

6390



Software Window



### Features

- Right Device to know the TRUE-LIFE of Battery Capacity (Resistance / Voltage / Current & Temperature) Simultaneously
- Measure battery charge / discharge capacity (Ah)
- Measure battery State of Charge SOC (%)
- On-line Testing without shutting down battery
- Built-in Comparator Function
- Rates Conditions as PASS, WARNING or FAIL
- Auto Datalogging Micro SD Card 4GB upto 99 blocks
- Compact and lightweight
- USB Interface & Software
- Load Test Analysis (Charge / Discharge)
- Auto-Hold & Auto-Data Storage
- Wide Range 0 ~1200 Ah
- Auto Power Off
- Memory & Read Function

### Specifications

Battery Types Tested	<b>UPS Battery, Motor Cycle</b> (6V/12V : 2 ~ 20Ah), <b>Car</b> (12V : 21 ~ 80Ah), <b>Truck</b> (12V : 83 ~ 160Ah) <b>Household Appliances</b> [(9V : upto 625mAh), (AA : upto 2850mAh), (AAA : upto 1250mAh), (C : upto 8350mAh), (D : upto 20500mAh)], <b>Lithium Notebook Battery</b> : [(14.8V : 3600 ~ 4800mAh), (11.1V : 3600 ~ 7200mAh)], <b>Lithium Digital Camera Battery</b> : (3.7V : 650 ~ 1350mAh), <b>Lithium Cordless Phone Battery</b> : (3.7V : 800 ~ 1250mAh),
Battery Capacity	0 to 1200Ah
Resistance	<b>Ranges</b> : 4mΩ, 40mΩ, 400mΩ, 4Ω, 40Ω, 400Ω <b>Resolution</b> : 1μΩ, 10μΩ, 100μΩ, 1mΩ, 10mΩ, 100mΩ <b>Accuracy</b> : ± (0.8% rdg + 6 dgt) on all ranges. except ± (3% rdg + 20 dgt) on 4mΩ
Measurement Condition	<b>Current</b> : Approx. 40mA, 4mA, 400μA, 40μA, 4μA <b>Frequency</b> : 1KHz ± 30Hz
DC Voltage	<b>Range</b> : 6V, 60V; <b>Resolution</b> : 1mV, 10mV; <b>Accuracy</b> : ± (0.1% rdg + 6 dgt)
Temperature	<b>Range</b> : -20°C to 60°C (-4°F to 140°F); <b>Resolution</b> : 0.1°C / 0.1°F; <b>Accuracy</b> : ± 1°C / ± 1.8°F
DC Current	<b>Range</b> : 600A; <b>Resolution</b> : 0.1A; <b>Accuracy</b> : ± (2% rdg + 2 dgt)
Open Circuit Voltage	5V max
Datalogging	<b>Manual Datalogging</b> : 999 Sets (Can be read by Meter & Download by PC) <b>Auto Datalogging</b> : <b>Micro SD card 4GB (Max. 99 Blocks)</b>
Comparator	<b>Setting</b> : Resistance Upper and Lower Limits and Voltage (Threshold) Upper and Lower Limit <b>Memory</b> : 99 Sets of Values
Operating Environment	0°C to 40°C (32°F to 104°F), 80% RH or less, Non-condensing
Power Supply	Six 1.5V AA size Alkaline Batteries
Battery life	5.5 Hours
Standard	IEC 61010-1, 1000V Insulation CAT III, Pollution Degree 2
Dimensions / Weight	198 x 94 x 49 mm (approx.) / 530 gms Including Battery (approx.)
Accessories	Alligator Clip Type Test Lead with Temperature Sensor x1, Pin Type Test Lead x 1, DC Current Adaptor x 1, Zero Adjustment Board x 1, Instruction Manual x 1, AA 1.5V Batteries x 6, AC Adaptor x 1, 4GB Micro SD Card (installed) x 1, USB Cable x 1, PC Software Disk x 1 & Carrying Bag x 1

### Resistance Measurement

Range	Resolution	Measurement Current	Accuracy
4mΩ	1μΩ	40mA approx.	± (3% rdg ± 20 dgt)
40mΩ	10μΩ	40mA approx.	
400mΩ	100μΩ	4mA approx.	
4Ω	1mΩ	400μA approx.	± (0.8% rdg ± 6 dgt)
40Ω	10mΩ	40μA approx.	
400Ω	100mΩ	4μA approx.	

Measuring Current Frequency : 1KHz ± 30Hz

### Voltage Measurement

Range	Resolution	Accuracy
6V	1mV	± (0.1% rdg ± 6 dgt)
60V	10mV	

Maximum Input Voltage : 60VDC maximum. No AC Voltage Input.


### Temperature Measurement

Range	Resolution	Accuracy
-20°C to 60°C	0.1°C	± 1.0°C
-4°F to 140°F	0.1°F	± 1.8°F


### DC Current Measurement

Range	Sensitivity	Resolution	Accuracy
600A	0.6A ~ 600.0A	0.1A	± (2.0% rdg ± 2 dgts)

### Zero Adjustment Using Pin Type Test Lead

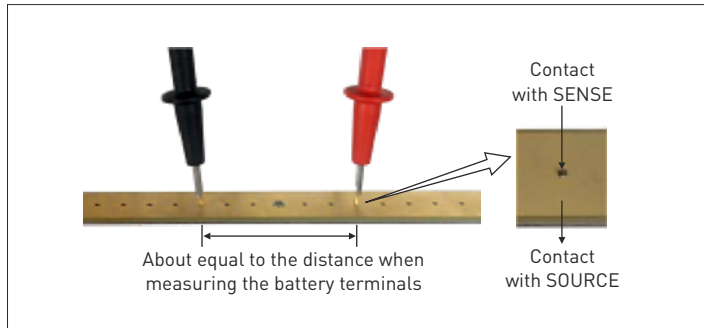

### Input Terminals

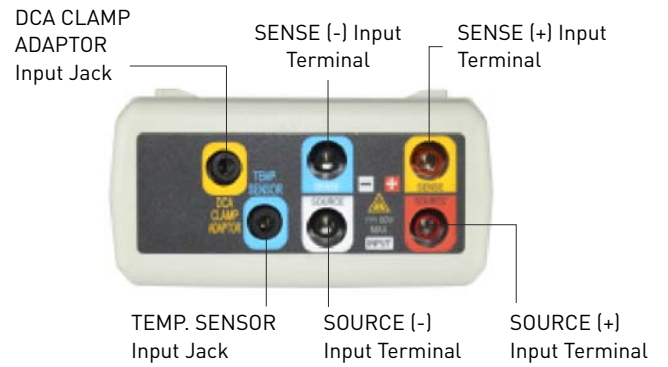

### Usage



### Zero Adjustment Using Clip Type Test Lead

