



4671A


**Features**

- 10μA Ultra High Resolution
- Large Conductor Diameter (30mm)
- AC Current in 4 Ranges (20mA, 200mA, 2A, 60A)
- Wide Frequency Response (40Hz~400Hz)
- AC A, AC V, DC V
- Large 3½ Digit LCD (1999 Count)
- Data Hold
- Low Battery Indication
- Auto Power Off
- Wristlet

**General Specifications**

<b>Jaw Opening</b>	Cable Dia 30mm. max. (approx.)
<b>Power</b>	Two 1.5V 'AAA' Battery
<b>Display</b>	3½ Digits 1999 Counts LCD
<b>Range Selection</b>	Manual
<b>Overload Indication</b>	OL
<b>Power Consumption</b>	15mA (approx.)
<b>Low Battery Indication</b>	
<b>Sampling Time</b>	3 time/sec.
<b>Operating Environment</b>	-10° to 50°C, RH < 85%
<b>Storage Environment</b>	-20°C to 60°C, RH < 75%
<b>Altitude</b>	up to 2000M
<b>Dimensions</b>	183 x 63 x 29 mm
<b>Weight</b>	160gms Including Battery (approx.)
<b>Accessories</b>	Battery (installed), Test Leads x 1 pair, Carrying Case x 1, Users Manual x 1

**Fault Tracing of Live Installation**

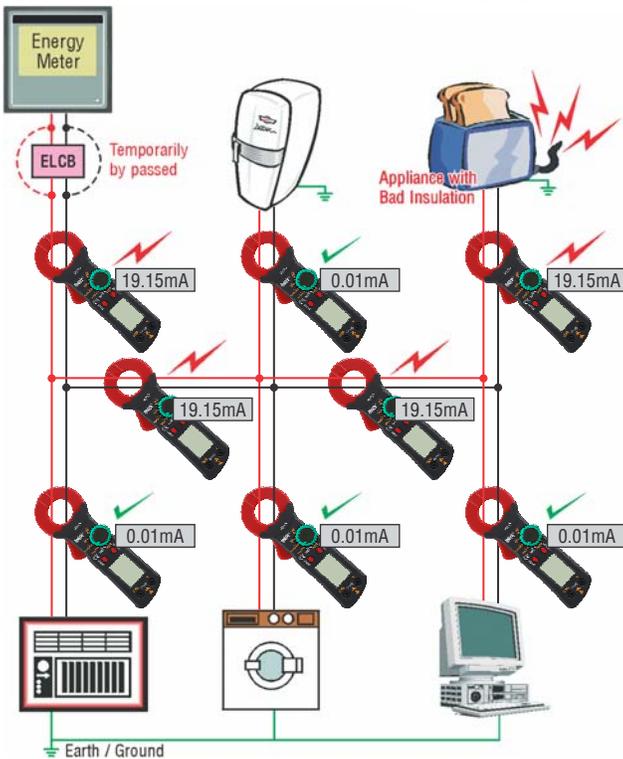

**Specifications** (23°C ±5°C)

AC Current (40Hz ~ 400Hz)		
Range	Resolution	Accuracy
20 mA	0.01 mA	±(2.5%rdg ± 5dpts)
200 mA	0.1 mA	
2 A	0.001 A	±(3.0%rdg ± 8dpts)
60 A	0.1 A	

Though the Meter can Display upto 200A, the Calibration is valid upto 60A

AC Voltage (40Hz ~ 400Hz)		
Range	Resolution	Accuracy
600V	1V	±(2.0%rdg ± 5dpts)

DC Voltage		
Range	Resolution	Accuracy
600V	1V	±(2.0%rdg ± 5dpts)

**Application**

