




TPT

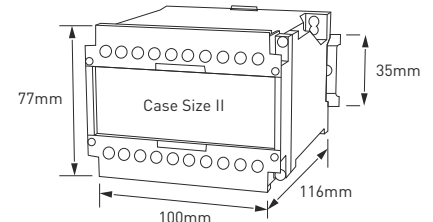

MECO Tap position Transducer takes various Resistance inputs and provides a Stable, Ripple-Free and Optically Isolated DC load independent output in the form of current or voltage. The output can be connected to Controllers, Data-Loggers, PLC's, Analog / Digital Indicators, Recorders for display, analysis or control. They are ideal for SCADA, Energy Management, Telemetry for Remote, Local as well as Central Monitoring Systems.

Model : TPT (DIN Series)			Accuracy : ±0.5% of Span				
Resistance Input Resistance input from potentiometric transformer tap positions upto 99 transformer taps. 100 KOhms max.	DC Output				Auxiliary Power Supply		
	Current		Voltage		Tolerance		Burden
	Output	Load	Output	Load	SMPS - HV	85 - 265V AC / DC	< 2.5 VA
	0-1 mA	0-10 KΩ	0-1 V	> 1 kΩ			
	0-5 mA	0-2 KΩ	0-5 V	> 5 kΩ			
	0-10 mA	0-1 KΩ	1-5 V		SMPS - LV	19 - 90V AC / DC	
	2-10 mA		0-10 V	>10 kΩ			
	0-20 mA	*0-500Ω	2-10 V		AC Linear Power Supply	110 V ± 20 %	< 4 VA
	4-20 mA					230 V ± 20 %	

Optional

- Other input ranges available subject to technical feasibility

Optional

- Dual Non-Isolated Outputs
- Dual Symmetrical & Asymmetrical Outputs
- Bi-directional Outputs
- Other output ranges available subject to technical feasibility
- *0-600 Ω / 0-750 Ω on Request

Optional


- Other Auxiliary Power Supplies available subject to technical feasibility

Dimension

DIN Series : ■ Case Size II

Note : ■ For Details refer General & Technical Specifications Page

Connection Diagram

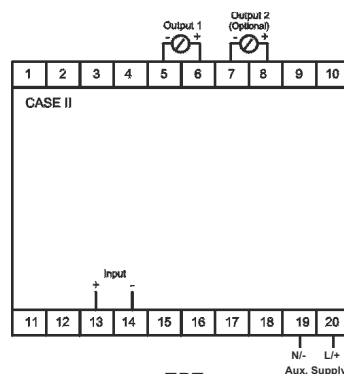

TPT

Specifications

Accuracy	± 0.5% of Span (standard) Others on request (optional)	Warm Up Time	20 min. (approx.)
Accuracy Range	0 to 120%	Dielectric Strength	2.5kV at 50 Hz for 1 min.(Standard) 4kV (Optional), across Casing - Input/Output/Auxiliary Input - Output Input - Auxiliary Output - Auxiliary
Zero Adjustment	± 2% of Span (min.)	Impulse Test	5kV, 1.2 / 50µS
Span Adjustment	± 10% of Span (min.)	Casing	DIN Series Flame Retardant, Polycarbonate (UL 94V-0) Self Extinguishing, Non Drip, DIN Rail cum Wall Mounting Casing
Response Time	< 250 ms for 0 to 90% of Output < 1 s for 0 to 90% of Output for PF	Applicable Standards	IEC 688 / EN 60688 Electrical Measuring Transducers for converting AC Electrical Quantities to Analog or Digital Signals EN 61010-1 Safety requirements for Electrical Equipment for Measurement Control & Laboratory use EN 61326-1 Electrical Equipment for Measurement Control & Laboratory use - EMC requirements IS12784 (Part-1)1989 Electrical Measuring Transducers for converting AC Electrical Quantities into DC Electrical Quantities : General Purpose Transducer
Output Ripple	< 0.5% of Full Scale		
Compliance Voltage	12VDC (max.)		
Overload -Continuous	Voltage : 1.2 x Un Current : 2 x In		
Overload -Short Duration (1 sec.)	Voltage : 2 x Un Current : 20 x In (one time)		
Max. Open Circuit Voltage	< 30VDC		
Stability	± 0.25% Per Annum, Non Cumulative		
Environmental Conditions	As per IEC 688 User Group II		
Operating Temperature	0 to 55°C, RH < 95% (non condensing)		
Storage Temperature	-20 to 70°C, RH < 95% (non condensing)		
Calibrated At	27°C ± 5°C		
Temperature Coefficient	0.02% / °C		
Isolation	Complete (Input/Output/Auxiliary/ Case)		
Insulation Resistance	>100MΩ at 500VDC		
Self Powered (optional)	Max.Variation of ± 20% in input voltage		

Ordering Information

Model, Input Range, Input Voltage, Input Current, PTR, CTR, Frequency, Auxiliary Supply, Output 1, Output 2 & Optionals

Dimensions (in mm)

